



50 ch x 250 Gbit/s 32-QAM Transmission over a Fully Integrated 7-core Multicore Link

Castro, C.; Jain, S.; Jung, Y.; De Man, E.; Calabrò, S.; Pulverer, K.; Bohn, M.; Hayes, J. R.; Alam, S. U.; Richardson, D. J.

Total number of authors:
14

Published in:
2017 European Conference on Optical Communication (ECOC)

Link to article, DOI:
[10.1109/ECOC.2017.8345849](https://doi.org/10.1109/ECOC.2017.8345849)

Publication date:
2017

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Castro, C., Jain, S., Jung, Y., De Man, E., Calabrò, S., Pulverer, K., Bohn, M., Hayes, J. R., Alam, S. U., Richardson, D. J., Sasaki, Y., Mizuno, T., Morioka, T., & Rosenkantz, W. (2017). 50 ch x 250 Gbit/s 32-QAM Transmission over a Fully Integrated 7-core Multicore Link. In *2017 European Conference on Optical Communication (ECOC)* Article M.1.E.5 IEEE. <https://doi.org/10.1109/ECOC.2017.8345849>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

50 ch x 250 Gbit/s 32-QAM transmission over a fully integrated 7-core multicore link

C. Castro^(1,3,*), S. Jain⁽²⁾, Y. Jung⁽²⁾, E. De Man⁽¹⁾, S. Calabrò⁽¹⁾, K. Pulverer⁽¹⁾, M. Bohn⁽¹⁾, J. R. Hayes⁽²⁾, S. U. Alam⁽²⁾, D. J. Richardson⁽²⁾, Y. Sasaki⁽⁴⁾, T. Mizuno⁽⁵⁾, Y. Miyamoto⁽⁵⁾, T. Morioka⁽⁶⁾, W. Rosenkranz⁽³⁾

⁽¹⁾ Coriant R&D GmbH, St.-Martin-Straße 75, 81541, München, Germany

⁽²⁾ Optoelectronics Research Centre, University of Southampton, Southampton, SO17 1BJ, UK

⁽³⁾ Chair of Communications, Christian-Albrechts-Universität zu Kiel, Kaiserstraße 2, 24143, Kiel, Germany

⁽⁴⁾ Advanced Technology Laboratory, Fujikura Ltd., 1440, Mutsuzaki, Sakura, Chiba, 285-8550, Japan.

⁽⁵⁾ NTT Network Innovation Laboratories, NTT Corporation, 1-1 Hikari-no-oka, Yokosuka, Kanagawa, 239-0847, Japan

⁽⁶⁾ DTU Fotonik, 2800 Kgs. Lyngby, Denmark

^(*) Corresponding author: ccas@tf.uni-kiel.de

Abstract A transmitted distance of 180 km over an integrated multicore link is demonstrated for a C-band 32-QAM WDM system, where the complete usable amplification region of the integrated 7-core amplifiers, supporting 50 channels per core, is exploited.

Introduction

Multicore fibre (MCF) transmission, a type of space division multiplexing (SDM) relying upon encompassing several spatial paths within a single cladding structure, represents a promising technology for accommodating the increasing data rates required for future applications¹. Over the past few years, MCF-systems have been shown to be capable of exhibiting sufficiently low crosstalk to support transoceanic transmission distances^{2,3}, have transmitted high-order modulation formats⁴ and achieved high-data rates while promising to be cost-efficient⁵. Nevertheless, to truly demonstrate the potential of MCF-systems, it is important to investigate their performance on realistic transmission links with integrated components in order to illustrate the practical challenges and the possible economical advantages of SDM. The integration of multicore components has allowed for fully spliced repeatered systems to be constructed^{6,7}, however the focus has been on the multicore components or the transmission characteristics in a reduced area of the C-band. In this paper, we transmit a signal with 50 WDM channels, fully occupying the usable amplification region of our current 7-core cladding-pumped erbium-ytterbium-doped fibre amplifiers (MC-EYDFAs). A high-order modulation format is used to demonstrate high capacity transmission through an integrated multicore link (IML) in a recirculating loop.

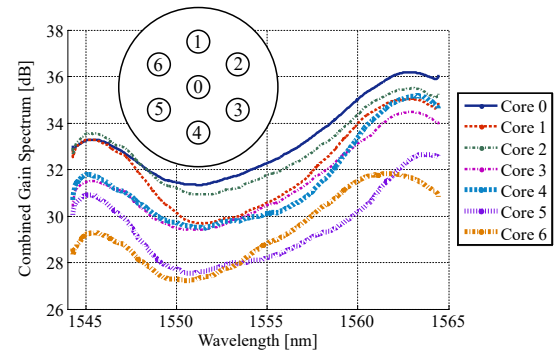


Fig. 1: Structure of the MCF and cascaded gain spectrum of both MC-EYDFAs for one loop iteration corresponding to pump currents of 3.0 A and 2.2 A (loss caused by the fiber and fan-in/fan-out couplers is neglected).

Integrated 7-core repeatered link

The multicore link⁷ consists of a homogenous trench-assisted 7-core MCF with a hexagonal core layout (Fig. 1), spliced together with two MC-EYDFAs in order to compensate for fibre attenuation and the loss caused by the elements in the recirculating loop, and integrated fan-in/fan-out couplers based on free-space optics. Because the adopted setup does not allow us to measure the launch power of the cores directly at the input of the MCF, we have to optimize our system by sweeping the pump current levels and evaluating the BER performance for a 16-QAM channel after 240 km. Taking into account that different cores might have different optimal pump currents, we compared the best performing settings for the centre core (core 0) and two of the outer cores (core 5 and core 6), and proceeded to obtain an

that the channels at longer wavelengths perform slightly better compared to channels at the shorter end of the spectrum due to the gain variation between cores.

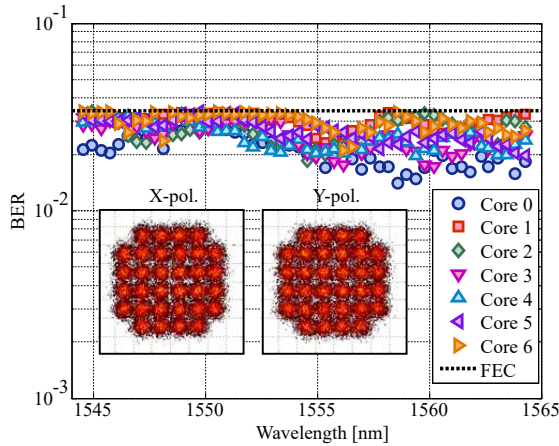


Fig. 3: BER measurements after 180 km using a recirculating loop and an IML for the 32-QAM channel at different wavelengths. As insets, the constellation diagrams for a BER value of $3.4 \cdot 10^{-2}$ are shown.

Although the practical maximum transmitted distance for all 50 channels is 180 km due to some channels being too close to the FEC threshold, it is important to notice that some measurements for channels at longer wavelengths exhibit lower BER values that indicate that they are able to reach larger distances. This leads us to believe that the overall performance of the various cores is dominated by noise instead of crosstalk for a transmission distance of 180 km. This would also support the observation that core 0, corresponding to the middle core, performs slightly better than the outer cores (cores 1-6) despite being exposed to higher cross-talk levels.

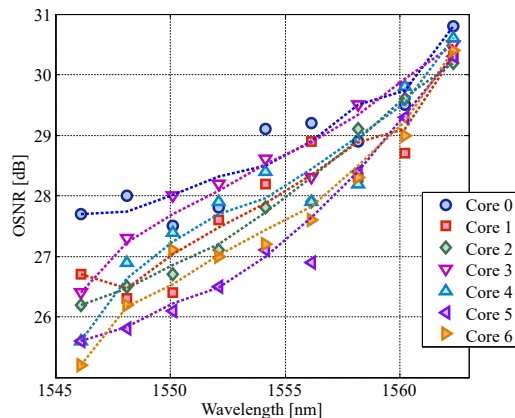


Fig. 4: OSNR measurements for all seven cores of the MCF. Figure 4 displays the OSNR measurements after 180 km for 9 uniformly spaced channels between 1546 nm and 1562 nm. OSNR readings match the observations extracted from Fig. 3, confirming that the cores with the lowest OSNR

readings correspond to the cores with the worst BER performance (core 1, core 5, and core 6); whereas core 0, the best amplified core in the system, consistently displays a better performance than the rest across the analysed wavelength range.

Conclusions

Using a 50 GHz channel grid, we have transmitted 50 channels per core using an integrated 7-core repeatered MCF-system, where the 250 Gbit/s 32-QAM test channel reaches distances over 180 km for the entire wavelength range between 1544 nm and 1564 nm. Using the complete usable amplification region of the cladding-pumped amplifiers, we virtually demonstrate a total capacity of 87.5 Tbit/s for the complete MCF-system, corresponding to a spectral efficiency of 35 b/s/Hz.

Acknowledgements

This project was supported by the EU-Japan coordinated R&D project on “Scalable And Flexible optical Architecture for Reconfigurable Infrastructure (SAFARI)” commissioned by the Ministry of Internal Affairs and Communications (MIC) of Japan and EC Horizon 2020.

References

- [1] D. J. Richardson et al., “Space Division Multiplexing in Optical Fibers”, *Nature Photonics* 7, pp. 356-362, 2013.
- [2] K. Igarashi, “110.9-Tbit/s SDM transmission over 6,370 km using a full C-band seven-core EDFA”, *Optics Express*, Vol. 21, No. 5, pp. 18053-18060.
- [3] T. Hayashi et al., “Ultra-Low-Crosstalk Multi-Core Fiber Feasible to Ultra-Long-Transmission”, *OFC Post Deadline paper PDPC2*, Los Angeles (2011).
- [4] H. Takara et al., “120.7-Tb/s MCF-ROPA Unrepeated Transmission of PDM-32QAM Channels Over 204 km”, *Journal of Lightwave Technology*, Vol. 33, No. 7, pp. 1473-1478, 2015.
- [5] T. Kobayashi et al., “1-Pb/s (32 SDM/46 WDM/768 Gb/s) C-band Dense SDM Transmission over 205.6-km of Single-mode Heterogeneous Multi-core Fiber using 96-Gbaud PDM-16QAM Channels”, *OFC Post Deadline paper Th5B1*, Los Angeles (2017).
- [6] S. Jain et al., “32-core Inline Multicore Fiber Amplifier for Dense Space Division Multiplexed Transmission Systems”, *ECOC Post Deadline paper Th3A1*, Düsseldorf (2016).
- [7] C. Castro et al., “200 Gbit/s 16QAM WDM Transmission over a Fully Integrated Cladding Pumped 7-Core MCF System”, *Proc. OFC*, paper Th1C2, Los Angeles (2017).