

TIME-VARYING CLOCK OFFSET ESTIMATION IN TWO-WAY TIMING MESSAGE EXCHANGE IN WIRELESS SENSOR NETWORKS USING FACTOR GRAPHS[‡]

Aitzaz Ahmad*, Davide Zennaro[†], Erchin Serpedin*, Lorenzo Vangelista[†]

*Department of ECE, Texas A&M University, Texas, TX, 77843 USA.

[†]Department of Information Engineering, University of Padova, Padova, Italy.

ABSTRACT

The problem of clock offset estimation in a two-way timing exchange regime is considered when the likelihood function of the observation time stamps is exponentially distributed. In order to capture the imperfections in node oscillators, which render a time-varying nature to the clock offset, a novel Bayesian approach to the clock offset estimation is proposed using a factor graph representation of the posterior density. Message passing using the max-product algorithm yields a closed form expression for the Bayesian inference problem.

Index Terms— Clock offset, factor graphs, message passing, max-product algorithm

1. INTRODUCTION

Clock synchronization in wireless sensor networks (WSN) is a critical component in data fusion and duty cycling, and has gained widespread interest in recent years [1]. Most of the current methods consider sensor networks exchanging time stamps based on the time at their respective clocks [2]. In a *two-way* timing exchange process, adjacent nodes aim to achieve pairwise synchronization by communicating their timing information with each other. After a round of N messages, each node tries to estimate its own clock parameters. A representative protocol of this class is the timing-sync protocol for sensor networks (TPSNs) which uses this strategy in two phases to synchronize clocks in a network [3].

The clock synchronization problem in a WSN offers a natural statistical signal processing framework [4]. Assuming an exponential delay distribution, several estimators were proposed in [5]. It was argued that when the propagation delay d is unknown, the maximum likelihood (ML) estimator for the clock offset θ is not unique. However, it was shown in [6] that the ML estimator of θ does exist uniquely for the case of unknown d . The performance of these estimators was compared

with benchmark estimation bounds in [7]. A common theme in the aforementioned contributions is that the effect of possible time variations in clock offset, arising from imperfect oscillators, is not incorporated and hence, they entail frequent re-synchronization requirements.

In this work, assuming an exponential distribution for the network delays, a closed form solution to clock offset estimation is presented by considering the clock offset as a random Gauss-Markov process. Bayesian inference is performed using factor graphs and the max-product algorithm.

2. SYSTEM MODEL

By assuming that the respective clocks of a sender node S and a receiver node R are related by $C_R(t) = \theta + C_S(t)$ at real time t , the two-way timing message exchange model at the k th instant can be represented as [5] [6]

$$U_k = d + \theta + X_k, \quad V_k = d - \theta + Y_k \quad (1)$$

where d represents the propagation delay, assumed symmetric in both directions, and θ is offset of the clock at node R relative to the clock at node S . The network delays, X_k and Y_k , are the independent exponential random variables. By further defining $\xi \triangleq d + \theta$ and $\psi \triangleq d - \theta$, the model in (1) can be written as

$$U_k = \xi + X_k, \quad V_k = \psi + Y_k \quad (2)$$

for $k = 1, \dots, N$. The imperfections introduced by environmental conditions in the quartz oscillator in sensor nodes result in a time-varying clock offset between nodes in a WSN. In order to sufficiently capture these temporal variations, the parameters ξ and ψ are assumed to evolve through a Gauss-Markov process given by

$$\xi_k = \xi_{k-1} + w_k, \quad \psi_k = \psi_{k-1} + v_k \quad \text{for } k = 1, \dots, N$$

where w_k and v_k are *i.i.d* such that $w_k, v_k \sim \mathcal{N}(0, \sigma^2)$. The goal is to determine precise estimates of ξ and ψ in the Bayesian framework using observations $\{U_k, V_k\}_{k=1}^N$. An estimate of θ can, in turn, be obtained as

$$\hat{\theta} = \frac{\hat{\xi} - \hat{\psi}}{2}. \quad (3)$$

*The work of A. Ahmad and E. Serpedin is supported by Qtel.

[†]The work of D. Zennaro is partially supported by an "A. Gini" fellowship and has been performed while on leave at Texas A&M University, College Station, TX (USA).

[‡]An extended version of this work has been submitted to IEEE Transactions on Information Theory.

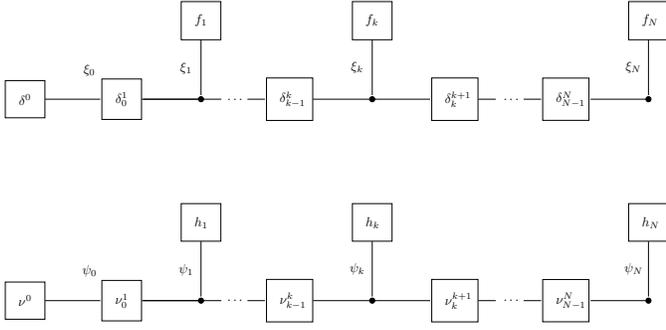


Fig. 1. Factor graph representation of posterior density (4)

3. A FACTOR GRAPH APPROACH

The posterior pdf can be expressed as

$$\begin{aligned}
 f(\xi, \psi | U, V) &\propto f(\xi, \psi) f(U, V | \xi, \psi) \\
 &= f(\xi_0) \prod_{k=1}^N f(\xi_k | \xi_{k-1}) f(\psi_0) \prod_{k=1}^N f(\psi_k | \psi_{k-1}) \\
 &\quad \cdot \prod_{k=1}^N f(U_k | \xi_k) f(V_k | \psi_k) \quad (4)
 \end{aligned}$$

where uniform priors $f(\xi_0)$ and $f(\psi_0)$ are assumed. Define $\delta_{k-1}^k \triangleq f(\xi_k | \xi_{k-1}) \sim \mathcal{N}(\xi_k - \xi_{k-1}, \sigma^2)$, $\nu_{k-1}^k \triangleq f(\psi_k | \psi_{k-1}) \sim \mathcal{N}(\psi_k - \psi_{k-1}, \sigma^2)$, $f_k \triangleq f(U_k | \xi_k)$, $h_k \triangleq f(V_k | \psi_k)$, where the likelihood functions are given by

$$\begin{aligned}
 f(U_k | \xi_k) &= \lambda_\xi \exp(-\lambda_\xi (U_k - \xi_k)) \mathbb{I}(U_k - \xi_k) \\
 f(V_k | \psi_k) &= \lambda_\psi \exp(-\lambda_\psi (V_k - \psi_k)) \mathbb{I}(V_k - \psi_k). \quad (5)
 \end{aligned}$$

The factor graph representation of the posterior pdf is shown in Fig. 1. The factor graph is cycle-free and inference by message passing is indeed optimal. In addition, the two factor graphs shown in Fig. 1 have a similar structure and hence, message computations will only be shown for the estimate $\hat{\xi}_N$. Clearly, similar expressions will apply to $\hat{\psi}_N$.

The message updates in factor graph using max-product can be computed as follows

$$\begin{aligned}
 m_{f_N \rightarrow \xi_N} &= f_N, \quad m_{\xi_N \rightarrow \delta_{N-1}^N} = f_N \\
 m_{\delta_{N-1}^N \rightarrow \xi_{N-1}} &\propto \max_{\xi_N} \delta_{N-1}^N \cdot m_{\xi_N \rightarrow \delta_{N-1}^N} \\
 &= \max_{\xi_N} \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(\xi_N - \xi_{N-1})^2}{2\sigma^2}\right) \\
 &\quad \cdot \exp(\lambda_\xi \xi_N) \mathbb{I}(U_N - \xi_N)
 \end{aligned}$$

which can be rearranged as

$$m_{\delta_{N-1}^N \rightarrow \xi_{N-1}} \propto \max_{\xi_N \leq U_N} \exp(A_{\xi,N} \xi_N^2 + B_{\xi,N} \xi_{N-1}^2 + C_{\xi,N} \xi_N \xi_{N-1} + D_{\xi,N} \xi_N) \quad (6)$$

where

$$\begin{aligned}
 A_{\xi,N} &\triangleq -\frac{1}{2\sigma^2}, \quad B_{\xi,N} \triangleq -\frac{1}{2\sigma^2} \\
 C_{\xi,N} &\triangleq \frac{1}{\sigma^2}, \quad D_{\xi,N} \triangleq \lambda_\xi. \quad (7)
 \end{aligned}$$

Let $\bar{\xi}_N$ be the unconstrained maximizer of the exponent in the objective function above, i.e.,

$$\begin{aligned}
 \bar{\xi}_N &= \arg \max_{\xi_N} (A_{\xi,N} \xi_N^2 + B_{\xi,N} \xi_{N-1}^2 + C_{\xi,N} \xi_N \xi_{N-1} + \\
 &\quad D_{\xi,N} \xi_N).
 \end{aligned}$$

This implies that

$$\bar{\xi}_N = -\frac{C_{\xi,N} \xi_{N-1} + D_{\xi,N}}{2A_{\xi,N}}. \quad (8)$$

If $\bar{\xi}_N > U_N$, then the estimation problem is solved, since $\hat{\xi}_N = U_N$. However, if $\bar{\xi}_N \leq U_N$, the solution is $\hat{\xi}_N = \bar{\xi}_N$. Therefore, in general, we can write

$$\hat{\xi}_N = \min(\bar{\xi}_N, U_N).$$

Notice that $\bar{\xi}_N$ depends on ξ_{N-1} , which is undetermined at this stage. Hence, we need to further traverse the chain backwards. Assuming that $\bar{\xi}_N \leq U_N$, $\bar{\xi}_N$ from (8) can be plugged back in (6) which after some simplification yields

$$\begin{aligned}
 m_{\delta_{N-1}^N \rightarrow \xi_{N-1}} &\propto \exp\left\{\left(B_{\xi,N} - \frac{C_{\xi,N}^2}{4A_{\xi,N}}\right) \xi_{N-1}^2 - \right. \\
 &\quad \left. \frac{C_{\xi,N} D_{\xi,N}}{2A_{\xi,N}} \xi_{N-1}\right\}. \quad (9)
 \end{aligned}$$

Similarly the message from the factor δ_{N-2}^{N-1} to the variable node ξ_{N-2} can be expressed as

$$\begin{aligned}
 m_{\delta_{N-2}^{N-1} \rightarrow \xi_{N-2}} &\propto \max_{\xi_{N-1} \leq U_{N-1}} \delta_{N-2}^{N-1} \cdot m_{\xi_{N-1} \rightarrow \delta_{N-2}^{N-1}} \\
 &= \max_{\xi_{N-1}} \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(\xi_{N-1} - \xi_{N-2})^2}{2\sigma^2}\right) \\
 &\quad \cdot \exp\left\{\left(B_{\xi,N} - \frac{C_{\xi,N}^2}{4A_{\xi,N}}\right) \xi_{N-1}^2 - \frac{C_{\xi,N} D_{\xi,N}}{2A_{\xi,N}} \xi_{N-1}\right\} \\
 &\quad \cdot \exp(\lambda_\xi \xi_{N-1}) \mathbb{I}(U_{N-1} - \xi_{N-1}).
 \end{aligned}$$

The message above can be compactly represented as

$$\begin{aligned}
 m_{\delta_{N-2}^{N-1} \rightarrow \xi_{N-2}} &\propto \max_{\xi_{N-1} \leq U_{N-1}} \exp(A_{\xi,N-1} \xi_{N-1}^2 + \\
 &\quad B_{\xi,N-1} \xi_{N-2}^2 + C_{\xi,N-1} \xi_{N-1} \xi_{N-2} + D_{\xi,N-1} \xi_{N-1}) \quad (10)
 \end{aligned}$$

where

$$\begin{aligned}
 A_{\xi,N-1} &\triangleq -\frac{1}{2\sigma^2} + B_{\xi,N} - \frac{C_{\xi,N}^2}{4A_{\xi,N}}, \\
 B_{\xi,N-1} &\triangleq -\frac{1}{2\sigma^2}, \quad C_{\xi,N-1} \triangleq \frac{1}{\sigma^2} \\
 D_{\xi,N-1} &\triangleq \lambda_\xi - \frac{C_{\xi,N} D_{\xi,N}}{2A_{\xi,N}}.
 \end{aligned}$$

Proceeding as before, the unconstrained maximizer $\bar{\xi}_{N-1}$ of the objective function above is given by

$$\bar{\xi}_{N-1} = -\frac{C_{\xi,N-1}\xi_{N-2} + D_{\xi,N-1}}{2A_{\xi,N-1}}$$

and the solution to the maximization problem (10) is expressed as

$$\hat{\xi}_{N-1} = \min(\bar{\xi}_{N-1}, U_{N-1}) .$$

Again, $\bar{\xi}_{N-1}$ depends on ξ_{N-2} and therefore, the solution demands another traversal backwards on the factor graph representation in Fig. 1. By plugging $\bar{\xi}_{N-1}$ back in (10), it follows that

$$m_{\delta_{N-2}^{\xi_{N-1}} \rightarrow \xi_{N-2}} \propto \exp \left\{ \left(B_{\xi,N-1} - \frac{C_{\xi,N-1}^2}{4A_{\xi,N-1}} \right) \xi_{N-2}^2 - \frac{C_{\xi,N-1}D_{\xi,N-1}}{2A_{\xi,N-1}} \xi_{N-2} \right\} \text{ where} \quad (11)$$

which has a form similar to (9). It is clear that one can keep traversing back in the graph yielding messages similar to (9) and (11). In general, for $i = 1, \dots, N-1$, we can write

$$\begin{aligned} A_{\xi,N-i} &\triangleq -\frac{1}{2\sigma^2} + B_{\xi,N-i+1} - \frac{C_{\xi,N-i+1}^2}{4A_{\xi,N-i+1}} \\ B_{\xi,N-i} &\triangleq -\frac{1}{2\sigma^2}, \quad C_{\xi,N-i} \triangleq \frac{1}{\sigma^2} \\ D_{\xi,N-i} &\triangleq \lambda_\xi - \frac{C_{\xi,N-i+1}D_{\xi,N-i+1}}{2A_{\xi,N-i+1}} \end{aligned} \quad (12)$$

and

$$\bar{\xi}_{N-i} = -\frac{C_{\xi,N-i}\xi_{N-i-1} + D_{\xi,N-i}}{2A_{\xi,N-i}} \quad (13)$$

$$\hat{\xi}_{N-i} = \min(\bar{\xi}_{N-i}, U_{N-i}) . \quad (14)$$

Using (13) and (14) with $i = N-1$, it follows that

$$\bar{\xi}_1 = -\frac{C_{\xi,1}\xi_0 + D_{\xi,1}}{2A_{\xi,1}}, \quad \hat{\xi}_1 = \min(\bar{\xi}_1, U_1) . \quad (15)$$

Similarly, by observing the form of (9) and (11), it follows that

$$m_{\delta_0^{\xi_1} \rightarrow \xi_0} \propto \exp \left\{ \left(B_{\xi,1} - \frac{C_{\xi,1}^2}{4A_{\xi,1}} \right) \xi_0^2 - \frac{C_{\xi,1}D_{\xi,1}}{2A_{\xi,1}} \xi_0 \right\} . \quad (16)$$

The estimate $\hat{\xi}_0$ can be obtained by maximizing (16).

$$\hat{\xi}_0 = \bar{\xi}_0 = \max_{\xi_0} m_{\delta_0^{\xi_1} \rightarrow \xi_0} = \frac{C_{\xi,1}D_{\xi,1}}{4A_{\xi,1}B_{\xi,1} - C_{\xi,1}^2} . \quad (17)$$

The estimate in (17) can now be substituted in (15) to yield $\bar{\xi}_1$, which can then be used to solve for $\hat{\xi}_1$. Clearly, this chain of calculations can be continued using recursions (13) and (14). Define

$$g_{\xi,k}(x) \triangleq -\frac{C_{\xi,k}x + D_{\xi,k}}{2A_{\xi,k}} . \quad (18)$$

Lemma 1 For real numbers a and b , the function $g_{\xi,k}(\cdot)$ defined in (18) satisfies

$$g_{\xi,k}(\min(a, b)) = \min(g_{\xi,k}(a), g_{\xi,k}(b)) .$$

Proof: The constants $A_{\xi,k}$, $C_{\xi,k}$ and $D_{\xi,k}$ are defined in (7) and (12). The proof follows by noting that $\frac{-C_{\xi,k}}{2A_{\xi,k}} > 0$ which implies that $g_{\xi,k}(\cdot)$ is a monotonically increasing function.

Using the notation $g_{\xi,k}(\cdot)$, it follows that

$$\begin{aligned} \bar{\xi}_1 &= g_{\xi,1}(\hat{\xi}_0), \quad \hat{\xi}_1 = \min(U_1, g_{\xi,1}(\hat{\xi}_0)) \\ \bar{\xi}_2 &= g_{\xi,2}(\hat{\xi}_1), \quad \hat{\xi}_2 = \min(U_2, g_{\xi,2}(\hat{\xi}_1)) \\ g_{\xi,2}(\hat{\xi}_1) &= g_{\xi,2}(\min(U_1, g_{\xi,1}(\hat{\xi}_0))) \\ &= \min(g_{\xi,2}(U_1), g_{\xi,2}(g_{\xi,1}(\hat{\xi}_0))) \end{aligned} \quad (19)$$

where (19) follows from Lemma 1. The estimate $\hat{\xi}_2$ can be expressed as

$$\begin{aligned} \hat{\xi}_2 &= \min(U_2, \min(g_{\xi,2}(U_1), g_{\xi,2}(g_{\xi,1}(\hat{\xi}_0)))) \\ &= \min(U_2, g_{\xi,2}(U_1), g_{\xi,2}(g_{\xi,1}(\hat{\xi}_0))) . \end{aligned}$$

Hence, one can keep estimating $\hat{\xi}_k$ at each stage using this strategy. Note that the estimator only depends on functions of data and can be readily evaluated. For $m \geq k$, define

$$G_{\xi,k}^m(\cdot) \triangleq g_{\xi,m}(g_{\xi,m-1} \dots g_{\xi,k}(\cdot)) . \quad (20)$$

The estimate $\hat{\xi}_N$ can, therefore, be compactly represented as

$$\hat{\xi}_N = \min(U_N, G_{\xi,N}^N(U_{N-1}), \dots, G_{\xi,2}^N(U_1), G_{\xi,1}^N(\hat{\xi}_0)) . \quad (21)$$

By a similar reasoning, the estimate $\hat{\psi}_N$ can be analogously expressed as

$$\hat{\psi}_N = \min(V_N, G_{\psi,N}^N(V_{N-1}), \dots, G_{\psi,2}^N(V_1), G_{\psi,1}^N(\hat{\psi}_0))$$

and the factor graph based clock offset estimate (FGE) $\hat{\theta}_N$ is given by

$$\hat{\theta}_N = \frac{\hat{\xi}_N - \hat{\psi}_N}{2} . \quad (22)$$

It only remains to calculate the functions of data $G(\cdot)$ in the expressions for $\hat{\xi}_N$ and $\hat{\psi}_N$ to determine the FGE estimate $\hat{\theta}_N$. With the constants defined in (7), it follows that

$$G_{\xi,N}^N(U_{N-1}) = -\frac{C_{\xi,N}U_{N-1} + D_{\xi,N}}{2A_{\xi,N}} = U_{N-1} + \lambda_\xi \sigma^2 .$$

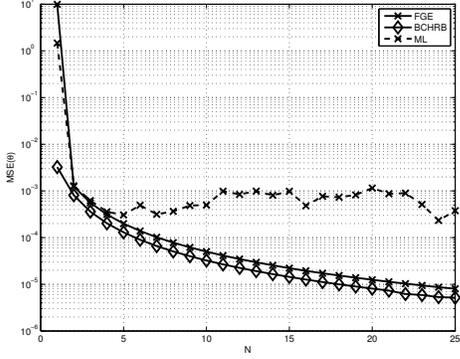


Fig. 2. Comparison of MSE of $\hat{\theta}_N$ and $\hat{\theta}_{ML}$.

Similarly it can be shown that

$$G_{\xi, N-1}^N(U_{N-2}) = U_{N-2} + 2\lambda_\xi \sigma^2$$

and so on. Using the constants defined in (12) for $i = N-1$, it can be shown that $\hat{\xi}_0 = \frac{C_{\xi,1} D_{\xi,1}}{4A_{\xi,1} B_{\xi,1} - C_{\xi,1}^2} = +\infty$. This implies that $G_{\xi,1}^N(\hat{\xi}_0) = +\infty$. Plugging this in (21) yields

$$\hat{\xi}_N = \min(U_N, U_{N-1} + \lambda_\xi \sigma^2, \dots, U_1 + (N-1)\lambda_\xi \sigma^2).$$

Similarly, the estimate $\hat{\psi}_N$ is given by

$$\hat{\psi}_N = \min(V_N, V_{N-1} + \lambda_\psi \sigma^2, \dots, V_1 + (N-1)\lambda_\psi \sigma^2)$$

and the estimate $\hat{\theta}_N$ can be obtained using (22) as

$$\begin{aligned} \hat{\theta}_N = \frac{1}{2} \min(U_N, U_{N-1} + \lambda_\xi \sigma^2, U_{N-2} + 2\lambda_\xi \sigma^2, \\ \dots, U_1 + (N-1)\lambda_\xi \sigma^2) - \\ \frac{1}{2} \min(V_N, V_{N-1} + \lambda_\psi \sigma^2, V_{N-2} + 2\lambda_\psi \sigma^2, \\ \dots, V_1 + (N-1)\lambda_\psi \sigma^2). \end{aligned} \quad (23)$$

As the Gauss-Markov system noise $\sigma^2 \rightarrow 0$, (23) yields

$$\hat{\theta}_N \rightarrow \hat{\theta}_{ML} = \frac{\min(U_N, \dots, U_1) - \min(V_N, \dots, V_1)}{2} \quad (24)$$

which is the ML estimator proposed in [6].

4. SIMULATION RESULTS

With $\lambda_\xi = \lambda_\psi = 10$ and $\sigma = 10^{-2}$, Fig. 2 shows the MSE performance of $\hat{\theta}_N$ and $\hat{\theta}_{ML}$, compared with the Bayesian Chapman-Robbins bound (BCHRb). It is clear that $\hat{\theta}_N$ exhibits a better performance than $\hat{\theta}_{ML}$ by incorporating the effects of time variations in clock offset. As the variance of the Gauss-Markov model accumulates with the addition of more samples, the MSE of $\hat{\theta}_{ML}$ gets worse. Fig. 3 depicts the MSE of θ_N in (23) with $N = 25$. The horizontal line represents the MSE of the ML estimator (24). It can be observed that the MSE obtained by using the FGE for estimating θ approaches the MSE of the ML as $\sigma < 10^{-3}$.

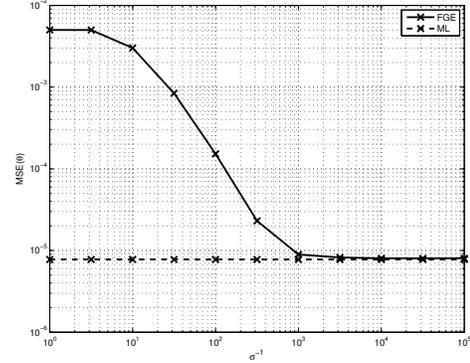


Fig. 3. MSE in estimation of θ_N vs σ .

5. CONCLUSION

The estimation of a possibly time-varying clock offset is studied using factor graphs. A closed form solution to the clock offset estimation problem is presented using a novel message passing strategy based on the max-product algorithm. This estimator shows a performance superior to the ML estimator proposed in [6] by capturing the effects of time variations in the clock offset efficiently.

6. REFERENCES

- [1] I. F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci, "A survey on sensor networks," *IEEE Commun. Mag.*, vol. 40, no. 8, pp. 102-114, Aug. 2002.
- [2] B. Sadler and A. Swami, "Synchronization in sensor networks: An overview," in *Proc. IEEE Military Commun. Conf. (MILCOM 2006)*, pp. 1-6, Oct. 2006.
- [3] S. Ganeriwal, R. Kumar, and M.B. Srivastava, "Timing-sync protocol for sensor networks," in *Proc. SenSys*, Los Angeles, CA, pp. 138-149, Nov. 2003.
- [4] Y.-C. Wu, Q.M. Chaudhari, and E. Serpedin, "Clock synchronization of wireless sensor networks," *IEEE Signal Process. Mag.*, vol. 28, no. 1, pp. 124-138, Jan. 2011.
- [5] H. S. Abdel-Ghaffar, "Analysis of synchronization algorithm with time-out control over networks with exponentially symmetric delays," *IEEE Trans. Commun.*, vol. 50, no. 10, pp. 1652-1661, Oct. 2002.
- [6] D. R. Jeske, "On the maximum likelihood estimation of clock offset," *IEEE Trans. Commun.*, vol. 53, no. 1, pp. 53-54, Jan. 2005.
- [7] K.-L. Noh, Q. M. Chaudhari, E. Serpedin, and B. Suter, "Novel clock phase offset and skew estimation using two-way timing message exchanges for wireless sensor networks," *IEEE Trans. Commun.*, vol. 55, no. 4, pp. 766-777, Apr. 2007.