3D-2D Stokes-Darcy coupling for the modelling of seepage with an application to fluid-structure interaction with contact

Erik Burman*, Miguel A. Fernández†, Stefan Frei‡, and Fannie M. Gerosa†

Abstract

In this note we introduce a mixed dimensional Stokes-Darcy coupling where a d dimensional Stokes' flow is coupled to a Darcy model on the d-1 dimensional boundary of the domain. The porous layer introduces tangential creeping flow along the boundary and allows for the modelling of boundary flow due to surface roughness. This leads to a new model of flow in fracture networks with reservoirs in an impenetrable bulk matrix. Exploiting this modelling capability, we then formulate a fluid-structure interaction method with contact, where the porous layer allows for mechanically consistent contact and release. Physical seepage in the contact zone due to rough surfaces is modelled by the porous layer. Some numerical examples are reported, both on the Stokes'-Darcy coupling alone and on the fluid-structure interaction with contact in the porous boundary layer.

1 Introduction

In numerous environmental or biomedical applications there is a need to model the coupling between a flow in a reservoir and flow in a surrounding porous medium. This is particularly challenging if the porous medium is fractured and the bulk matrix has very low permeability. Typically the fractures are modelled as d-1 dimensional manifolds, embedded in a d dimensional porous bulk matrix. For the modelling of the fractured porous medium we refer to [3]. Observe however that if the bulk permeability is negligible the fluid in the reservoir can not penetrate into the fractures since the d-1 dimensional manifolds have an intersection of the reservoir boundary of d-1 measure zero. This means that such a model can not be used for the fluid flow between two

 $^{^\}star \mbox{Department}$ of Mathematics, University College London, London, UK–WC1E 6BT, United Kingdom

[†]Inria, 75012 Paris, Sorbonne Université & CNRS, UMR 7598 LJLL, 75005 Paris. [‡]Department of Mathematics & Statistics, University of Konstanz, Germany.

reservoirs connected by a fracture in an impenetrable medium. Here we propose to introduce a Darcy equation for the tangential flow on the boundary of the reservoir. Since this equation is set on a d-1 dimensional manifold it can provide an interface allowing for flow from the reservoir to the cracks. The flow on the boundary communicates with the flow in the cracks through continuity of pressure and conservation expressed by Kirchhoff's law. This gives a cheap and flexible model for flow in reservoirs connected by fractures.

Our original motivation for this model is the particular case of fluid structure interaction with contact where the situation described above occurs when two boundaries enter in contact provoking a change of topology of the fluid domain. It has recently been observed by several authors [1, 4] that the consistent modelling of fluid-structure interaction with contact requires a fluid model, in particular a pressure, also in the contact zone. Indeed, some seepage is expected to occur due to permeability of the contacting bodies or their surface roughness. Otherwise there is no continuous mechanism for the release of contact and non-physical voids can occur. For instance, it was argued in [1] that a consistent modelling of FSI with contact requires a complete modelling of the FSI-poroelastic coupling. Similar ideas were introduced in [4], but for computational reasons. Indeed, in the latter reference an elastic body immersed in a fluid enters in contact with a rigid wall and to allow for a consistent numerical modelling the permeability of the wall is relaxed. This motivates the introduction of an artificial porous medium whose permeability goes to zero with the mesh-size. Both approaches allow for the seepage that appears to be necessary for physical contact and release. However, in case the contacting solids are (modelled as) impenetrable, this seepage must be due to porous media flow in a thin layer in the contact zone due to surface roughness. The complete modelling of the poroelastic interaction of [1] or the bulk porous medium flow of [4] then appears artificial and unnecessarily expensive. For such situations the mixed dimensional modelling suggested above can offer an attractive compromise between model detail and computational cost.

In this note, we will focus exclusively on the modelling aspect. The coupled Stokes-Darcy model is introduced in section 2. Then, in section 3, we show how the ideas of [4] can be used to model FSI with contact together with the mixed-dimensional fluid system. Finally, we illustrate the two model situations numerically in section 4. First, the Stokes'-Darcy reservoir coupling (section 4.1) and then the full FSI with contact (section 4.2). In the latter case, we also give comparisons with the results from [4]. The numerical analysis of the resulting methods will be the subject of future work.

2 The coupled Stokes-Darcy system

We consider the coupling of a Darcy system in a thin-walled domain $\Omega_l = \Sigma_l \times \left(-\frac{\epsilon}{2}, \frac{\epsilon}{2}\right) \in \mathbb{R}^d$ for d = 2, 3 with a Stokes equation in the bulk domain Ω_f .

The Darcy problem on Ω_l writes

$$\begin{cases} u_l + K \nabla p_l = 0 \\ \nabla \cdot u_l = 0 \end{cases} \quad \text{in} \quad \Omega_l, \tag{1}$$

where u_l denotes the Darcy velocity, p_l the Darcy pressure and K is a $d \times d$ matrix that allows for the decomposition

$$K\nabla p_l = K_{\tau}\nabla_{\tau}p_l + K_n\partial_n p_l.$$

We denote the upper boundary of Ω_l which couples to Ω_f by γ_f and the outer boundary by γ_o . The normal vector n of the middle surface Σ_l of Ω_l is chosen in such a way that it points towards γ_o .

By averaging across the thickness ϵ , Martin, Jaffré and Roberts derived in [3] an effective equation for the averaged pressure across the thickness

$$P_l := \frac{1}{\epsilon} \int_{-\frac{\epsilon}{2}}^{\frac{\epsilon}{2}} p_l.$$

Under the modelling assumption that the average pressure is equal to the mean of the pressures on the upper and lower boundary

$$P_l = \frac{1}{2} (p_l | \gamma_f + p_l | \gamma_o) \quad \text{in} \quad \Sigma_l,$$
 (2)

the authors derived the system

$$\begin{cases}
-\nabla_{\tau} \cdot (\epsilon K_{\tau} \nabla_{\tau} P_{l}) = u_{l,n} | \gamma_{f} - u_{l,n} | \gamma_{o} \\
p_{l} | \gamma_{f} = P_{l} + \frac{\epsilon K_{n}^{-1}}{4} \left(u_{l,n} | \gamma_{o} + u_{l,n} | \gamma_{f} \right)
\end{cases} \quad \text{in} \quad \Sigma_{l}. \tag{3}$$

Here, $u_{l,n} = u_l \cdot n$ denotes the normal component of the velocity and τ is a tangential vector of Σ_l . We will couple (3) to Stokes flow in Ω_f

$$\begin{cases} \rho_f \partial_t u_f - \nabla \cdot \sigma_f(u_f, p_f) = 0 \\ \nabla \cdot u_f = 0 \end{cases} \quad \text{in} \quad \Omega_f, \tag{4}$$

where u_f denotes the fluid velocity, p_f the pressure, $\rho^{\rm f}$ the fluid density,

$$\sigma_f(u_f, p_f) := \mu(\nabla u_f + \nabla u_f^T) - p_f I,$$

the fluid Cauchy stress tensor and μ the dynamic viscosity. We assume that the coupling to the Darcy system (1) on γ_f takes place via the interface conditions

$$\begin{cases}
\sigma_{f,nn} = -p_l \\
\tau^T \sigma_f n = 0 & \text{on } \gamma_f, \\
u_{f,n} = u_{l,n}
\end{cases}$$
(5)

where $\sigma_f = \nabla u_f - p_f I$ and $\sigma_{f,nn} = n^T \sigma_f n$. In the lower porous wall γ_o we assume for simplicity that $u_{l,n} = 0$. Then, the relations (3) can be written as

$$\begin{cases}
-\nabla_{\tau} \cdot (\epsilon K_{\tau} \nabla_{\tau} P_{l}) = u_{f,n} \\
\sigma_{f,nn} = -P_{l} - \frac{\epsilon K_{n}^{-1}}{4} u_{f,n}
\end{cases} \quad \text{in} \quad \Sigma_{l}.$$

Note that the only remaining porous medium variable is the averaged pressure P_l . In the limit of permeability $K_n \to 0$, the system converges to a pure Stokes system with slip conditions on γ_f with an extension of the fluid forces into the porous medium pressure P_l .

We have the following coupled variational problem for (u_f, p_f, P_l) :

$$\begin{cases}
\rho_f(\partial_t u_f, v_f)_{\Omega_f} + (\sigma_f(u_f, p_f), \nabla v_f)_{\Omega_f} + (q_f, \nabla \cdot u_f)_{\Omega_f} \\
+ (P_l, v_{f,n})_{\Sigma_l} + \frac{\epsilon K_n^{-1}}{4} (u_{f,n}, v_{f,n})_{\Sigma_l} = 0, \\
(\epsilon K_\tau \nabla_\tau P_l, \nabla_\tau q_l)_{\Sigma_l} - (u_{f,n}, q_l)_{\Sigma_l} = 0,
\end{cases}$$
(6)

for all v_f, q_f, q_l , where $n = n_f$ is the outer normal of the fluid domain Ω_f .

3 The fluid-structure-poroelastic-contact interaction system

Now, we consider a fluid-structure-contact interaction system with a thin porous layer on the part of the exterior boundary, where contact might take place. The moving boundary of the solid is denoted by $\Sigma(t)$ and the porous layer by Σ_l . In absence of contact, we have the following system of equations

$$\begin{cases}
\rho_f \partial_t u_f - \nabla \cdot \sigma_f(u_f, p_f) = 0 \\
\nabla \cdot u_f = 0
\end{cases} \text{ in } \Omega_f(t),$$

$$\rho_s \partial_t \dot{d} - \nabla \cdot \sigma_s(d) = 0 \text{ in } \Omega_s(t),$$

$$u_f = \dot{d}, \quad \sigma_s n = \sigma_f n \text{ in } \Sigma(t),$$

$$\begin{cases}
-\nabla_\tau \cdot (\epsilon K_\tau \nabla_\tau P_l) = u_{l,n}|_{\gamma_f} \\
\sigma_{f,nn} = \underbrace{-P_l - \frac{\epsilon K_n^{-1}}{4} u_{l,n}|_{\gamma_f}}_{\sigma_p} \text{ in } \Sigma_l,
\end{cases}$$

$$(7)$$

where, in addition to the quantities introduced above, ρ_s denotes the solid density, d stands for the solid displacement and σ_s denotes the tensor of linear elasticity

$$\sigma_s = \frac{\lambda_s}{2} \left(\nabla d + \nabla d^T \right) + \frac{\mu_s}{2} \operatorname{tr} \left(\nabla d + \nabla d^T \right).$$

In addition, we impose that the solid Ω_s can not penetrate into the porous medium Σ_l

$$d_n - g \le 0, \quad \lambda \le 0, \quad \lambda(d_n - g) = 0 \quad \text{on } \Sigma(t).$$
 (8)

Here, g denotes the gap function to Σ_l and λ is a Lagrange multiplier for the no-penetration condition defined by

$$\lambda = \sigma_{s,nn} - \sigma_{f,nn} \qquad \text{on } \Sigma(t) \setminus \Sigma_l,$$

$$\lambda = \sigma_{s,nn} - \sigma_p \qquad \text{on } \Sigma(t) \cap \Sigma_l.$$

The "switch" on the right-hand side occurs, as the solid on one side of $\Sigma(t)$ couples either to the fluid Ω_f or the porous medium Σ_l on the other side of $\Sigma(t)$. The conditions (8) can equivalently be written as

$$\lambda = \gamma_C \left[\underbrace{d_n - g - \gamma_C^{-1} \lambda}_{P_{\gamma}}\right]_+ \quad \text{on } \Sigma(t)$$

for arbitrary $\gamma_C>0.$ Using this notation, we can characterise the zone of "active" contact as follows

$$\Sigma_c(t) = \left\{ x \in \Sigma_{\ell}(t) \,|\, P_{\gamma} > 0 \right\}.$$

To summarise, we have the following interface conditions:

• Contact condition on $\Sigma(t)$:

$$d_n - g \le 0$$
, $\lambda \le 0$, $\lambda(d_n - g) = 0$ on $\Sigma(t)$.

• Kinematic coupling on $\Sigma_{fsi}(t) = \Sigma(t) \backslash \Sigma_l$

$$u_f = \dot{d}$$
 on $\Sigma_{fsi}(t)$.

• Dynamic coupling on $\Sigma(t)$:

$$\sigma_s n = \lambda n - \sigma_p n = \gamma_C [P_\gamma]_+ n - \sigma_p n \quad \text{on } \Sigma(t) \cap \Sigma_l,$$

$$\sigma_s n = \lambda n - \sigma_f n = \gamma_C [P_\gamma]_+ n - \sigma_f n \quad \text{on } \Sigma(t) \setminus \Sigma_l.$$

We have the following Nitsche-based variational formulation: Find $u_f \in \mathcal{V}_f, p_f \in \mathcal{L}_f, d \in \mathcal{V}_s, P_l \in \mathcal{V}_l$ such that

$$(\partial_{t}u_{f}, v)_{\Omega_{f}} + (\partial_{t}\dot{d}, w)_{\Omega_{s}} + a_{f}(u_{f}, p_{f}; v, q) + a_{s}(d, w)$$

$$- (\sigma_{f}n, v - w)_{\Sigma(t)\backslash\Sigma_{l}} - (u_{f} - \dot{d}, \sigma_{f}(v, -q))_{\Sigma(t)\backslash\Sigma_{l}} + \frac{\gamma_{fsi}}{h}(u_{f} - \dot{d}, v - w)_{\Sigma(t)\backslash\Sigma_{l}}$$

$$- (\sigma_{p}, v \cdot n)_{\Sigma_{l}\backslash\Sigma(t)} - (\sigma_{p}, w \cdot n)_{\Sigma_{l}\cap\Sigma(t)} + ([P_{\gamma}]_{+}, w \cdot n)_{\Sigma(t)}$$

$$+ (\epsilon K_{\tau}\nabla_{\tau}P_{l}, \nabla_{\tau}q_{l})_{\Sigma_{l}} - (u_{f,n}, q_{l})_{\Sigma_{l}\backslash\Sigma(t)} - (\dot{d}_{n}, q_{l})_{\Sigma_{l}\cap\Sigma(t)} = 0$$

$$\forall v \in \mathcal{V}_{f}, q \in \mathcal{L}_{f}, w \in \mathcal{V}_{s}, q_{l} \in \mathcal{V}_{l}.$$

The porous stress σ_p is given by

$$\sigma_p = -P_l + \frac{\epsilon K_n^{-1}}{4} u_{l,n}|_{\gamma_f} = \begin{cases} -P_l + \frac{\epsilon K_n^{-1}}{4} u_{f,n} & \text{on } \Sigma_l \setminus \Sigma(t) \\ -P_l + \frac{\epsilon K_n^{-1}}{4} \dot{d}_n & \text{on } \Sigma_l \cap \Sigma(t). \end{cases}$$
(9)

4 Numerical experiments

Here we will report on some numerical experiments using the above models. First we consider the mixed dimensional Stokes'-Darcy system and then the fluid-structure interaction system with contact and porous layer in the contact zone.

4.1 Stokes-Darcy example

In this example, we consider two disconnected fluid reservoirs, the domain Ω_f , connected through a thin-walled porous media located on the bottom wall Σ_l , as

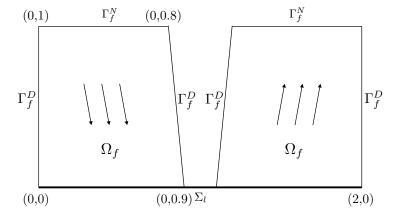


Figure 1: Geometrical configuration for the Stokes model with a thin-walled porous medium on the bottom wall.

shown in Figure 1. The physical parameters are $\mu=0.03$, $\rho_f=1$, $\epsilon=0.01$ and $K_\tau=K_n=1$. We impose a pressure drop across the two parts of the boundary Γ_f^N . The purpose of this example is to illustrate how the porous model is able to connect the fluid flow between the two containers. This can be clearly inferred from the results reported in Figure 2, which respectively show a snapshot of the fluid velocity, the elevation of the fluid pressure and the associated porous pressure.

4.2 Fluid-structure interaction with contact

To test the FSI-contact model, we consider flow in a 2-dimensional pipe, where the upper wall is elastic, see Figure 3. Due to the application of a large pressure

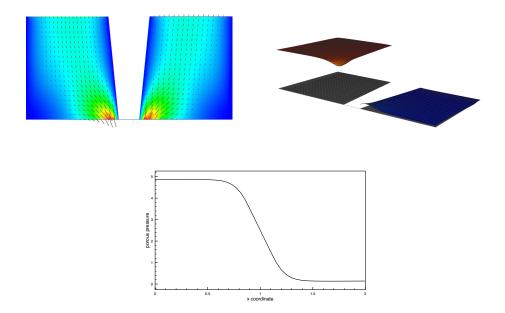


Figure 2: Top left: Snapshot of the fluid velocity. Top right: Elevation of the fluid pressure. Bottom: Porous pressure.

 \overline{P} on the left and right boundary, the upper wall is deflected downwards until it reaches the bottom. Note that when contact occurs, the configuration is topologically equivalent to the situation in section 4.1. Shortly before the time of impact we set \overline{P} to zero, such that contact is realeased again after a certain time. This model problem is taken from [4], where further details on the configuration and the discretisation can be found. To deal with the topology change in the fluid domain at the impact, we apply a *Fully Eulerian* approach for the FSI problem [2]. In order to obtain a continuous and physically relevant transition from FSI to solid-solid contact, we use the FSI-contact model derived in section 3 and place a thin porous domain Σ_l on the lower boundary.

In Figure 4 we compare this model for different parameters $K = K_{\tau} = K_n$ and ϵ with the approaches for FSI-contact problems introduced in [4] in terms of the minimal distance of the solid to Σ_p over time. In [4] two approaches were presented in order to extend the fluid stresses to the contact region during solid-solid contact, namely a so-called relaxed and an artificial fluid approach. It was observed that for the artificial fluid approach contact happens earlier, as penetration of the fluid flow into the artificial region is prevented only asymptotically, i.e. $u_{f,n} \to 0 \ (h \to 0)$ on Σ_p , in contrast to $u_{f,n} = 0$ for the relaxed approach. In the model presented here, we have similarly from (7) and $u_{l,n} = u_{f,n}$ on Σ_p

$$u_{f,n} = -\nabla_{\tau} \cdot (\epsilon K_{\tau} \partial_{\tau} P_l) \to 0 \quad (\epsilon K_{\tau} \to 0).$$

For this reason we observe in Figure 4 that the impact happens earlier for a

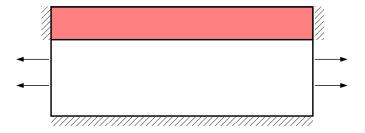


Figure 3: Geometrical configuration for the FSI-contact model. We apply a porous medium model on the (rigid) lower wall, where contact might take place.

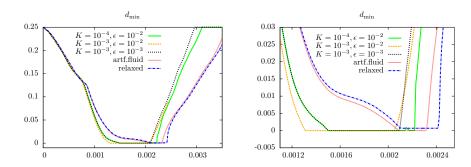


Figure 4: Minimal distance of Ω_s to the lower wall Σ_p over time. Right: zoom-in around the contact interval. We compare the new approach presented in Section 3 for different parameters with the *artificial fluid* and the *relaxed* contact approach studied in [4].

larger value of ϵK_{τ} . The time of the release seems to depend also on ϵK_n^{-1} , which appears in the definition of σ_p (9). A detailed investigation of this dependence and the investigation of stability and convergence of the numerical method are subject to future work.

Acknowledgments

Erik Burman was partially supported by the EPSRC grant: EP/P01576X/1. Stefan Frei acknowledges support by the DFG Research Scholarship FR3935/1-1

References

[1] C Ager, B Schott, AT Vuong, A Popp, and WA Wall. A consistent approach for fluid-structure-contact interaction based on a porous flow model for rough

- surface contact. Int J Numer Methods Eng, 119(13):1345-1378, 2019.
- [2] S Frei. Eulerian finite element methods for interface problems and fluid-structure interactions. PhD thesis, Heidelberg University, 2016. http://www.ub.uni-heidelberg.de/archiv/21590.
- [3] V Martin, J Jaffré, and JE Roberts. Modeling fractures and barriers as interfaces for flow in porous media. SIAM J. Sci. Comput., 26(5):1667–1691, 2005.
- [4] E Burman S Frei and MA Fernández. Nitsche-based formulation for fluid-structure interactions with contact. ESAIM: M2AN (published online). https://doi.org/10.1051/m2an/2019072.