RoboCast: Asynchronous Communication in Robot Networks

Zohir Bouzid^{1*}, Shlomi Dolev^{2**}, Maria Potop-Butucaru¹, and Sébastien Tixeuil¹

¹ Université Pierre et Marie Curie - Paris 6, France ² Ben Gurion University of the Negev, Israel

Abstract. This paper introduces the *RoboCast* communication abstraction. The RoboCast allows a swarm of non oblivious, anonymous robots that are only endowed with visibility sensors and do not share a common coordinate system, to asynchronously exchange information. We propose a generic framework that covers a large class of asynchronous communication algorithms and show how our framework can be used to implement fundamental building blocks in robot networks such as gathering or stigmergy. In more details, we propose a RoboCast algorithm that allows robots to broadcast their local coordinate systems to each others. Our algorithm is further refined with a local collision avoidance scheme. Then, using the RoboCast primitive, we propose algorithms for deterministic asynchronous gathering and binary information exchange.

1 Introduction

Existing studies in robots networks focus on characterizing the computational power of these systems when robots are endowed with visibility sensors and communicate using *only* their movements without relying on any sort of agreement on a global coordinate system. Most of these studies [1, 5, 4] assume oblivious robots (*i.e.* robots have no persistent memory of their past actions), so the "memory" of the network is implicit and generally deduced from the current positions of the robots. Two computation models are commonly used in robot networks: ATOM [9] and CORDA [7]. In both models robots perform in Look-Compute-Move cycles. The main difference is that these cycles are executed in a fully asynchronous manner in the CORDA model while each phase of the Look-Compute-Move cycle is executed in a lock step fashion in the ATOM model. These computation models have already proved their limitations. That is, the

^{*} Supported by DIGITEO project PACTOLE and the ANR projects R-DISCOVER and SHAMAN.

^{**} Part of the research was done during a supported visit of Shlomi Dolev at LIP6 Universit Pierre et Marie Curie - Paris 6. Partially supported by Rita Altura trust chair in computer sciences, ICT Programme of the European Union under contract number FP7-215270 (FRONTS), and US Air Force European Office of Aerospace Research and Development, grant number FA8655-09-1-3016.

deterministic implementations of many fundamental abstractions such as gathering or leader election are proved impossible in these settings without additional assumptions ([8,3]). The purpose of this paper is to study how the addition of *bounded* memory to each individual robot can increase the computational power of an *asynchronous* swarm of robots. We focus on an *all-to-all* communication primitive, called RoboCast, which is a basic building block for the design of any distributed system. A positive answer to this problem is the open gate for solving fundamental problems for robot networks such as gathering, scattering, election or exploration.

In robot networks, using motion to transmit information is not new [9, 10,6]. In [9], Suzuki and Yamashita present an algorithm for broadcasting the local coordinate system of each robot (and thus build a common coordinate system) under the ATOM model. The algorithm heavily relies on the phase atomicity in each Look-Compute-Move cycle. In particular, a robot a that observes another robot b in four distinct positions has the certitude that b has in turn already seen a in at least two different positions. The situation becomes more intricate in the asynchronous CORDA model. Indeed, the number of different positions observed for a given robot is not an indicator on the number of complete cycles executed by that robot since cycles are completely uncorrelated. By contrast, our implementation of RoboCast is designed for the more general CORDA model and uses a novel strategy: the focus moves from observing robots in different positions to observing robots moving in different *directions*. That is, each robot changes its direction of movement when a particular stage of the algorithm is completed; this change allows the other robots to infer information about the observed robot.

Another non trivial issue that needs to be taken care of without explicit communication is *collisions avoidance*, since colliding robots could be confused due to indistinguishability. Moreover, robots may physically collide during their Move phase. One of the techniques commonly used to avoid collisions consists in computing a Voronoi diagram [2] and allowing robots to move *only* inside their Voronoi cells [5]. Since the Voronoi cells do not overlap with one another, robots are guaranteed to not collide. This simple technique works well in the ATOM model but heavily relies on the computation of the same Voronoi diagram by the robots that are activated concurrently, and thus does not extend to the CORDA model where different Voronoi diagrams may be computed by different robots, inducing possible collisions. Our approach defines a collision-free zone of movement that is compatible with the CORDA model constraints.

Applications of our RoboCast communication primitive include fundamental services in robot networks such as gathering and stigmergy. Deterministic gathering of two stateless robots has already been proved impossible when robots have no common orientation [9]. In [9], the authors also propose non-oblivious solutions for deterministic gathering in the ATOM model. Our RoboCast permits to extend this result to the CORDA model, using bounded memory and a limited number of movements. Recently, in [6], the authors extend the work of [9] to efficiently implement stigmergy in robot networks in the ATOM model. Stigmergy is the ability for robots to exchange binary information that is encoded in the way they move. This scheme is particularly appealing for secure communication in robot networks, since *e.g.* jamming has no impact on robot communication capability. The RoboCast primitive allows to extend this mechanism to the CORDA model, with a collision-free stigmergy scheme.

Our contribution We formally specify a robot network communication primitive, called RoboCast, and propose implementation variants for this primitive, that permit anonymous robots not agreeing on a common coordinate system, to exchange various information (e.g. their local coordinate axes, unity of measure, rendez-vous points, or binary information) using only motion in a two dimensional space. Contrary to previous solutions, our protocols all perform in the fully asynchronous CORDA model, use constant memory and a bounded number of movements. Then, we use the RoboCast primitive to efficiently solve some fundamental open problems in robot networks. We present a fully asynchronous deterministic gathering and a fully asynchronous stimergic communication scheme. Our algorithms differ from previous works by several key features: they are totally asynchronous (in particular they do not rely on the atomicity of cycles executed by robots), they make no assumption on a common chirality or knowledge of the initial positions of robots, and finally, each algorithm uses only a bounded number of movements. Also, for the first time in these settings, our protocols use CORDA-compliant collision avoidance schemes.

Roadmap The paper is made up of six sections. Section 2 describes the computing model and presents the formal specification of the RoboCast problem. Section 3 presents our protocol and its complexity. The algorithm is enhanced in Section 4 with a collision-avoidance scheme. Using the Robocast primitive, Section 5 proposes algorithms for deterministic asynchronous gathering and binary information exchange. Finally, Section 6 provides concluding remarks. Some proofs are relegated to the appendix.

2 Model

We consider a network that consists of a finite set of n robots arbitrarily deployed in a two dimensional space, with no two robots located at the same position. Robots are devices with sensing, computing and moving capabilities. They can observe (sense) the positions of other robots in the space and based on these observations, they perform some local computations that can drive them to other locations.

In the context of this paper, the robots are *anonymous*, in the sense that they can not be distinguished using their appearance and they do not have any kind of identifiers that can be used during the computation. In addition, there is no direct mean of communication between them. Hence, the only way for robots to acquire information is by observing their positions. Robots have *unlimited visibility*, *i.e.* they are able to sense the entire set of robots. We assume that robots are

non-oblivious, i.e. they can remember observations, computations and motions performed in previous steps. Each robot is endowed with a local coordinate system and a local unit measure which may be different from those of other robots. This local coordinate system is assumed to be fixed during a run unless it is explicitly modified by the corresponding robot as a result of a computation. We say in this case that robots *remember* their own coordinate systems. This is a common assumption when studying non-oblivious robot networks [9, 6].

A protocol is a collection of n programs, one operating on each robot. The program of a robot consists in executing Look-Compute-Move cycles infinitely many times. That is, the robot first observes its environment (Look phase). An observation returns a snapshot of the positions of all robots within the visibility range. In our case, this observation returns a snapshot of the positions of all robots. The observed positions are relative to the observing robot, that is, they use the coordinate system of the observing robot. Based on its observation, a robot then decides — according to its program — to move or to stay idle (Compute phase). When a robot decides a move, it moves to its destination during the Move phase.

The local state of a robot is defined by the content of its memory and its position. A configuration of the system is the union of the local states of all the robots in the system. An execution $e = (c_0, \ldots, c_t, \ldots)$ of the system is an infinite sequence of configurations, where c_0 is the initial configuration of the system, and every transition $c_i \rightarrow c_{i+1}$ is associated to the execution of a non empty subset of *actions*. The granularity (or atomicity) of those actions is model-dependent and is defined in the sequel of this section.

A scheduler is a predicate on computations, that is, a scheduler defines a set of admissible computations, such that every computation in this set satisfies the scheduler predicate. A scheduler can be seen as an entity that is external to the system and selects robots for execution. As more power is given to the scheduler for robot scheduling, more different executions are possible and more difficult it becomes to design robot algorithms. In the remainder of the paper, we consider that the scheduler is fair and fully asynchronous, that is, in any infinite execution, every robot is activated infinitely often, but there is no bound on the ratio between the most activated robot and the least activated one. In each cycle, the scheduler determines the distance to which each robot can move in this cycle, that is, it can stop a robot before it reaches its computed destination. However, a robot r_i is guaranteed to be able to move a distance of at least δ_i towards its destination before it can be stopped by the scheduler.

We now review the main differences between the ATOM [9] and CORDA [7] models. In the ATOM model, whenever a robot is activated by the scheduler, it performs a *full* computation cycle. Thus, the execution of the system can be viewed as an infinite sequence of rounds. In a round one or more robots are activated by the scheduler and perform a computation cycle. The *fully-synchronous* ATOM model refers to the fact that the scheduler activates all robots in each round, while the regular ATOM model enables the scheduler to activate only a subset of the robots. In the CORDA model, robots may be interrupted by

the scheduler after performing only a portion of a computation cycle. In particular, phases (Look, Compute, Move) of different robots may be interleaved. For example, a robot a may perform a Look phase, then a robot b performs a Look-Compute-Move complete cycle, then a computes and moves based on its previous observation (that does not correspond to the current configuration anymore). As a result, the set of executions that are possible in the CORDA model are a strict superset of those that are possible in the ATOM model. So, an impossibility result that holds in the ATOM model also holds in the CORDA model, while an algorithm that performs in the CORDA model is also correct in the ATOM model. Note that the converse is not necessarily true.

The RoboCast Problem The RoboCast communication abstraction provides a set of robots located at arbitrary positions in a two-dimensional space the possibility to broadcast their local information to each other. The RoboCast abstraction offers robots two communication primitives: RoboCast(M) sends Message M to all other robots, and Deliver(M) delivers Message M to the local robot. The message may consists in the local coordinate system, the robot chirality, the unit of measure, or any binary coded information.

Consider a run at which each robot r_i in the system invokes $RoboCast(m_i)$ at some time t_i for some message m_i . Let t be equal to $max\{t_1, \ldots, t_n\}$. Any protocol solving the RoboCast Problem has to satisfy the following two properties:

Validity: For each message m_i , there exists a time $t'_i > t$ after which every robot in the system has performed $Deliver(m_i)$.

Termination: There exists a time $t_T \ge max\{t'_1, \ldots, t'_n\}$ after which no robot performs a movement that causally depends on the invocations of $RoboCast(m_i)$.

3 Local Coordinate System RoboCast

In this section we present algorithms for robocasting the local coordinate system. For ease of presentation we first propose an algorithm for two-robots then the general version for systems with n robots.

The local coordinate system is defined by two axes (abscissa and ordinate), their positive directions and the unity of measure. In order to robocast this information we use a modular approach. That is, robots invoke first the robocast primitive (*LineRbcast1* hereafter) to broadcast a line representing their abscissa. Then, using a parametrized module (*LineRbcast2*), they robocast three successive lines encoding respectively their ordinate, unit of measure and the positive direction of axes. This invocation chain is motivated by the dependence between the transmitted lines. When a node broadcasts a line, without any additional knowledge, two different points have to be sent in order to uniquely identify the line at the destination. However, in the case of a coordinate system, only for the first transmitted axis nodes need to identify the two points. The transmission of the subsequent axes needs the knowledge of a unique additional point.

3.1 Line RoboCast

In robot networks the broadcast of axes is not a new issue. Starting with their seminal paper [9], Suzuki and Yamashita presented an algorithm for broadcasting the axes via motion that works in the ATOM model. Their algorithm heavily relies on the atomicity of cycles and the observation focus on the different positions of the other robots during their Move phase.

This type of observation is totally useless in asynchronous CORDA model. In this model, when a robot r moves towards its destination, another robot r' can be activated k > 1 times with k arbitrarily large, and thus observe r in k different positions without having any clue on the number of complete cycles executed by r. In other words, the number of different positions observed for a given robot is not an indicator on the number of complete executed cycles since in CORDA cycles are completely uncorrelated.

Our solution uses a novel strategy. That is, the focus moves from observing robots in different positions to observing their change of direction: each robot changes its direction of movement when a particular stage of the algorithm is completed; this change allows the other robots to infer information about the observed robot.

Line RoboCast Detailed Description Let r_0 and r_1 be the two robots in the system. In the sequel, when we refer to one of these robots without specifying which, we denote it by r_i and its peer by r_{1-i} . In this case, the operations on the indices of robots are performed modulo 2. For ease of presentation we assume that initially each robot r_i translates and rotates its local coordinate system such that its x-axis and origin coincide with the line to be broacast and its current location respectively. We assume also that each robot is initially located in the origin of its local coordinate system.

At the end of the execution, each robot must have broadcast its own line and have received the line of its peer. A robot "receives" the line broadcast by its peer when it knows at least two distinct positions of this line. Thus, to send its line, each robot must move along it (following a scheme that will be specified later) until it is sure that it has been observed by the other robot.

The algorithm idea is simple: each robot broadcasts its line by moving along it in a certain direction (considered to be positive). Simultaneously, it observes the different positions occupied by its peer r_{1-i} . Once r_i has observed r_{1-i} in two distinct positions, it informs it that it has received its line by changing its direction of movement, that is, by moving along its line in the reverse direction (the negative direction if the first movement have been performed in the positive direction of the line). This change of direction is an acknowledgement for the reception of the peer line. A robot finishes the algorithm once it changed its direction. This means that both robots have sent their line and received the other's line.

The algorithm is described in detail as Algorithm 1. Due to space limitations, its proof is given in the Appendix. Each robot performs four stages referred in Algorithm 1 as states:

- state S_1 : This is the initial state of the algorithm. At this state, the robot r_i stores the position of its peer in the variable pos_1 and heads towards the position (1.0) of its local coordinate system. That is, it moves along its line in the positive direction. Note that r_i stays only one cycle in this state and then goes to state S_2 .
- state S_2 : A this point, r_i knows only one point of its peer line (recorded in pos_1). To be able to compute the whole peer line, r_i must observe r_{1-i} in another (distinct) position of this line. Hence, each time it is activated, r_i checks if r_{1-i} is still located in pos_1 or if it has already changed its position. In the first case (line 2.*a* of the code), it makes no movement by selecting its current position as its destination. Otherwise (line 2.*b*), it saves the new position of r_{1-i} in pos_2 and delivers the line formed by pos_1 and pos_2 . Then, it initiates a change of direction by moving towards the point (-1.0) of its local coordinate system, and moves to state S_3 .
- state S_3 : at this point r_i knows the line of its peer locally derived from pos_1 and pos_2 . Before finishing the algorithm, r_i must be sure that also r_{1-i} knows its line. Therefore, it observes r_{1-i} until it detects a change of direction (the condition of line 3.a). If this is not the case and if r_i is still in the positive part of its x-axis, then it goes to the position (-1,0) of its local coordinate system (line 3.b). Otherwise (if r_i is already in the negative part of its xaxis), it performs a null movement (line 3.c). When r_i is in state S_3 one is sure, as we shall show later, that r_{1-i} knows at least one position of l_i , say p. Recall that l_i corresponds to the x-axis of r_i . It turns out that p is located in the positive part of this axis. In moving towards the negative part of its x-axis, r_i is sure that it will eventually be observed by r_{1-i} in a position distinct from p which allows r_{1-i} to compute l_i .
- state S_4 : At this stage, both r_i and r_{1-i} received the line sent by each others. That is, r_i has already changed its own direction of movement, and observed that r_{1-i} also changed its direction. But nothing guarantees that at this step r_{1-i} knows that r_i changed its direction of movement. If r_i stops now, r_{1-i} may remain stuck forever (in state S_3). To announce the end of the algorithm to its peer, r_i heads towards a position located outside l_i , That is, it will move on a line $nextl_i$ (distinct from l_i) which is given as parameter to the algorithm. During the move from l_i to $nextl_i$, r_i should avoid points outside these lines. To this end, r_i must first pass through myIntersect which is the intersection of l_i and $nextl_i$ - before moving to a point located in $nextl_i$ but not on l_i (refer to lines 3.a.2, 3.a.3 and 4.a of the code).

Note that the robocast of a line is usually followed by the robocast of other information (e.g. other lines that encode the local coordinate system). To helps this process the end of the robocast of l_i should mark the beginning of the next line, $nextl_i$, robocast. Therefore, once r_i reaches myIntersect, r_i rotates its local coordinate system such that its x-axis matches now with $nextl_i$, and then it moves toward the point of (1,0) of its (new) local coordinate system. When r_{1-i} observes r_i in a position that is not on l_i , it learns that r_i knows that r_{1-i} learned l_{1-i} , and so it can go to state S_4 (lines 3.a.*) and finish the algorithm.

Algorithm 1 Line RoboCast LineRbcast1 for two robots: Algorithm for robot r_i

```
Variables:
state: initially S_1
pos_1, pos_2: initially \perp
destination, myIntersect: initially \perp
Actions
1. State [S1]: %Robot ri starts the algorithm%
                a. pos_1 \leftarrow observe(1-i)
b. destination \leftarrow (1,0)_i
                c. state \leftarrow S_2
d. Move to destination
2. State [S2]: %r; knows one position of l1-; %
                a. if (pos_1 = observe(1 - i)) then destination \leftarrow observe(i)
b. else
                                 3. Deliver (l_{1-i})
                                 4. destination \leftarrow (
                                                                   -1.0);
                                 5. state \leftarrow S_3 endif
                c. Move to destination
3. State [S<sub>3</sub>]: \%r_i knows the line robocast by robot r_{1-i}\%
                a. if (pos_2 \text{ is not inside the line segment } [pos_1, observe(1-i)]) then
               a. In (pos) is not must the line segment (pos), over left = i)

1. state \leftarrow S_4

2. myIntersect \leftarrow intersection(l_i, nextl_i)

3. destination \leftarrow myIntersect

b. else if (observe(i) \geq (0, 0)_i) then destination \leftarrow (0, -1)_i

c. else destination \leftarrow observe(i) endif endif

d. Move to destination
4. State [S4]: \%r_i knows that robot r_{1-i} knows its line l_i\%
                a. if (observe(i) \neq myIntersect) then destination \leftarrow myIntersect
                b. else
                               1. r_i rotates its coordinate system such that its x-axis and the origin match with nextl_i and myIntersect respectively.
2. destination \leftarrow (1, 0)_i; return endif
                c. Move to destination
```

3.2 Line RoboCast: a Composable Version

Line RoboCast primitive is usually used as a building block for achieving more complex tasks. For example, the RoboCast of the local coordinate system requires the transmission of four successive lines representing respectively the abscissa, the ordinate, the value of the unit measure and a forth line to determine the positive direction of axes. In stigmergic communication a robot has to transmit at least a line for each binary information it wants to send. In all these examples, the transmitted lines are dependent one of each other and therefore their successive transmission can be accelerated by directly exploiting this dependence. Indeed, the knowledge of a unique point (instead of two) is sufficient for the receiver to infer the sent line. In the following we propose modifications of the Line RoboCast primitive in order to exploit contextual information that are encoded in a set of predicates that will be detailed in the sequel.

In the case of the local coordinate system, the additional information the transmission can exploit is the fact that the abscissa is perpendicular to the ordinate. Once the abscissa is transmitted, it suffices for a robot to simply send a single position of its ordinate, say *pos1*. The other robots can then calculate the ordinate by finding the line that passes through *pos1* and which is perpendicular

to the previously received abscissa. In the modified version of the Line RoboCast algorithm the predicate *isPerpendicular* encodes this condition.

For the case of stigmergy, a robot transmits a binary information by robocasting a line whose angle to the abscissa encodes this information. The lines transmitted successively by a single robot are not perpendicular to each others. However, all these lines pass through the origin of the coordinate system of the sending robot. In this case, it suffices to transmit only one position located on this line as long as it is distinct from the origin. We say in this case that the line satisfies the predicate passThrOrigin.

A second change we propose relates to the asynchrony of the algorithm. In fact, even if robots execute in unison, they are not guaranteed to finish the execution of LineRbcast1 at the same time (by reaching S_4). A robot r_i can begin transmitting its k-th line l_i when its peer r_{1-i} is still located in its (k-1)th line $ancientl_{1-i}$ that r_i has already received. r_i should ignore the positions transmitted by r_{1-i} until it leaves $ancientl_{1-i}$ for a new line. It follows that to make the module composable, the old line that the peer has already received from its peer should be supplied as an argument $(ancientl_{1-i})$ to the function. Thus, it will not consider the positions occupied by r_{1-i} until the latter leaves $ancientl_{1-i}$.

In the following, we present the code of the new Line RoboCast function that we denote by *LineRbcast2*. Its description and its formal proof are omitted since they follow the same lines as those of *LineRbcast1*.

3.3 RoboCast of the Local Coordinate System

To robocast their two axes (abscissa and ordinate), robots call LineRbcast1 to robocast the abscissa, then LineRbcast2 to robocast the ordinate. The parameter $\neq myOrdinate$ of LineRbcast2 stands for the next line to be robocast and it can be set to any line different from myOrdinate. The next line to robocast (unitLine) is a line whose angle with the x-axis encodes the unit of measure. This angle will be determined during the execution LineRbcast2.

 $\begin{array}{ll} 1. \ peerAbscissa \leftarrow LineRbcast1(myAbscissa, myOrdinate)\\ 2. \ peerOrdinate \leftarrow \\ LineRbcast2(myOrdinate, \neq myOrdinate, peerAbscissa, isPerpendicular)\\ \end{array}$

After executing the above code, each robot knows the two axes of its peer coordinate system but not their positive directions neither their unit of measure. To robocast the unit of measure we use a technique similar to that used by [9]. The idea is simple: each robot measures the distance d_i between its origin and the peer's origin in terms of its local coordinate system. To announce the value of d_i to its peer, each robot robocast via LineRbcast2 a line, unitLine, which passes through its origin and whose angle with its abscissa is equal to $f(d_i)$ where for x > 0, $f(x) = (1/2x) \times 90^{\circ}$ is a monotonically increasing function with range $(0^{\circ}, 90^{\circ})$. The receiving robot r_{1-i} can then infer d_i from $f(d_i)$ and compute the unit measure of r_i which is equal to d_{1-i}/d_i . The choice of $(0^{\circ}, 90^{\circ})$ as a

Algorithm 2 Line RoboCast LineRbcast2 for two robots: Algorithm for robot r_i

Inputs: $\begin{array}{ll} \textbf{Inputs:} \\ l_i: \text{the line to robocast} \\ nextl_i: \text{the next line to robocast after } l_i \\ precedentl_{1-i}: \text{the line robocast precedently by } r_{1-i} \\ predicate: a predicate on the output l_{1-i}, \text{ for example } is Perpendicular \text{ and } passThrOrigin.} \end{array}$ Outputs: l_{1-i} : the line robocast by r_{1-i} Variables state: initially S_1 pos_1 : initially \perp $destination, myIntersect, peerIntersect: initially <math>\perp$ Actions: 1. State [S₂]: $\%r_i$ starts robocasting its line $l_i\%$ a. if $(observe(1-i) \in precedentl_{1-i})$ then $destination \leftarrow observe(i)$ b. else 1. $pos3 \leftarrow observe(1-i)$ 2. $l_{1-i} \leftarrow$ the line that passes through pos3 and satisfies predicate3. Deliver (l_{1-i}) 4. peerIntersect \leftarrow intersection between l_{1-i} and $precedentl_{1-i}$ 5. destination $\leftarrow (0, -1)_i$ 6. state $\leftarrow S_3$ endif c. Move to destination State [S3]: %r_i knows the line robocast by robot r_{1-i}% a. if (pos3 is not inside the line segment [peerIntersect, observe(1 - i)]) then 1. state $\leftarrow S_4$ 2. myIntersect \leftarrow intersection $(l_i, nextl_i)$ 3. destination \leftarrow myIntersect b. else if $(observe(i) \ge (0, 0)_i)$ then $destination \leftarrow (0, -1)_i$ c. else $destination \leftarrow observe(i)$ endif endif d. Move to destination 3. State $[S_4]$: similar to state S_4 of the lineRbcast1 function

range for f(x) (instead of $(0^{\circ}, 360^{\circ})$) is motivated by the fact that the positive directions of the two axes are not yet known to the robots. It is thus impossible to distinguish between an angle α with $\alpha \in (0^{\circ}, 90^{\circ})$ and the angles $\Pi - \alpha, -\alpha$, and $\Pi + \alpha$. To overcome the ambiguity and to make f(x) injective, we restrict the range to $(0^{\circ}, 90^{\circ})$. In contrast, Suzuki and Yamashita [9] use a function f'(x)slightly different from ours: $(1/2x) \times 360^{\circ}$. That is, its range is equal to $(0^{\circ}, 360^{\circ})$. This is because in ATOM, robots can robocast at the same time the two axis and their positive directions, for example by restricting the movement of robots to only the positive part of their axes. Since the positive directions of the two axes are known, unitLine can be an oriented line whose angle f'(x) can take any value in $(0^{\circ}, 360^{\circ})$ without any possible ambiguity.

Positive directions of axes Once the two axes are known, determining their positive directions amounts to selecting the upper right quarter of the coordinate system that is positive for both x and y. Since the line used to robocast the unit of distance passes through two quarters (the upper right and the lower left), it remains to choose among these two travelled quarters which one corresponds to the upper right one. To do this, each robot robocast just after the line encoding the unit distance another line which is perpendicular to it such that their intersection lays inside the upper right quarter.

10

Generalization to n **robots** The generalization of the solution to the case of n > 2 robots has to use an additional mechanism to allow robots to "recognize" other robots and distinguish them from each others despite anonymity. Let us consider the case of three robots r_1, r_2, r_3 . When r_1 looks the second time, r_2 and r_3 could have moved (or be moving), each according to its local coordinate system and unit measure. At this point, even with memory of past observations, r_1 may be not able to distinguish between r_2 and r_3 in their new positions given the fact that robots are anonymous. Moreover, r_2 and r_3 could even switch places and appear not to have moved. Hence, the implementation of the primitive *observe(i)* is not trivial. For this, we use the collision avoidance techniques presented in the next section to instruct each robot to move only in the vicinity of its initial position. This way, other robots are able to recognize it by using its past positions. The technical details of this mechanism are given at the end of the next section.

Apart from this, the generalization of the protocol with n robots is trivial. We present its detailed description in the Appendix.

3.4 Motion Complexity Analysis

Now we show that the total number of robot moves in the coordinate system RoboCast is upper bounded. For the sake of presentation, we assume for now that the scheduler does not interrupt robots execution before they reach their planned destination. Each robot is initially located at the origin of its local coordinate system. To robocast each axis, a robot must visit two distinct positions: one located in the positive part of this axis and the other one located in its negative part. For example, to robocast its x-axis, a robot has first to move from its origin to the position $(1.0)_i$, then from $(1.0)_i$ to the $(-1,0)_i$. Then, before initiating a robocast for the other axis, the robot must first return back to its origin. Hence, at most 3 movements are needed to robocast each axis. This implies that to robocast the whole local coordinate system, at most 12 movements have to be performed by a particular robot.

In the general CORDA model, the scheduler is allowed to stop robots before they reach their destination, as long as a minimal distance of δ_i has been traversed. In this case, the number of necessary movements is equal to at most $8 * (1 + 1/\delta_i)$. This worst case is obtained when a robot is *not* stopped by the scheduler when moving from its origin towards another position (thus letting it go the farthest possible), but stopped whenever possible when returning back from this (far) position to the origin.

This contrasts with [9] and [6] where the number of positions visited by each robot to robocast a line is unbounded (but finite). This is due to the fact that in both approaches, robots are required to make a non null movement whenever activated until they know that their line has been received. Managing an arbitrary large number of movements in a restricted space to prevent collisions yields severe requirements in [6]: either robots are allowed to perform infinitely small movements (and such movements can be seen by other robots with infinite precision), or the scheduler is restricted in its choices for activating robots (no robot can be activated more than k times, for a given k, between any two activations of another robot) and yields to a setting that is not fully asynchronous. Our solution does not require any such hypothesis.

4 Collision-free RoboCast

In this section we enhance the algorithms proposed in Section 3 with the collisionfree feature. In this section we propose novel techniques for collision avoidance that cope with the system asynchrony.

Our solution is based on the same principle of locality as the Voronoi Diagram based schemes. However, acceptable moves for a robot use a different geometric area. This area is defined for each robot r_i as a local zone of movement and is denoted by ZoM_i . We require that each robot r_i moves only inside ZoM_i . The intersection of different ZoM_i must remain empty at all times to ensure collision avoidance. We now present three possible definitions for the zone of movement: ZoM_i^1 , ZoM_i^2 and ZoM_i^3 . All three ensure collision avoidance in CORDA, but only the third one can be computed in a model where robots do not know the initial position of their peers.

Let $P(t) = \{p_1(t), p_2(t), \dots, p_n(t)\}$ be the configuration of the network at time t, such that $p_i(t)$ denotes the position of robot r_i at time t expressed in a global coordinate system. This global coordinate system is unknown to individual robots and is only used to ease the presentation and the proofs. Note that $P(t_0)$ describes the initial configuration of the network.

Definition 1. (Voronoi Diagram)[2] The Voronoi diagram of a set of points $P = \{p_1, p_2, \ldots, p_n\}$ is a subdivision of the plane into n cells, one for each point in P. The cells have the property that a point q belongs to the Voronoi cell of point p_i iff for any other point $p_j \in P$, $dist(q, p_i) < dist(q, p_j)$ where dist(p, q) is the Euclidean distance between p and q. In particular, the strict inequality means that points located on the boundary of the Voronoi diagram do not belong to any Voronoi cell.

Definition 2. (ZoM_i^1) Let $DV(t_0)$ be the Voronoi diagram of the initial configuration $P(t_0)$. For each robot r_i , the zone of movement of r_i at time t, $ZoM_i^1(t)$, is the Voronoi cell of point $p_i(t_0)$ in $DV(t_0)$.

Definition 3. (ZoM_i^2) For each robot r_i , define the distance $d_i = min\{dist(p_i(t_0), p_j(t_0))$ with $r_j \neq r_i\}$. The zone of movement of r_i at time t, $ZoM_i^2(t)$, is the circle centered in $p_i(0)$ and whose diameter is equal to $d_i/2$. A point q belongs to $ZoM_i^2(t)$ iff $dist(q, p_i(t_0)) < d_i/2$.

Definition 4. (ZoM_i^3) For each robot r_i , define the distance $d_i(t) = min\{dist(p_i(t_0), p_j(t))$ with $r_j \neq r_i\}$ at time t. The zone of r_i at time t, $ZoM_i^3(t)$, is the circle centered in $p_i(t_0)$ and whose diameter is equal to $d_i(t)/3$. A point q belongs to $ZoM_i^3(t)$ iff $dist(q, p_i(t_0)) < d_i(t)/3$.

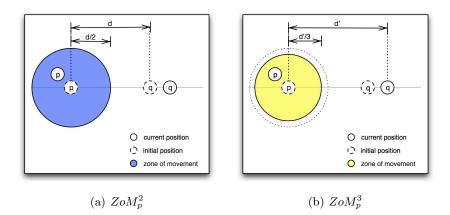


Fig. 1. Example zones of movement: The network is formed of two robots: p and q. d is the distance between the initial positions of p and q (dashed circles), d' is the distance between the initial position of p and the current position of q. The diameter of ZoM_p^2 (blue) is d/2 and that of ZoM_p^3 (yellow) is d'/3.

Note that ZoM^1 and ZoM^2 are defined using information about the initial configuration $P(t_0)$, and thus cannot be used with the hypotheses of Algorithm 2. In contrast, robot r_i only needs to know its *own* initial position and the *current* positions of other robots to compute ZoM_i^3 . As there is no need for r_i to know the *initial* positions of other robots, ZoM_i^3 can be used with Algorithm 2. It remains to prove that ZoM_i^3 guarantees collision avoidance. We first prove that ZoM_i^1 does, which is almost trivial because its definition does not depend on time. Then, it suffices to prove that $ZoM_i^3 \subseteq ZoM_i^2 \subseteq ZoM_i^1$. Besides helping us in the proof, ZoM_i^2 can be interesting in its own as a cheap collision avoidance to the nearest neighbor is much easier that computing a full blown Voronoi diagram.

Lemma 41 If $\forall t$, for each robot r_i , the destination point computed by r_i at t remains inside $ZoM_i^1(t)$, then collisions are avoided.

Proof. By definition of Voronoi diagram, different Voronoi cells do not overlap. Moreover, for a given i, ZoM_i^1 is static and does not change over time. Hence, $\forall i, j \in \Pi, \forall t, t', ZoM_i^1(t) \cap ZoM_i^1(t') = \emptyset$.

Clearly, $ZoM_i^2\subseteq ZoM_i^1$ which means that ZoM_i^2 ensures also collision avoidance.

Lemma 42 If $\forall t$, for each robot r_i , the destination point computed by r_i at t always remains inside $ZoM_i^2(t)$, then collisions are avoided.

The proof of the above lemma follows directly from the fact that $\forall t ZoM_i^2(t) \subseteq ZoM_i^1(t)$ and Lemma 41.

Lemma 43 $\forall t, ZoM_i^3(t) \subseteq ZoM_i^2(t).$

Proof. Fix some robot r_i and let r_j be the closest robot from r_i at time t_0 . Let d_0 denote the initial distance between r_i and r_j , that is, $d_0 = dist(p_i(t_0), p_j(t_0))$. We assume that all robots move only inside their ZoM_i^3 computed as explained in Definition 4. Let $t_1 \ge t_0$ be the first time at which a robot in $\{r_i, r_j\}$, say e.g. r_i , finishes a Look phase after t_0 . The destination computed by r_i in this cycle is located inside $ZoM_i^3(t_1)$, which is a circle centered at $p_i(t_0)$ and whose diameter is $\le d_0/3$. Hence, the destination computed by r_i is distant from $p_i(0)$ by at most $d_0/3$. Let $t_2 \ge t_1$ be the first time after t_1 at which a robot, say r_j , finishes a Look phase. Between t_1 and t_2 , r_i may have finished its Move phase or not. In any case, the observed configuration by r_j at t_2 is such that r_i is distant from $p_j(t_0)$ by at most $d_0 + d_0/3$. This implies that $ZoM_j^3(t_2)$ has a diameter of at most $(d_0 + d_0/3)/3$, which implies that the destination point computed by r_j in this cycle is distant from $p_j(t_0)$ by at most $d_0 + d_0/3$. This implies that the destination point computed by r_j in this cycle is distant from $p_j(t_0)$ by at most $d_0 + d_0/3$. Repeating the argument, we get that $\forall t$, $ZoM_i^3(t)$ has a diameter $\le \sum_{i=1}^{\infty} d_0/3^i$.

Reducing the formula, we obtain that $ZoM_i^3(t)$ is always $\leq d_0/2$, which implies that $ZoM_i^3(t) \subseteq ZoM_i^2(t)$.

Ensuring Collision-freedom in Line Robocast Algorithms To make LineRbcast1 and LineRbcast2 collision-free, it is expected that any destination computed by a robot r_i at t be located within its $ZoM_i^3(t)$. The computation of destinations is modified as follows: Let $dest_i(t)$ be the destination computed by a robot r_i at time t. Based on $dest_i(t)$, r_i computes a new destination $dest'_i(t)$ that ensures collision avoidance. $dest'_i(t)$ can be set to any point located in $[p_i(t_0), dest_i(t)] \cap ZoM_i^3(t)$. For example, we can take $dest'_i(t)$ to be equal to the point located in the line segment $[p_i(t_0), dest_i(t)]$ and distant from $p_i(t_0)$ by a distance of $d_i(t)/2$ with $d_i(t)$ computed as explained in Definition 4.

This modification of the destination computation method does not impact algorithms correctness since it does not depend on the exact value of computed destinations, but on the relationship between the successive positions occupied by each robot. The algorithms remain correct as long as robots keep the capability to freely change their direction of movement and to move in both the positive and the negative part of each such direction. This capability is not altered by the collision avoidance scheme since the origin of the coordinate system of each robot - corresponding to its original position - is strictly included in its zone of movement, be it defined by ZoM^1 , ZoM^2 or ZoM^3 .

Generalisation of the Protocols to n Robots As explained at the end of Section 3, the generalisation of our algorithms to the case of n robots has to deal with the issue of distinguishing robots from each others despite their anonymity. The solution we use is to instruct each robot to move in the close neighbourhood of its original position. Thus, other robots can recognize it by comparing its current position with past ones. For this solution to work, it is necessary that each robot always remains the closest one to all the positions it has previously occupied. Formally speaking, we define the zone of movement ZoM^4 in a similar way as ZoM^3 except that the diameter is this time equal to $d_i(t)/6$ (vs. $d_i(t)/3$). We now show that ZoM^4 provides the required properties. Let r_i and r_j be an arbitrary pair of robots and Let d_{ij} denotes the distance between their initial positions. It can easily shown, using the same arguments as the proof of Lemma 43, that:

- 1. Neither of the two robots moves away from its initial position by a distance greater than $d_{ij}/4$. This implies that each robot remains always at a distance strictly smaller than $d_{ij}/2$ from all the positions it has previously held.
- 2. The distance between r_i (resp. r_j) and all the positions held by r_j (r_i) is strictly greater than $d_{ij}/2$.

Hence, r_i can never be closer than r_j to a position that was occupied by r_j , and vice versa. This implies that it is always possible to recognize a robot by associating it with the position which is closest to it in some previously observed configuration.

5 RoboCast Applications

5.1 Asynchronous Deterministic 2-Gathering

Given a set of n robots with arbitrary initial locations and no agreement on a global coordinate system, n-Gathering requires that all robots eventually reach the same unknown beforehand location. n-Gathering was already solved when n > 2 in both ATOM [9] and CORDA [4] oblivious models. The problem is impossible to solve for n = 2 even in ATOM, except if robots are endowed with persistent memory [9]. In this section we present an algorithm that uses our RoboCast primitive to solve 2-Gathering in the non-oblivious CORDA model.

A first "naive" solution is for each robot to robocast its abscissa and ordinate axes and to meet the other robot at the midpoint m of their initial positions. RoboCasting the two axes is done using our Line RoboCast function described above in conjunction with the ZoM^3 -based collision avoidance scheme.

A second possible solution is to refine Algorithm $\psi_{f-point(2)}$ of [9,10] by using our Line RoboCast function to "send" lines instead of the one used by the authors. The idea of this algorithm is that each robot which is activated for the first time translates and rotates its coordinate system such that the other robot is on its positive *y*-axis, and then it robocasts its (new) *x*-axis to the other robot using our Line Robocast function. In [9], the authors give a method that allows each robot to compute the initial position of one's peer by comparing their two robocast *x*-axes defined above. Then each robot moves toward the midpoint of their initial positions. Our Line RoboCast routine combined with the above idea achieves gathering in asynchronous systems within a bounded (*vs.* finite in [9]) number of movements of robots and using only two (vs. four) variables in their persistent memory.

Theorem 51 There is an algorithm for solving deterministic gathering for two robots in non-oblivious asynchronous networks (CORDA).

5.2 Asynchronous Stigmergy

Stigmergy [6] is the ability of a group of robots that communicate only through vision to exchange binary information. Stigmergy comes to encode bits in the movements of robots. Solving this problem becomes trivial when using our Robo-Cast primitive. First, robots exchange their local coordinate system as explained in Section 3. Then, each robot that has a binary packet to transmit robocasts a line to its peers whose angle with respect to its abscissa encodes the binary information. Theoretically, as the precision of visual sensors is assumed to be infinite, robots are able to observe the exact angle of this transmitted line, hence the size of exchanged messages may be infinite also. However, in a more realistic environment in which sensor accuracy and calculations have a margin of error, it is wiser to discretize the measuring space. For this, we divide the space around the robot in several sectors such that all the points located in the same sector encode the same binary information (to tolerate errors of coding). For instance, to send binary packets of 8 bits, each sector should have an angle equal to $u = 360^{\circ}/2^8$. Hence, when a robot moves through a line whose angle with respect to the abscissa is equal to α , the corresponding binary information is equal to $|\alpha/n|$. Thus, our solution works in asynchronous networks, uses a bounded number of movements and also allows robots to send binary packets and not only single bits as in [6].

6 Conclusion and Perspectives

We presented a new communication primitive for robot networks, that can be used in fully asynchronous CORDA networks. Our scheme has the additional properties of being motion, memory, and computation efficient. We would like to raise some open questions:

- 1. The solution we presented for collision avoidance in CORDA can be used for protocols where robots remain in their initial vicinity during the whole protocol execution. A collision-avoidance scheme that could be used with all classes of protocol is a challenging issue.
- 2. Our protocol assumes that a constant number of positions is stored by each robot. Investigating the minimal number of stored positions for solving a particular problem would lead to interesting new insights about the computing power that can be gained by adding memory to robots.

References

- H. Ando, Y. Oasa, I. Suzuki, and M. Yamashita. Distributed memoryless point convergence algorithm for mobile robots with limited visibility. *Robotics and Au*tomation, *IEEE Transactions on*, 15(5):818–828, 1999.
- F. Aurenhammer. Voronoi diagrams a survey of a fundamental geometric data structure. ACM Computing Surveys (CSUR), 23(3):405, 1991.
- D. Canepa and M. G. Potop-Butucaru. Stabilizing flocking via leader election in robot networks. In SSS, pages 52–66, 2007.
- 4. M. Cieliebak, P. Flocchini, G. Prencipe, and N. Santoro. Solving the robots gathering problem. *Automata, Languages and Programming*, pages 192–192, 2003.
- X. Défago and A. Konagaya. Circle formation for oblivious anonymous mobile robots with no common sense of orientation. In *POMC*, pages 97–104, 2002.
- Y. Dieudonné, S. Dolev, F. Petit, and M. Segal. Deaf, dumb, and chatting asynchronous robots. In OPODIS, pages 71–85, 2009.
- P. Flocchini, G. Prencipe, N. Santoro, and P. Widmayer. Hard tasks for weak robots: The role of common knowledge in pattern formation by autonomous mobile robots. *Algorithms and Computation*, pages 93–102, 1999.
- G. Prencipe. On the feasibility of gathering by autonomous mobile robots. In SIROCCO 2005, volume 3499 of LNCS, pages 246–261. Springer, May 2005.
- I. Suzuki and M. Yamashita. Distributed anonymous mobile robots: Formation of geometric patterns. SIAM Journal of Computing, 28(4):1347–1363, 1999.
- I. Suzuki and M. Yamashita. Erratum: Distributed anonymous mobile robots: Formation of geometric patterns. SIAM Journal of Computing, 36(1):279–280, 2006.

Appendix

A Correctness Analysis of LineRbcast1

In the following we prove that Algorithm 1 satisfies the specification of a Robo-Cast, namely validity and termination. First we introduce some notations that will be further used in the proofs of the algorithm. For each variable v, and each robot r_i , we denote $r_i.v(t)$ the value of the variable v in the local memory of r_i at time t. When the time information can be derived from the context, we use simply $r_i.v$.

Proof of the Validity property. We start by the validity property. For this, we first prove a series of technical lemmas. The following two lemmas state the existence of a time instant at which both robots have reached S_2 and a following time instant at which at least one of them have reached S_3 .

Lemma A1 Eventually, both robots reach state S_2 .

Proof. Thanks to the fairness assumption of the scheduler, every robot is activated infinitely often. The first time each robot is activated, it executes the lines (1.a, 1.b, 1.c) of Algorithm 1 and it reaches the state S_2 .

Lemma A2 Eventually, at least one robot reaches state S_3 .

Proof. Let r_1 and r_2 be two robots executing Algorithm 1, and assume towards contradiction that neither of them reaches state S_3 . But according to Lemma A1, they both eventually reach S_2 . Consider for each robot r_i the cycle in which it reaches state S_2 , and define t_i to be the time of the end of the Look phase of this cycle. Without loss of generality, assume $t_1 \leq t_2$ (the other case is symmetric). Hence, the variable $r_1.pos_1$ describes the position of robot r_2 at t_1 expressed in the local coordinate system of robot r_1 . Let $t_3 > t_2$ be the time at which robot r_2 finishes its cycle that leads it to state S_2 . Between t_2 and t_3 , robot r_2 performed a non null movement because it moved towards the point (1.0) of its local coordinate system (line 1.b of the code). Hence, the position of r_2 at t_3 is different from its position at $t_1 \leq t_2$ which was recorded in the variable $r_1.pos_1$. By assumption, r_2 never reaches state S_3 , so each time it is activated after t_3 it keeps executing the lines 2.a and 2.c of the code and never moves from its current position (reached at t_3). By fairness, there is a time $t \ge t_3$ at which robot r_1 is activated again. At this time, it observes r_2 in a position different from $r_1.pos_1$. This means that for r_1 the condition of line 2.*a* is false. Hence, r_1 executes the else block of the condition (2.b.*) and reaches state S_3 which contradicts the assumption and proves the lemma.

The next lemma expresses the fact that our algorithm exhibits some kind of synchrony in the sense that robots advance in the execution of the algorithm through the different states in unisson. That is, neither of them surpasses the other by more than one stage (state).

18

Lemma A3 If at some time robot r_i is in state S_j and robot r_{1-i} is in state S_k then $|j-k| \leq 1$.

Proof. The proof of the lemma is divided into two parts:

- If robot r_i is in state S_3 and robot r_{1-i} is in state S_j then $j \ge 2$. proof: Since robot r_i is in state S_3 , it has necessarily executed the lines (1.a...1.d) and (2.b.*) of the code. Hence, the value of variable $r_i.pos_1$ is different from that of $r_i.pos_2$. This means that r_i has seen r_{1-i} in at least two different positions which implies that r_{1-i} has been activated at least once. Hence, r_{1-i} has necessarily executed the lines (1.a...1.c) and has reached S_2 .
- If robot r_i is in state S_4 and robot r_{1-i} is in state S_j then $j \ge 3$.
 - proof: For a robot r_{1-i} to reach state S_4 , it must execute the line 3.*a* of the code and detect that the other robot r_{1-i} has changed its direction of movement (it moved toward the negative part of its x-axis). Thus, robot r_{1-i} has necessarily executed lines (2.b.2...2.c) of the code which means that r_{1-i} is in state S_3 . Before this, robot r_{1-i} moved only in one direction, that is, in the positive direction of its x-axis.

This proves the lemma.

The following lemma states that each robot r_i is guaranteed to be observed by its peer at least once in a position located in the positive part of its local x-axis. The observed position is stored in $r_{1-i}.pos_1$. Expressed otherwise, this means that each robot "send" a position located in its positive x-axis to its peer. This property is important for proving validity which correspond to both robots eventually reaching S_3 (Lemmas A5 and A6). Indeed, since each robot r_i is guaranteed that a point located in its local x-axis was received by its peer r_{1-i} , it suffices for r_i to send its line to head toward the negative part of its x-axis and to stay there until it is observed by r_{1-i} . That is, until a position located in its negative x-axis (and thus *distinct* from $r_{1-i}.pos_1$) is received by r_{1-i} .

Lemma A4 For each robot r_i , the variable $r_i.pos_1$ describes a position located in the positive axis of the other robot r_{1-i} .

Proof. The value of the variable $r_i.pos_1$ is assigned for the first time in line 1.*a* when r_i is still in state S_1 . At this time, according to Lemma A3, r_{1-i} is necessarily in state S_1 or S_2 (Otherwise, this would contradict Lemma A3 since we would have a time at which a robot (r_{1-i}) is in a state S_j with $j \ge 3$ concurrently with another robot (r_i) that is in state S_1). This means that the variable $r_i.pos_1$ describes a position held by robot r_{1-i} while it was in state S_1 or S_2 , it is still located in a position of its positive x-axis (or the origin). Hence, the variable $r_i.pos_1$ describes a position located in the positive x-axis of robot r_{1-i} which proves the lemma.

Lemma A5 Eventually, both robots reach state S_3 .

Proof. According to Lemmas A2 and A3, there is a time at which some robot, say r_i , reaches S_3 and the other one (r_{1-i}) is at a state S_j with $j \ge 2$. If $j \ge 3$ then the lemma holds and we are done. So we assume in what follows that r_{1-i} is at S_2 and we prove that it eventually reaches S_3 . Assume for the sake of contradiction that this is not the case, that is, r_{1-i} remains always stuck in S_2 . This implies, according to Lemma A3, that r_i remains also stuck in state S_3 . When r_i is in state S_3 , it keeps executing the line 3.b of the code until it reaches a position located in the negative part of its x-axis. Denote by t_1 the first time at which r_i reaches its negative x-axis. Each time r_i is activated after t_1 , it executes the line 3.c of the code corresponding to a null movement and it never moves from its current position (located in the negative x-axis). This is because we assumed that r_i remains stuck in S_3 forever. By fairness, there is a time $t_2 \ge t_1$ at which r_{1-i} is activated. This time, the condition of line 2.*a* does not hold for robot r_{1-i} because the position returned by observe(i) is located in the negative x-axis of r_i and is different from $r_{1-i}.pos_1$ which is located in the positive part of the x-axis of r_1 (as stated in Lemma A4). Hence, r_{1-i} executes the part 2.b.* of the code and changes its status to S_3 .

Now we are ready to prove the validity property.

Lemma A6 Algorithm 1 satisfies the **validity** property of the Line Robocast Problem for two robots.

Proof. Eventually both robots reach state S_3 according to Lemma A5. Each robot r_i in state S_3 has necessarily executed the blocks 1.* and 2.b.* of the algorithm and thus delivered the line defined by the positions $r_i.pos_1$ and $r_i.pos_2$. Now we prove that this line is well defined and that it does correspond to l_{1-i} , the line sent by r_{1-i} . $r_i.pos_1$ and $r_i.pos_2$ are well defined since they are assigned a value in lines 1.a and 1.b.1 respectively before r_i delivers the line. The assigned values correspond to two positions of r_{1-i} . Moreover, by the condition of line 2.b. we have that these two positions are distinct. It remains to prove that they belong to l_{1-i} .

The values of variables $r_i.pos_1$ and $r_i.pos_2$ are assigned when r_i is in state S_1 and S_2 respectively. Hence, according to Lemma A3, when $r_i.pos_1$ and $r_i.pos_2$ are defined, r_{1-i} did not yet reach S_4 and moved only through its x-axis. This means that $r_i.pos_1$ and $r_i.pos_2$ correspond to two distinct positions of the x-axis of r_{1-i} . Hence, r_i delivered l_{1-i} . Since both robots eventually reach S_3 , both lines l_i and l_{1-i} are eventually delivered.

Proof of the Termination property. Now we prove that the algorithm actually terminates. Before terminating, each robot r_i must be sure that its peer r_{1-i} has received its sent line, that is, r_{1-i} has reached the state S_3 . As already explained, r_i can infer the transition of r_{1-i} to S_3 by detecting a change of its direction of movement. Upon this, r_i can go on to state S_4 and terminates safely. In the

following two lemmas, we prove that at least one robot reaches S_4 . To do this, we first prove in Lemma A7 that at least one robot, say r_{1-i} , is observed by its peer in two distinct positions located in the positive part of its x-axis. Later, when r_{1-i} moves to its negative x-axis and r_i observes it there, r_i learns that r_{1-i} changed its direction of movement which allows the transition of r_i to state S_4 . This is proved in Lemma A8.

Lemma A7 For at least one robot, say r_i , the two variables $r_i.pos_1$ and $r_i.pos_2$ describe two positions located in the positive x-axis of r_{1-i} and such that $r_i.pos_2 > r_i.pos_1$ with respect to the local coordinate system of r_{1-i} .

Proof. Let r_i be the first robot to enter state S_3 . The other robot (r_{1-i}) is in state S_2 in accordance with Lemma A3. Hence, r_{1-i} moved only through the positive direction of its x-axis, so the variables $r_i.pos_1$ and $r_i.pos_2$ correspond to two different positions in the positive x-axis of robot r_{1-i} or in its origin. But since $r_i.pos_2$ was observed after $r_i.pos_1$ and r_{1-i} moves in the positive direction of its x-axis, then $r_i.pos_2 > r_i.pos_1$ with respect to the local coordinate system of r_{1-i} .

Lemma A8 Eventually, at least one robot reaches state S_4 .

Proof. We assume towards contradiction that no robot ever reach S_4 . But according to Lemma A5, both robots eventually reach S_3 . Hence we consider a configuration in which both robots are in S_3 and we derive a contradiction by proving that at least one of them does reach S_4 . Let r_i be the robot induced by Lemma A7. The variables $r_i.pos_1$ and $r_i.pos_2$ of r_i correspond to two different positions occupied by r_{1-i} while it was on the positive part of its x-axis. By assumption, r_{1-i} eventually reaches state S_3 . At the end of this cycle, r_{1-i} is either located in a position of its negative x-axis or it keeps executing lines 3.b.* each time it is activated until it reaches such a position, let's call it p. The next cycles it is activated, r_{1-i} executes the line 3.c of the code because we assumed that r_{1-i} never reaches S_4 . It results that r_{1-i} never quits p. Hence, r_{1-i} is guaranteed to be eventually observed by r_i in a position that is smaller than $r_i.pos_2$ with respect to the local coordinate system of r_{1-i} . At this point, the condition of line 3.4 becomes true for robot r_i , which executes the block of the code labelled by 3.4.* and sets is state to S_4 .

Lemma A9 Eventually, both robots reach state S_4 .

Proof. According to Lemma A8 at least one robot, say r_i , eventually reaches S_4 . When r_i reaches S_4 , r_{1-i} is in a state S_j with $j \ge 3$ according to Lemma A3. If j = 4 the lemma holds trivially, so we consider in the following a configuration in which r_{1-i} is in state S_3 and we prove that it eventually joins r_i in state S_4 . The variables $r_{1-i}.pos_1$ and $r_{1-i}.pos_2$ of r_{1-i} describe two distinct positions located in the x-axis of robot r_i . Let p_i describes the position of r_i at the end of the cycle in which it reaches S_4 . Once in state S_4 , r_i moves towards the point myIntersect each time it is activated until it reaches it (lines 3.a.2 and 4.a of the code). myIntersect is the point located at the intersection of l_i and $nextl_i$ and its distance from p_i is finite. Since r_i is guaranteed to move a minimal distance of δ_i at each cycle in which it is activated, it reaches myIntersect after a finite number of cycles. The next cycle, r_i chooses a destination located outside l_i (4.b.2) and moves towards it before finishing the algorithm. Let t_i be the time of the end of the Move phase of this cycle and let q_i be the position occupied by r_i at t_i . $q_i \notin l_i$ means that $q_i \notin line(r_{1-i}.pos_1, r_{1-i}.pos_2)$. It follows that $r_{1-i}.pos_2 \notin line(r_{1-i}.pos_1, q_i)$. By fairness, there is a time $t > t_i$ at which r_{1-i} is activated again, and at which it observes r_i in the position q_i . But we showed that q_i is such that $r_{1-i}.pos_2 \notin line(r_{1-i}.pos_1, q_i)$. Hence the condition of line 3.a is true for robot r_{1-i} in t and it reaches state S_4 in this cycle.

Lemma A10 Algorithm 1 satisfies the **termination** property of the Line Robocast Problem for two robots.

Proof. Eventually, both robots reach S_4 as proved by Lemma A9. Let r_i be a robot in state S_4 and let p_i be its position at the end of the cycle in which it reaches S_4 , Let d_i be the distance between p_i and $myIntersect_i$. Since the scheduler is fair and a robot is allowed to move in each cycle a minimal distance of σ_i before it can be stopped by the scheduler, it follows that r_i is guaranteed to cover the distance d_i and to reach myIntersect after at most d_i/σ_i cycles. The next cycle, r_i moves outside l_i and terminates.

Theorem A11 Algorithm 1 solves the Line Robocast Problem for two robots in unoblivious CORDA systems.

Proof. Follows directly from Lemmas A6 and A10.

B Generic RoboCast

In this section, we describe the RoboCast Algorithm for the general case of n robots. Then we give its formal proof of correctness.

B.1 Description of the Algorithm

The Line RoboCast algorithm for the general case of n processes is a simple generalization of the algorithm for two robots. The code of this algorithm is in Algorithm 3. It consists in the following steps: The first time a robot r_i is activated in state S_1 , it simply records the positions of all other robots in the array pos_1 []. Then, it moves towards the point (1,0) of its local coordinate system and goes to state S_2 . When r_i is in state S_2 , each time it observes some robot r_i in a position different from the one recorded in $pos_1[j]$, it stores it in $pos_2[j]$. At this point, r_i can infer the line sent by r_j which passes through both $pos_1[j]$ and $pos_2[j]$. Hence, r_i delivers $line(r_i, r_j)$ which corresponds to l_j . r_i does not move from its current position until it assigns a value to all the cells of $pos_2[$ (apart from the one associated with itself which is meaningless). That is, until it delivers all the lines sent by its peers. Upon this, it transitions to S_3 and heads to the point (-1,0). At state S_3 , r_i waits until it observes that all other robots changed the direction of their movement or moved outside their sent line. Then, it moves towards a position located outside its current line l_i . In particular, it goes to a position located in $nextl_i$, the next line it will robocast. Hence r_i first passes by the intersection of l_i and $nextl_i$. Then, it moves outside l_i and terminates the algorithm.

B.2 A Correctness Argument

We prove the correctness of our algorithm by proving that it satisfies the validity and termination property of the RoboCast Problem specification. The general idea of the proof is similar to that of the two robots algorithms even if it is a little more involved.

Proof of the Validity property.

Lemma B1 Eventually, all robots reach state S_2 .

Proof. Similar to the proof of Lemma A1.

Lemma B2 Eventually, at least one robot reaches state S_3 .

Proof. Let $\mathbb{R} = \{r_1, r_2, \ldots, r_n\}$ be a set of n robots executing Algorithm 3. We assume towards contradiction that neither of them ever reach S_3 . But according to Lemma B1, all robots eventually reach state S_2 . Thus we proceed in the following way: we consider a configuration in which all robots are in S_2 and we prove that at least one of them eventually reaches S_3 which leads us to a contradiction. Consider for each robot $r_i \in \mathbb{R}$ the cycle in which it reaches the

Algorithm 3 Line RoboCast LineRbcast1 for n robots: Algorithm for robot r_i

Variables: state: initially S_1 . $pos_1[1...n]$: initially \perp $pos_2[1...n]$: initially \perp destination, intersection: initially \perp

Actions:

1. State $[S_1]$: %Robot r_i starts the algorithm%

a. foreach 1 ≤ j ≤ n do pos₁[j] ← observe(j) enddo
b. destination ← (1,0)_i
c. state ← S₂
d. Move to destination

2. State $[S_2]$: $\%r_i$ knows at least one position of the lines of all other robots %

```
a. if \exists j \neq i s.t. (pos_2[j] = \bot) and (pos_1[j] \neq observe(j)) then
                    1. pos_2[j] \leftarrow observe(j)
                    2. Deliver (line(pos_1[j], pos_2[j]) endif
         b. if \exists j \neq i s.t. (pos_2[j] = \bot) then destination \leftarrow observe(i)
         c. else
                    1. destination \leftarrow (-1, 0)_i
                    2. state \leftarrow S_3 endif
         d. Move to destination
3. State [S_3]: \%r_i knows the lines of all other robots \%
         a. if \forall j \neq i \ pos_2[j] is outside the line segment [pos_1[j], observe(j)] then
                    1. intersection \leftarrow l_i \cap nextl_i
                    2. destination \leftarrow intersection
                    3. state \leftarrow S_4
         b. else if (observe(i) \ge (0,0)_i) then destination \leftarrow (-1,0)
         c. else destination \leftarrow observe(i) endif endif
         d. Move to destination
4. State [S<sub>4</sub>]: \%r_i knows that all robots have learned its line l_i\%
         a. if (observe(i) \neq intersection) then destination \leftarrow intersection
         b. else
                   1. r_i rotates its coordinate system such that its x-axis and the origin match with
                    nextl_i and intersection respectively.
                   2. destination \leftarrow (1,0)_i
                   3. return endif
```

c. Move to destination

state S_2 , and define t_i and t'_i to be respectively the time of the end of the Look and the Move phases of this cycle. Let t_k be equal to $min\{t_1, t_2, \ldots, t_n\}$ and let r_k be the corresponding robot. That is, at t_k , robot r_k finishes to execute a Look phase and at the end of this cycle it reaches state S_2 . This means that for robot r_k , the array $r_k.pos_1[]$ corresponds to the configuration of the network at time t_k .

Between $t_i \geq t_k$ and t'_i each robot executes complete Compute and Move phases. The movement performed in this phase cannot be null because robots move from the point (0,0) towards the point (1,0) of their local coordinate system (line 1.*b* of the code). Moreover, the scheduler cannot stop a robot before it reaches the point $(\delta_i, 0)$. Hence, the position of each robot r_i at t'_i is different from its position at t_i . But the position of r_i at t_i is equal to its position at t_k . Thus, the position of each robot at t'_i is different from its position at t_k which is stored in $r_k.pos_1[i]$. We have by assumption that no robot ever reaches S_3 . So each time a robot r_i is activated after t'_i , it keeps executing the lines 2.b and 2.d of the code and never moves from its current position reached at t'_i . Define t_{end} to be equal to $max\{t'_1, \ldots, t'_n\}$. It follows that at $\forall t \geq t_{end}$, the position of each robot r_i at t is different from $r_k.pos_1[i]$. But by fairness, there is a time $t_a \geq t_{end}$ at which r_k is activated again. At this cycle, r_k observes that each robot r_i is located in a position different from $r_k.pos_1[i]$. Consequently, if there exists a robot r_i such that $r_k.pos_2[i]$ was equal to \perp before this cycle, then r_k assigns the current observed position of r_i to $r_k.pos_2[i]$. This implies that the condition of line 2.b is now false for r_k . Hence r_k executes the else block of the condition and reaches state S_3 . This is the required contradiction that proves the lemma.

Lemma B3 For each robot *i*, for each robot *j*, if $r_i .pos_1[j] \neq \bot$, then $pos_1[j]$ describes a position that is necessarily located in the positive x-axis of robot *j*.

Proof. The proof follows the same lines as that of Lemma A4.

Lemma B4 If at some time robot r_i is in state S_j and robot r'_i is in state S_k then $|j - k| \le 1$.

Proof. The lemma can be proved by generalising the proof of Lemma A3 to the case of n robots. We divide the analysis into two subcases:

- If robot r_i is in state S_3 and robot r'_i is in state S_j then $j \ge 2$. *proof:* If r_i is in state S_3 , this means that it observed all other robots in at least two distinct positions. This means that all other robots started a Move phase, which implies that they all finished a complete Compute phase in which they executed the lines 1.a...1c of the code and reached S_2 .
- If robot r_i is in state S_4 and robot r'_i is in state S_j then $j \ge 3$. proof: For a robot to reach S_4 , it must detect a change of direction by all other robots in the network which is captured by the condition of line 3.a. We prove that this condition cannot be true unless all robots have reached S_3 and no robot in the network is still in state S_2 . Indeed, robots in state S_1 move in the positive direction of their x-axis and those in state S_2 does not move. So, a robot cannot change its direction before reaching state S_3 . This change of direction is reflected by the choice of point (-1, 0) as a destination in line 2.c.1 of the code before the transition to state S_3 in line 2.c.2.

Corollary B5 If at some time t, $\exists i, j$ such that robots r_i and r_j are respectively in state S_k and S_{k+1} at t with $k \in \{1, 2, 3\}$, then all the robots of the network are either in state S_k or S_{k+1} at t.

Proof. Since r_i is in state S_k , no robot in the network can be in a state S_l with $l \ge k + 2$ according to Lemma B4. Similarly, the fact that r_j is in state S_{k+1} implies that no robot in the network can be in a state S_l with $l \le k - 1$. By the conjunction of the two facts, we obtain that all robots are either in state S_k or S_{k+1} .

The following lemma proves the fact that if at time t_a , some robots of the network are in state S_2 and others are in state S_3 , then at least one robot that is in state S_2 at t_a eventually reaches S_3 .

Lemma B6 Let $G_2(t), G_3(t)$ be the groups of robots that are respectively in state S_2 and S_3 at time t. If at some time $t_a ||G_2(t_a)|| > 0$ and $||G_3(t_a)|| > 0$, then there exists a time $t \ge t_a$ at which $||G_3(t)|| \ge ||G_3(t_a)|| + 1$.

Proof. Since by assumption $||G_2(t_a)|| > 0$ and $||G_3(t_a)|| > 0$, it follows from Corollary B5 that $\mathbb{R} = G_2(t_a) \cup G_3(t_a)$. We assume toward contradiction that $\forall t \geq t_a \ G_2(t) = G_2(t_a) = G_2$, that is, no robot that is in S_2 at t_a ever reach S_3 . But by assumption we have $||G_2|| > 0$. Hence $\forall t > t_a \ ||G_2(t)|| = ||G_2|| > 0$. This implies, in accordance with Lemma B4, that no robot of the network can reach S_4 after t_a . Consequently, $\forall t' \geq t \ G_3(t') = G_3(t) = G_3 = \mathbb{R} \setminus G_2$.

- As discussed above, we have by assumption that all robots have reached S_2 at t_a . This means that all robots have executed the line 1.*a* of the code at t_a . Consequently, at t_a , $\forall r_i \in \mathbb{R}$, $\forall r_j \in \mathbb{R}$ with $j \neq i$, $r_i .pos_1[j] \neq \bot$. Moreover, according to Lemma B3 all these positions stored in the arrays $pos_1[]$ describe positions located in the positive x-axis of the corresponding robots.
- By assumption we have that $\forall t > t_a ||G_3(t)|| = ||G_3||$. This means that no robot in G_3 ever reach S_4 . Hence robots of G_3 never execute the block 3.a.* of the code and they keep executing the line 3.b each time they are activated until they reach a position in their negative x-axes. Then, once a robot of G_3 arrives to the negative part of its x-axis, it keeps executing the line 3.c of the code each time it is activated. As we showed above, the positions stored in the different arrays $pos_1[]$ are different from \bot and correspond to points located in the positive x-axes of the corresponding robots. Since robots of G_3 eventually get to positions in their negative x-axes and stay there, they eventually get observed by each robot in the network in a position different from the one that is stored in its local variable $pos_1[]$ which correspond to a positive x-axis position. Formally, there is a time $t_v > t$ at which $\forall r_i \in G_3, \forall r_j \in \mathbb{R}$ with $r_j \neq r_i r_j \cdot pos_2[i] \neq \bot$.
- Let r_1, \ldots, r_m be the robots of G_2 . Consider for each robot $r_i \in G_2$ the cycle in which it reaches the state S_2 , and define t_i and t'_i to be respectively the time of the end of the Look and the Move phase and of this cycle. Let t_k be equal to $\min\{t_1, t_2, \ldots, t_m\}$ and let $r_k \in G_2$ be the corresponding robot. That is, at t_k , robot r_k finishes to execute a Look phase and at the end of this cycle it reaches state S_2 . This means that for robot $r_k, r_k.pos_1[]$ describes the configuration of the network at time t_k . Following the lines of the proof of Lemma B2 we obtain that there exist a time $t_u > t$ at which $\forall r_j \in G_2 \setminus \{r_k\}, r_k.pos_2[j] \neq \bot$.

Now, let $t_x = max\{t_v, t_u\}$. From the discussion above it results that at time t_x , for robot $r_k \in G_2$ it holds that $\forall r_j \in G_3, r_k.pos_2[j] \neq \bot$ and $\forall r_j \in G_2 \setminus \{r_k\}, r_k.pos_2[j] \neq \bot$. Hence, at $t_x, \forall j \in \mathbb{R} \setminus \{r_k\}, r_k.pos_2[j] \neq \bot$. This

means that the condition of line 2.*a* is false for r_k at t_x , so r_k executes the *else* block of this condition when activated after t_x and reaches state S_3 which contradicts the assumption that $\forall t > t_a ||G_2(t)|| = ||G_2||$.

Lemma B7 Eventually, all robots of the network reach state S_3

Proof. Follows from Lemmas B1, B2 and B6.

Lemma B8 Algorithm 3 satisfies the validity property.

Proof. The idea of the proof is similar to Lemma A6. According to Lemma B7, all robots eventually reach state S_3 . Each robot that reach state S_3 has necessarily executed the block 1.* and the line 2.c of Algorithm 3. Hence, this robot has its two arrays $pos_1[]$ and $pos_2[]$ well defined and according to the way the elements of $pos_2[]$ are defined (refer to line 2.a of the code), we conclude that $\forall 1 \leq j \leq n, pos_2[j] \neq pos_1[j]$. Moreover, since robots move only through their x-axes, $\forall j, pos_2[j]$ and $pos_1[j]$ correspond to two positions of the x-axis of robot j. Hence, each robot in state S_3 can infer the x-axes of its peers from $pos_1[]$ and $pos_2[]$ which proves the lemma.

Proof of the Termination property.

Lemma B9 Eventually, at least one robot reaches state S_4

Proof. We assume for the sake of contradiction that no robot ever reach S_4 . However, according to Lemma B7, all robots eventually reach state S_3 . Hence we consider a configuration in which all robots are in state S_3 and we prove that at least one of them eventually reaches S_4 which leads us to a contradiction. The idea of the proof is similar to that of Lemma B2: we consider the first robot r_k that executes a Look phase of a cycle leading it from S_2 to S_3 . Let t_k be the time of the end of this Look phase. Clearly, $\forall r_i \in \mathbb{R} \setminus \{r_k\}, r_k.pos_1[i] \text{ and } r_k.pos_2[i]$ describe two positions of r_i located in its positive x-axis. This is because these two positions were observed by r_k before r_i reaches S_3 and changes its direction of movement towards its negative x-axis. Moreover, $r_k . pos_2[i] > r_k . pos_1[i]$ with respect to the local coordinate system of r_i since r_i was observed in $r_k.pos_1[i]$ and then in $r_k.pos_2[i]$ while it was moving along the positive direction of its x-axis. The claim can be proved formally as in Lemma A7. After t_k , all other robots of the network perform a transition from S_2 to S_3 . Then, they head towards the negative part of their local x-axes (lines 2.c.1 and 3.b of the code) and stay there (line 3.c) since they cannot reach S_4 by assumption. Each robot r_i that reaches the negative part of its x-axis is located in a position p_i such that $r_k.pos_2[i]$ is outside the line segment $[r_k.pos_2[i], p_i]$. Hence the condition of line 3.*a* eventually becomes true for robot r_k , and it reaches S_4 after executing the block 3.a.* of the code. This is the required contradiction.

Lemma B10 Eventually, all robots of the network reach S_4 .

Proof. The proof is similar to that of Lemma A9. The intuition behind it is as follows: we proved in Lemma B9 that at least one robot, say r_i , eventually reaches S_4 . After reaching S_4 , and after a finite number of executed cycles, r_i quits l_i (line 4.b.2). When they observe r_i outside l_i , the other robots transition to state S_4 .

Lemma B11 Algorithm 3 satisfies the termination property.

Proof. The proof is similar to that of Lemma A10

Theorem B12 Algorithm 1 solves the Line Robocast Problem for n robots in unoblivious CORDA systems.

Proof. Follows directly from Lemmas B8 and B11.

28