

AUTHOR QUERY FORM

	<p>Journal: AMC</p> <p>Article Number: 23182</p>	<p>Please e-mail your responses and any corrections to:</p> <p>E-mail: correctionsaptara@elsevier.com</p>
---	--	---

Dear Author,

Please check your proof carefully and mark all corrections at the appropriate place in the proof (e.g., by using on-screen annotation in the PDF file) or compile them in a separate list. Note: if you opt to annotate the file with software other than Adobe Reader then please also highlight the appropriate place in the PDF file. To ensure fast publication of your paper please return your corrections within 48 hours.

Your article is registered as a regular item and is being processed for inclusion in a regular issue of the journal. If this is NOT correct and your article belongs to a Special Issue/Collection please contact p.kumar.7@elsevier.com immediately prior to returning your corrections.

For correction or revision of any artwork, please consult <http://www.elsevier.com/artworkinstructions>

Any queries or remarks that have arisen during the processing of your manuscript are listed below and highlighted by flags in the proof. Click on the '[Q](#)' link to go to the location in the proof.


Location in article	Query / Remark: click on the Q link to go Please insert your reply or correction at the corresponding line in the proof		
Q1	AU: The author names have been tagged as given names and surnames (surnames are highlighted in teal color). Please confirm if they have been identified correctly.		
Q2	AU: This section comprises references that occur in the reference list but not in the body of the text. Please cite each reference in the text or, alternatively, delete it. Any reference not dealt with will be retained in this section.		
Q3	AU: Please validate Acknowledgment section.		
Q4	AU: Please validate Ref. [8].		
<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td data-bbox="492 1447 1049 1548">Please check this box or indicate your approval if you have no corrections to make to the PDF file</td> <td data-bbox="1049 1447 1116 1548"></td> </tr> </table>		Please check this box or indicate your approval if you have no corrections to make to the PDF file	
Please check this box or indicate your approval if you have no corrections to make to the PDF file			

Thank you for your assistance.



Contents lists available at ScienceDirect

Applied Mathematics and Computation

journal homepage: www.elsevier.com/locate/amc

High-order full discretization for anisotropic wave equations

A.M. Portillo

IMUVA, Departamento de Matemática Aplicada, Escuela de Ingenierías Industriales, Universidad de Valladolid, Spain

ARTICLE INFO

MSC:
65M12
65M20

Keywords:

Anisotropic media
Energy conservation
Discrete energy
Finite differences
Splitting method

ABSTRACT

Two-dimensional linear wave equation in anisotropic media, on a rectangular domain with initial conditions and periodic boundary conditions, is considered. The energy of the problem is contemplated. The space discretization is reached by means of finite differences on a uniform grid, paying attention to the mixed derivative of the equation. The discrete energy of the semi-discrete problem is introduced. For the time integration of the system of ordinary differential equations obtained, a fourth order exponential splitting method, which is a geometric integrator, is proposed. This time integrator is efficient and easy to implement. The stability condition for time step and space step ratio is deduced. Numerical experiments displaying the good behavior in the long time integration and the efficiency of the numerical solution are provided.

© 2017 Elsevier Inc. All rights reserved.

1. Introduction

Anisotropic media, in which the velocity may depend on the direction, are important in several wave propagation models, as anisotropic Maxwell's equations [3] or in elastic anisotropic waves in solid-earth geophysics [11]. Anisotropy seems to be an everywhere property of earth materials and its effects on seismic data must be taken into account. Today, seismic anisotropy is considered in exploration and reservoir characterization [24]. Stability analysis of the Perfectly Matched Layer method applied to anisotropic waves in two dimensions are studied for example in [4,17,21].

In this paper we study a particular case of the equation considered in [5], the two dimensional time-dependent anisotropic and dispersive wave equation

$$\partial_{tt}u = \alpha_{11}\partial_{xx}u + 2\alpha_{12}\partial_{xy}u + \alpha_{22}\partial_{yy}u - s^2u. \quad (1)$$

We assume that the coefficients α_{ij} and s^2 in (1) are constant satisfying

$$\alpha_{11} > 0, \alpha_{22} > 0, \alpha_{11}\alpha_{22} - \alpha_{12}^2 > 0, \quad (2)$$

so that in the steady state the equation is elliptic.

When a problem posed in an infinite domain is solved numerically, it is necessary to reduce the computational domain to a finite domain, which forces us to choose suitable boundary conditions. On physical applications, it is desirable to have numerical models that resemble the dynamics of the continuous problems. If periodic boundary conditions are taken, invariants of the original problem are preserved. Here, we consider Eq. (1) in a rectangular domain $R = [a, b] \times [c, d]$, for the unknown $u(x, y, t)$, with periodic boundary conditions,

$$u(a, y, t) = u(b, y, t), \quad y \in [c, d], \quad (3)$$

E-mail address: anapor@mat.uva.es

<https://doi.org/10.1016/j.amc.2017.11.045>

0096-3003/© 2017 Elsevier Inc. All rights reserved.

$$\partial_x u(a, y, t) = \partial_x u(b, y, t), \quad y \in [c, d], \quad (4)$$

$$u(x, c, t) = u(x, d, t), \quad x \in [a, b], \quad (5)$$

$$\partial_y u(x, c, t) = \partial_y u(x, d, t), \quad x \in [a, b]. \quad (6)$$

and initial conditions,

$$u(x, y, 0) = u_0(x, y), \quad \partial_t u(x, y, 0) = v_0(x, y), \quad (7)$$

which satisfy the periodic boundary conditions in R .

In an isotropic medium, $\alpha_{12} = 0$, $\alpha_{11} = \alpha_{22}$, we get the Klein-Gordon wave equation. If in the Eq. (1), $\alpha_{12} = 0$ but $\alpha_{11} \neq \alpha_{22}$, there are different speeds on x direction and on y direction, which corresponds to the orthotropic case. However, the general anisotropic case occurs when $\alpha_{12} \neq 0$. This means the existence of a spatial mixed derivative term in (1). In the literature there are other problems containing spatial mixed derivative terms as convection-diffusion equations [8,13,14], parabolic problems with application to pricing options [12,15,26] or in numerical mathematics when coordinate transformations are applied to allow working on simple domains or on uniform grids. In [13,14] the spatial derivatives are approximated by means of second-order finite differences, whereas in [8,12] fourth order finite differences are used. Then, the semi-discrete system of ordinary differential equations (ODEs) is integrated using alternating direction implicit schemes of first and second orders. For hyperbolic problems, as (1), is less common to use implicit methods because the stability condition is less demanding and Δt and Δx are of similar magnitude.

We are interested in obtaining efficient high order in space and time schemes for the numerical solution of Eq. (1), with periodic boundary conditions (3)–(6) and initial conditions (7). In this paper, the spatial derivatives are approximated using second and fourth order finite differences. As the boundary conditions are periodic, the matrix in the ODE system achieved is a block circulant matrix where each block is too a circulant matrix. For second order approximation of the spatial derivatives we prove that this matrix is symmetric negative definite and we locate the interval that contains its eigenvalues. We study well-posedness by using the discrete energy associated to the problem. For fourth order approximation of the spatial derivatives we compute numerically the eigenvalues of the corresponding symmetric matrix for moderate values of the dimension of the matrix, and the eigenvalues obtained are negative values.

We rewrite the semi-discrete problem as first order in time and the resulting ODE system is a Hamiltonian problem. This ODE system is split in two intermediate problems which are solved exactly. A fourth order splitting scheme is achieved by the flow composition of the two intermediate problems chosen. In stead of using alternating directions as in [8], the contribution of all spatial derivatives are regarded together because that the splitting obtained is computationally more efficient. A similar splitting method is considered in [2] for an isotropic problem with absorbing boundary conditions. The stability interval of the splitting method and the stability condition for the ratio between the time step and the space step are studied.

Useful overviews of splitting methods can be found in the review papers [6,20]. Splitting schemes are especially useful in the scope of geometric integration. Actually, splitting integrators preserve structural properties of the original problem's flow as long as the intermediate problems' flow do. The good performance of the geometric integrators in the long time integration of Hamiltonian ODE systems is well showed in [10,22].

The paper is organized as follows. The energy of the continuous problem is introduced in Section 2. In Section 3, second order approximation of the spatial derivatives are considered and the corresponding discrete energy is regarded. Section 4 is devoted to the exponential splitting time integrator. In Section 5 fourth order approximation of the spatial derivatives are introduced. Numerical experiments are conducted in Section 6. The good long time behavior as well as the efficiency of the splitting scheme by comparing with the fourth-order four-stage Runge-Kutta method in terms of CPU time are displayed.

2. Energy of the continuous problem

Knowing the energy of the system is important because it allows knowing an amount that is conserved over time without solving the equation. Moreover, when the continuous problem is discretized in space, we can compare the energy of the continuous problem with the energy of the semi-discrete problem.

An energy,

$$E(t) = \frac{1}{2} \iint_R ((\partial_t u(x, y, t))^2 + \alpha_{11} (\partial_x u(x, y, t))^2 + 2\alpha_{12} \partial_x u(x, y, t) \partial_y u(x, y, t) + \alpha_{22} (\partial_y u(x, y, t))^2 + s^2 u(x, y, t)^2) dx dy,$$

can be introduced. Here

$$(u, v) = \iint_R v^* u dx dy, \quad \|u\|^2 = (u, u).$$

Then,

$$E(t) = \frac{1}{2} (\|\partial_t u\|^2 + \alpha_{11} \|\partial_x u\|^2 + 2\alpha_{12} (\partial_x u, \partial_y u) + \alpha_{22} \|\partial_y u\|^2 + s^2 \|u\|^2).$$

62 From ellipticity condition (2), it is deduced that $E(t)$ is non-negative. It can be shown that solutions of (1) with periodic
63 boundary conditions conserve $E(t)$. Multiplying Eq. (1) by $\partial_t u$, the equation can be rewritten as a divergence. Then, consider-
64 ing the integral over the rectangle R , it can be seen that $E'(t) = 0$, from the divergence theorem and the periodic conditions.
65 Therefore the energy $E(t)$ is constant with time and

$$E(t) = E(0) = \frac{1}{2} \iint_R (u_0(x, y)^2 + \alpha_{11} (\partial_x u_0(x, y))^2 + 2\alpha_{12} \partial_x u_0(x, y) \partial_y u_0(x, y) + \alpha_{22} (\partial_y u_0(x, y))^2 + s^2 u_0(x, y)^2) dx dy. \quad (8)$$

66 In this way, we can compute the energy of the problem calculating the initial energy through the initial condition.

67 3. Spatial discretization

68 We start approximating the spatial derivatives in (1) by using finite differences. For the sake of simplicity, we consider
69 the same size step in both directions x and y , that is, for a value of N , $h = \frac{b-a}{N}$ and $M = \frac{d-c}{h}$. Let $x_j = a + (j-1)h$,
70 $j = 1, \dots, N+1$, and $y_l = c + (l-1)h$, $l = 1, \dots, M+1$, be the nodes of the spatial discretization. This produces a uniform
71 grid in the computational domain and a matrix of unknowns $u_{jl}(t) = u(x_j, y_l, t)$.

72 In general, finite difference approximation involves a stencil of points surrounding u_{jl} . In this section, second order spatial
73 derivatives in the direction x and in the direction y are approximated by second order central finite differences

$$\partial_{xx} u_{jl} \approx \frac{u_{j-1,l} - 2u_{jl} + u_{j+1,l}}{h^2},$$

$$\partial_{yy} u_{jl} \approx \frac{u_{j,l-1} - 2u_{jl} + u_{j,l+1}}{h^2},$$

74 in stencil form

$$\frac{1}{h^2} \begin{pmatrix} 0 & 0 & 0 \\ 1 & -2 & 1 \\ 0 & 0 & 0 \end{pmatrix}, \quad \frac{1}{h^2} \begin{pmatrix} 0 & 1 & 0 \\ 0 & -2 & 0 \\ 0 & 1 & 0 \end{pmatrix},$$

75 respectively.

76 Mixed derivative can be approximated by second order finite differences

$$\partial_{xy} u_{jl} \approx \frac{u_{j-1,l-1} - u_{j+1,l-1} + u_{j+1,l+1} - u_{j-1,l+1}}{4h^2},$$

77 in stencil form

$$\frac{1}{4h^2} \begin{pmatrix} -1 & 0 & 1 \\ 0 & 0 & 0 \\ 1 & 0 & -1 \end{pmatrix}. \quad (9)$$

78 Another alternative stencil forms for second order approximation of second order of mixed derivatives are

$$\frac{1}{2h^2} \begin{pmatrix} -1 & 1 & 0 \\ 1 & -2 & 1 \\ 0 & 1 & -1 \end{pmatrix}, \quad \frac{1}{2h^2} \begin{pmatrix} 0 & -1 & 1 \\ -1 & 2 & -1 \\ 1 & -1 & 0 \end{pmatrix}. \quad (10)$$

79 The first stencil form should be used in the case $\alpha_{12} > 0$, whereas the second is suitable when $\alpha_{12} < 0$. If, as it happens
80 in (1), the equation combines ∂_{xx} , ∂_{yy} and ∂_{xy} , choosing (10) instead of (9) for the approximation of mixed derivative, the
81 complete discretization of the differential operator produces an M-matrix [9]. Taking this into account, here mixed derivative
82 is approximated as follows

if $\alpha_{12} > 0$,

$$2\partial_{xy} u_{jl} \approx \frac{u_{j-1,l} + u_{j+1,l} - 2u_{jl} + u_{j,l-1} + u_{j,l+1} - u_{j-1,l+1} - u_{j+1,l-1}}{h^2},$$

if $\alpha_{12} < 0$,

$$2\partial_{xy} u_{jl} \approx \frac{-u_{j-1,l} - u_{j+1,l} + 2u_{jl} - u_{j,l-1} - u_{j,l+1} + u_{j-1,l+1} + u_{j+1,l-1}}{h^2}.$$

83 Let it be \mathbf{u}_j the approximations to the unknowns $(u(x_j, y_1), \dots, u(x_j, y_{M+1}))^T$, for fixed x_j . Denoting $\mathbf{u}_h = [\mathbf{u}_1^T, \dots, \mathbf{u}_{N+1}^T]^T$,
84 we achieve the second order in time ODEs system

$$\frac{d^2 \mathbf{u}_h}{dt^2} = A \mathbf{u}_h, \quad (11)$$

85 where the matrix of the problem is

$$A = \frac{1}{h^2}B - s^2I, \quad (12)$$

86 I is the identity matrix of dimension $(N+1)(M+1)$ and

$$B = \begin{bmatrix} B_1 & B_2 & & & B_2^T \\ B_2^T & B_1 & B_2 & & \\ & & \ddots & \ddots & \ddots \\ & & & B_2^T & B_1 & B_2 \\ B_2 & & & B_2^T & B_1 \end{bmatrix}. \quad (13)$$

87 If $\alpha_{12} > 0$,

$$B_1 = (\alpha_{22} + \alpha_{12})C_1 - 2\alpha_{11}I_{M+1},$$

$$B_2 = \alpha_{12}C_2 + \alpha_{11}I_{M+1},$$

88 and, if $\alpha_{12} < 0$,

$$B_1 = (\alpha_{22} - \alpha_{12})C_1 - 2\alpha_{11}I_{M+1},$$

$$B_2 = -\alpha_{12}C_2^T + \alpha_{11}I_{M+1},$$

89 with

$$C_1 = \begin{bmatrix} -2 & 1 & & & 1 \\ 1 & -2 & 1 & & \\ & \ddots & \ddots & \ddots & \\ & & & 1 & -2 & 1 \\ 1 & & & 1 & -2 \end{bmatrix}, \quad C_2 = \begin{bmatrix} 1 & & & & -1 \\ -1 & 1 & & & \\ & & \ddots & & \\ & & & -1 & 1 \\ 0 & & & -1 & 1 \end{bmatrix}.$$

90 Notice that B is a block circulant matrix where each block is in turn a circulant matrix.

91 **Lemma 1.** The eigenvalues of matrix B in (13), for the coefficients α_{ij} meeting (2), satisfy

$$\sigma(B) \subset [-4(\alpha_{11} + \alpha_{22}) - 8|\alpha_{12}|, 0].$$

92 **Proof.** We begin considering the case $\alpha_{12} > 0$.

$$B = \text{circ}(B_1, B_2, 0, \dots, 0, B_2^T),$$

$$B_1 = \text{circ}(-2(\alpha_{11} + \alpha_{22} + \alpha_{12}), \alpha_{22} + \alpha_{12}, 0, \dots, 0, \alpha_{22} + \alpha_{12}),$$

$$B_2 = \text{circ}(\alpha_{11} + \alpha_{12}, 0, \dots, 0, -\alpha_{12}),$$

$$B_2^T = \text{circ}(\alpha_{11} + \alpha_{12}, -\alpha_{12}, 0, \dots, 0).$$

93 We consider the following polynomials associated to the blocks of matrix B

$$h_1(z) = -2(\alpha_{11} + \alpha_{22} + \alpha_{12}) + (\alpha_{22} + \alpha_{12})z + (\alpha_{22} + \alpha_{12})z^M,$$

$$h_2(z) = (\alpha_{11} + \alpha_{12}) - \alpha_{12}z^M,$$

$$h_{N+1}(z) = (\alpha_{11} + \alpha_{12}) - \alpha_{12}z.$$

94 Then, the eigenvalues of matrix B are (see [16,18])

$$\lambda_{l,k} = \tilde{\varepsilon}_l^0 h_1(\tilde{\omega}_k) + \tilde{\varepsilon}_l h_2(\tilde{\omega}_k) + \tilde{\varepsilon}_l^N h_{N+1}(\tilde{\omega}_k), \quad l = 1, \dots, N+1, \quad k = 1, \dots, M+1,$$

95 where,

$$\omega_{M+1} = \exp\left(\frac{2\pi i}{M+1}\right), \quad \tilde{\omega}_k = (\omega_{M+1})^k,$$

$$\varepsilon_{N+1} = \exp\left(\frac{2\pi i}{N+1}\right), \quad \tilde{\varepsilon}_l = (\varepsilon_{N+1})^l.$$

96

$$\begin{aligned} \lambda_{l,k} = & -2(\alpha_{11} + \alpha_{22} + \alpha_{12}) + (\alpha_{22} + \alpha_{12}) \left(\exp\left(\frac{2\pi ik}{M+1}\right) + \exp\left(\frac{2\pi ikM}{M+1}\right) \right) \\ & + \exp\left(\frac{2\pi il}{N+1}\right) \left((\alpha_{11} + \alpha_{12}) - \alpha_{12} \exp\left(\frac{2\pi ikM}{M+1}\right) \right) + \exp\left(\frac{2\pi ilN}{N+1}\right) \left((\alpha_{11} + \alpha_{12}) - \alpha_{12} \exp\left(\frac{2\pi ik}{M+1}\right) \right). \end{aligned}$$

97 Taking into account that,

$$\begin{aligned} \exp\left(\frac{2\pi ilN}{N+1}\right) &= \exp\left(\frac{-2\pi il}{N+1}\right), \\ \exp\left(\frac{2\pi ikM}{M+1}\right) &= \exp\left(\frac{-2\pi ik}{M+1}\right), \\ \exp\left(\frac{2\pi il}{N+1}\right) \exp\left(\frac{2\pi ikM}{M+1}\right) &+ \exp\left(\frac{2\pi ilN}{N+1}\right) \exp\left(\frac{2\pi ik}{M+1}\right) \\ &= 2 \cos\left(\frac{2\pi l}{N+1}\right) \cos\left(\frac{2\pi k}{M+1}\right) + 2 \sin\left(\frac{2\pi l}{N+1}\right) \sin\left(\frac{2\pi k}{M+1}\right) \\ &= 2 \cos\left(\frac{2\pi l}{N+1} - \frac{2\pi k}{M+1}\right), \end{aligned}$$

98 and then,

$$\lambda_{l,k} = -2(\alpha_{11} + \alpha_{22} + \alpha_{12}) + 2(\alpha_{11} + \alpha_{12}) \cos\left(\frac{2\pi l}{N+1}\right) + 2(\alpha_{22} + \alpha_{12}) \cos\left(\frac{2\pi k}{M+1}\right) - 2\alpha_{12} \cos\left(\frac{2\pi l}{N+1} - \frac{2\pi k}{M+1}\right).$$

99 Clearly, $\lambda_{l,k} \in D = \{(x, y) : (x, y) \in [0, 2\pi] \times [0, 2\pi]\}$ where

$$f(x, y) = -2(\alpha_{11} + \alpha_{22} + \alpha_{12}) + 2(\alpha_{11} + \alpha_{12}) \cos(x) + 2(\alpha_{22} + \alpha_{12}) \cos(y) - 2\alpha_{12} \cos(x - y).$$

100 We are going to prove that $D \subset [-4(\alpha_{11} + \alpha_{22}) - 8|\alpha_{12}|, 0]$. For that, we calculate the absolute extrema of function f on
101 the set D . As $f(x, y)$ is a continuous function in the compact domain $[0, 2\pi] \times [0, 2\pi]$, the Weierstrass Theorem guarantees
102 that the absolute maximum and the absolute minimum of $f(x, y)$ are reached in points of $[0, 2\pi] \times [0, 2\pi]$. First, we study
103 the function at the boundary.

104 If $y \in [0, 2\pi]$,

$$\begin{aligned} f(0, y) &= f(2\pi, y) = -2(\alpha_{11} + \alpha_{22} + \alpha_{12}) + 2(\alpha_{11} + \alpha_{12}) + 2(\alpha_{22} + \alpha_{12}) \cos(y) - 2\alpha_{12} \cos(y) \\ &= -2\alpha_{22}(1 + \cos(y)). \end{aligned}$$

105 In that case, $-4\alpha_{22} \leq f(0, y) = f(2\pi, y) \leq 0$.

106 If $x \in [0, 2\pi]$,

$$\begin{aligned} f(x, 0) &= f(x, 2\pi) = -2(\alpha_{11} + \alpha_{22} + \alpha_{12}) + 2(\alpha_{11} + \alpha_{12}) \cos(x) + 2(\alpha_{22} + \alpha_{12}) - 2\alpha_{12} \cos(x) \\ &= -2\alpha_{11}(1 + \cos(x)). \end{aligned}$$

107 Thus, $-4\alpha_{11} \leq f(x, 0) = f(x, 2\pi) \leq 0$.

108 Second, we look for the possible extrema of $f(x, y)$ in $(0, 2\pi) \times (0, 2\pi)$, which have to satisfy

$$\begin{aligned} \frac{\partial f}{\partial x} &= -2(\alpha_{11} + \alpha_{12}) \sin(x) + 2\alpha_{12} \sin(x - y) = 0, \\ \frac{\partial f}{\partial y} &= -2(\alpha_{22} + \alpha_{12}) \sin(y) - 2\alpha_{12} \sin(x - y) = 0, \end{aligned}$$

109 like this,

$$2\alpha_{12} \sin(x - y) = 2(\alpha_{11} + \alpha_{12}) \sin(x) = -2(\alpha_{22} + \alpha_{12}) \sin(y). \quad (14)$$

110 From (14), it is obtained

$$\sin(y) = -\frac{\alpha_{11} + \alpha_{12}}{\alpha_{22} + \alpha_{12}} \sin(x), \quad (15)$$

111 and therefore

$$2\alpha_{12} \sin(x - y) = 2\alpha_{12} \sin(x) \cos(y) + 2\alpha_{12} \frac{\alpha_{11} + \alpha_{12}}{\alpha_{22} + \alpha_{12}} \sin(x) \cos(x), \quad (16)$$

112 and using another time (14) in (16)

$$2\alpha_{12} \sin(x) \cos(y) + 2\alpha_{12} \frac{\alpha_{11} + \alpha_{12}}{\alpha_{22} + \alpha_{12}} \sin(x) \cos(x) = 2(\alpha_{11} + \alpha_{12}) \sin(x). \quad (17)$$

113 Eq. (17) is satisfied if $\sin(x) = 0$ or

$$\alpha_{12} \cos(y) + \alpha_{12} \frac{\alpha_{11} + \alpha_{12}}{\alpha_{22} + \alpha_{12}} \cos(x) = (\alpha_{11} + \alpha_{12}). \quad (18)$$

114 From (15), if $\sin(x) = 0$, then $\sin(y) = 0$, and the only option in $(0, 2\pi) \times (0, 2\pi)$ is (π, π) , and $f(\pi, \pi) = -4\alpha_{11} - 4\alpha_{22} -$
115 $8\alpha_{12} < 0$.

116 Next, we are going to prove that (18) does not have any solution. From (18), we have

$$\cos(y) = -\frac{\alpha_{11} + \alpha_{12}}{\alpha_{22} + \alpha_{12}} \cos(x) + \frac{\alpha_{11} + \alpha_{12}}{\alpha_{12}}. \quad (19)$$

117 Using that $\sin^2(y) + \cos^2(y) = 1$ and (15) and (19) we achieve

$$\cos(x) = -\frac{\alpha_{12}(\alpha_{22} + \alpha_{12})}{2(\alpha_{11} + \alpha_{12})^2} + \frac{\alpha_{12}}{2(\alpha_{22} + \alpha_{12})} + \frac{\alpha_{22} + \alpha_{12}}{2\alpha_{12}}. \quad (20)$$

118 We are going to prove that the right term in (20) is greater than 1, which can not be. The second part of the Eq. (20) is
119 equivalent to

$$\frac{\alpha_{22}^2\alpha_{11}^2 + 2\alpha_{11}^2\alpha_{12}^2 + 2\alpha_{22}^2\alpha_{11}\alpha_{12} + 2\alpha_{11}^2\alpha_{22}\alpha_{12} + 4\alpha_{11}\alpha_{22}\alpha_{12}^2 + 4\alpha_{11}\alpha_{12}^3 + \alpha_{12}^4}{2\alpha_{11}^2\alpha_{22}\alpha_{12} + 2\alpha_{11}^2\alpha_{12}^2 + 4\alpha_{11}\alpha_{22}\alpha_{12}^2 + 4\alpha_{11}\alpha_{12}^3 + 2\alpha_{22}\alpha_{12}^3 + 2\alpha_{12}^4}. \quad (21)$$

120 To prove that (21) is greater than 1 it suffices that

$$\begin{aligned} &\alpha_{22}^2\alpha_{11}^2 + 2\alpha_{11}^2\alpha_{12}^2 + 2\alpha_{22}^2\alpha_{11}\alpha_{12} + 2\alpha_{11}^2\alpha_{22}\alpha_{12} + 4\alpha_{11}\alpha_{22}\alpha_{12}^2 + 4\alpha_{11}\alpha_{12}^3 + \alpha_{12}^4 \\ &> 2\alpha_{11}^2\alpha_{22}\alpha_{12} + 2\alpha_{11}^2\alpha_{12}^2 + 4\alpha_{11}\alpha_{22}\alpha_{12}^2 + 4\alpha_{11}\alpha_{12}^3 + 2\alpha_{22}\alpha_{12}^3 + 2\alpha_{12}^4, \end{aligned}$$

121 or equivalently

$$2\alpha_{22}^2\alpha_{11}\alpha_{12} - 2\alpha_{22}\alpha_{11}^3 + \alpha_{22}^2\alpha_{11}^2 - \alpha_{12}^4 = 2\alpha_{22}\alpha_{12}(\alpha_{11}\alpha_{22} - \alpha_{12}^2) + \alpha_{11}^2\alpha_{22}^2 - \alpha_{12}^4 > 0,$$

122 which is true thanks to (2).

123 Then, summarizing the absolute minimum of $f(x, y)$ in $[0, 2\pi] \times [0, 2\pi]$ is $-4\alpha_{11} - 4\alpha_{22} - 8\alpha_{12}$ and the absolute maxi-
124 mum is 0.

125 Now, we consider the case $\alpha_{12} < 0$.

$$B = \text{circ}(B_1, B_2, 0, \dots, 0, B_2^T),$$

$$B_1 = \text{circ}(-2(\alpha_{11} + \alpha_{22} - \alpha_{12}), \alpha_{22} - \alpha_{12}, 0, \dots, 0, \alpha_{22} - \alpha_{12}),$$

$$B_2 = \text{circ}(\alpha_{11} - \alpha_{12}, \alpha_{12}, 0, \dots, 0),$$

$$B_2^T = \text{circ}(\alpha_{11} - \alpha_{12}, 0, \dots, 0, \alpha_{12}).$$

126 We consider the following polynomials associated to the blocks of matrix B

$$h_1(z) = -2(\alpha_{11} + \alpha_{22} - \alpha_{12}) + (\alpha_{22} - \alpha_{12})z + (\alpha_{22} - \alpha_{12})z^M,$$

$$h_2(z) = (\alpha_{11} - \alpha_{12}) + \alpha_{12}z,$$

$$h_{N+1}(z) = (\alpha_{11} - \alpha_{12}) + \alpha_{12}z^M.$$

127 In a similar way as in the previous case we achieve

$$\lambda_{l,k} = -2(\alpha_{11} + \alpha_{22} - \alpha_{12}) + 2(\alpha_{11} - \alpha_{12}) \cos\left(\frac{2\pi l}{N+1}\right) + 2(\alpha_{22} - \alpha_{12}) \cos\left(\frac{2\pi k}{M+1}\right) + 2\alpha_{12} \cos\left(\frac{2\pi l}{N+1} + \frac{2\pi k}{M+1}\right).$$

128 In this case we consider the function

$$\begin{aligned} f(x, y) &= -2(\alpha_{11} + \alpha_{22} + |\alpha_{12}|) + 2(\alpha_{11} + |\alpha_{12}|) \cos(x) + 2(\alpha_{22} + |\alpha_{12}|) \cos(y) - 2|\alpha_{12}| \cos(x + y), \\ (x, y) &\in [0, 2\pi] \times [0, 2\pi]. \end{aligned}$$

129 Following a similar reasoning than in the case $\alpha_{12} > 0$, we reach an equation similar to (17) but in this case with $|\alpha_{12}|$.

130 Consequently, we conclude

$$\sigma(B) \subset [-4(\alpha_{11} + \alpha_{22}) - 8|\alpha_{12}|, 0]. \quad \square$$

131 **Lemma 2.** The matrix

$$A = \frac{1}{h^2}B - s^2I$$

132 is symmetric negative definite.

133 **Proof.** As the matrix B in (13) is symmetric, this is also true for the matrix A .

134 Since the eigenvalues of the matrix A are

$$\sigma(A) = \left\{ \frac{1}{h^2} \mu - s^2, \quad \mu \in \sigma(B) \right\},$$

135 from Lemma 1 we deduce the result. □

136 **Theorem 3.** The discrete energy

$$E_h(t)(\mathbf{u}, \mathbf{v}) = \frac{h^2}{2} (\mathbf{v}^T \mathbf{v} - \mathbf{u}^T \mathbf{A} \mathbf{u}), \tag{22}$$

137 is conserved for $(\mathbf{u}_h, d\mathbf{u}_h/dt)$, being \mathbf{u}_h the solution of (11).

138 **Proof.** From Lemma 2, (22) is a norm. If \mathbf{u}_h is a solution of (11),

$$\begin{aligned} \frac{dE_h}{dt}(t)(\mathbf{u}_h, d\mathbf{u}_h/dt) &= h^2 \frac{d\mathbf{u}_h}{dt}^T \frac{d^2\mathbf{u}_h}{dt^2} - h^2 \frac{d\mathbf{u}_h}{dt}^T \mathbf{A} \mathbf{u}_h \\ &= h^2 \frac{d\mathbf{u}_h}{dt}^T \left(\frac{d^2\mathbf{u}_h}{dt^2} - \mathbf{A} \mathbf{u}_h \right) = 0. \end{aligned}$$

139 □

140 Then the discrete energy norm is conserved and the problem (11) is well posed.

141 **4. Time discretization**

142 We rewrite problem (11) as a first order system, naming $\mathbf{v}_h = [\frac{d}{dt} \mathbf{u}_1^T, \dots, \frac{d}{dt} \mathbf{u}_{N+1}^T]^T$,

$$\frac{d}{dt} \begin{bmatrix} \mathbf{u}_h \\ \mathbf{v}_h \end{bmatrix} = \begin{bmatrix} 0 & I \\ A & 0 \end{bmatrix} \begin{bmatrix} \mathbf{u}_h \\ \mathbf{v}_h \end{bmatrix}, \tag{23}$$

143 where I is the identity matrix of dimension $(N + 1)(M + 1)$. We notice system (23) is a Hamiltonian problem.

144 **4.1. Exponential splitting method**

145 Denoting k the time step, we propose to approximate the exact solution of (23),

$$\begin{bmatrix} \mathbf{u}(\mathbf{t} + \mathbf{k}) \\ \mathbf{v}(\mathbf{t} + k) \end{bmatrix} = \exp \left(k \begin{bmatrix} 0 & I \\ A & 0 \end{bmatrix} \right) \begin{bmatrix} \mathbf{u}(\mathbf{t}) \\ \mathbf{v}(\mathbf{t}) \end{bmatrix}, \quad t \geq 0,$$

146 by using an exponential splitting method as time integrator. We split the matrix of the problem (23) in two parts

$$\begin{bmatrix} 0 & I \\ A & 0 \end{bmatrix} = \begin{bmatrix} 0 & I \\ 0 & 0 \end{bmatrix} + \begin{bmatrix} 0 & 0 \\ A & 0 \end{bmatrix} = M_1 + M_2.$$

147 The intermediate problems

$$\frac{d}{dt} \begin{bmatrix} \mathbf{u}_h \\ \mathbf{v}_h \end{bmatrix} = M_i \begin{bmatrix} \mathbf{u}_h \\ \mathbf{v}_h \end{bmatrix}, \quad i = 1, 2,$$

148 can be solved exactly using that $M_i^2 = 0$ for $i = 1, 2$ and,

$$\exp(kM_1) = \begin{bmatrix} I & kI \\ 0 & I \end{bmatrix}, \quad \exp(kM_2) = \begin{bmatrix} I & 0 \\ kA & I \end{bmatrix}.$$

149 Then, the flows of these intermediate problems applied to $[\mathbf{u}, \mathbf{v}]^T$ are

$$\begin{aligned} \psi_k^{[1]} : \exp(kM_1) \begin{bmatrix} \mathbf{u} \\ \mathbf{v} \end{bmatrix} &= \begin{bmatrix} \mathbf{u} + k\mathbf{v} \\ \mathbf{v} \end{bmatrix}, \\ \psi_k^{[2]} : \exp(kM_2) \begin{bmatrix} \mathbf{u} \\ \mathbf{v} \end{bmatrix} &= \begin{bmatrix} \mathbf{u} \\ \mathbf{v} + kA\mathbf{u} \end{bmatrix}. \end{aligned}$$

150 To advance a step of size k in time, once we have solved exactly each intermediate step, it is necessary combining these
151 solutions to obtain an approximation of the solution of (23). To do this, first we use the symmetric second order Strang
152 splitting $S^{[2]}$

$$S_k^{[2]} = \psi_{k/2}^{[1]} \circ \psi_k^{[2]} \circ \psi_{k/2}^{[1]}, \tag{24}$$

153 and then, by composition of $S^{[2]}$, we consider the fourth order integrator $S^{[4]}$ [23,25]

$$S_k^{[4]} = S_{\alpha k}^{[2]} \circ S_{\beta k}^{[2]} \circ S_{\alpha k}^{[2]}, \quad \text{with } \alpha = \frac{1}{2 - 2^{1/3}}, \quad \beta = 1 - 2\alpha. \tag{25}$$

154 The advantage of composing exact solutions in this way is that geometric properties of the true flow are preserved. Sym-
 155 plectic time integrators [10,22] not only provides better qualitative properties of the numerical solution, but also better
 156 accuracy when a long time computation is made.

157 It is possible to save some computational cost in (25) by join together the last step in the composition of $S_{\alpha k}^{[2]}$ and the
 158 first one in $S_{\beta k}^{[2]}$ and similarly, the last one in the composition of $S_{\beta k}^{[2]}$ and the first one in $S_{\alpha k}^{[2]}$. That is,

$$\begin{aligned} S_k^{[4]} &= \psi_{\alpha k/2}^{[1]} \circ \psi_{\alpha k}^{[2]} \circ \psi_{\alpha k/2}^{[1]} \circ \psi_{\beta k/2}^{[1]} \circ \psi_{\beta k}^{[2]} \circ \psi_{\beta k/2}^{[1]} \circ \psi_{\alpha k/2}^{[1]} \circ \psi_{\alpha k}^{[2]} \circ \psi_{\alpha k/2}^{[1]} \\ &= \psi_{\alpha k/2}^{[1]} \circ \psi_{\alpha k}^{[2]} \circ \psi_{(\alpha+\beta)k/2}^{[1]} \circ \psi_{\beta k}^{[2]} \circ \psi_{(\alpha+\beta)k/2}^{[1]} \circ \psi_{\alpha k}^{[2]} \circ \psi_{\alpha k/2}^{[1]}. \end{aligned} \quad (26)$$

159 Notice that, if many steps are performed without output, only three evaluation of $\psi^{[1]}$ and $\psi^{[2]}$ are required per time step.

160 This splitting method is explicit and it is easy to implement. However, it is not unconditionally stable and the stability
 161 has to be studied.

162 4.2. Stability discussion

163 To study the stability of the numerical solution obtained with the scheme proposed in the previous subsection, we
 164 consider the stability matrix and the stability interval associated to the method. Since A is symmetric negative definite, the
 165 matrix $(-A)^{1/2}$ is well defined. Considering

$$Q = \begin{bmatrix} (-A)^{1/2} & 0 \\ 0 & I \end{bmatrix},$$

166 the matrix $M(k, -A)$ with which the method $S_k^{[4]}$ proceeds,

$$S_{\parallel}^{[\Delta]} : M(k, -A) \begin{bmatrix} \mathbf{u} \\ \mathbf{v} \end{bmatrix},$$

167 can be expressed as $M(k, -A) = Q^{-1}R(k(-A)^{1/2})Q$, where $R(\omega)$ is the stability matrix of the method. Following [7], $R(\omega)$ can
 168 be computed as

$$\begin{bmatrix} 1 & \frac{\alpha}{2}\omega \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ -\alpha\omega & 1 \end{bmatrix} \begin{bmatrix} 1 & \frac{\alpha+\beta}{2}\omega \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ -\beta\omega & 1 \end{bmatrix} \begin{bmatrix} 1 & \frac{\alpha+\beta}{2}\omega \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ -\alpha\omega & 1 \end{bmatrix} \begin{bmatrix} 1 & \frac{\alpha}{2}\omega \\ 0 & 1 \end{bmatrix}. \quad (27)$$

169 Then,

$$R(\omega) = \begin{bmatrix} R_1(\omega) & R_2(\omega) \\ R_3(\omega) & R_4(\omega) \end{bmatrix}$$

170 where

$$R_1(\omega) = R_4(\omega) = 1 - \frac{\omega^2}{2} + \frac{\omega^4}{24} + \frac{1}{36}(6 + 5 \cdot 2^{1/3} + 4 \cdot 2^{2/3})\omega^6, \quad (28)$$

171

$$R_2(\omega) = \omega - \frac{\omega^3}{6} - \frac{1 + 2^{1/3}}{72 \cdot 2^{2/3}}\omega^5 + \frac{25 + 20 \cdot 2^{1/3} + 16 \cdot 2^{2/3}}{1728}\omega^7, \quad (29)$$

172

$$R_3(\omega) = -\omega + \frac{\omega^3}{6} + \frac{4 + 4 \cdot 2^{1/3} + 3 \cdot 2^{2/3}}{144}\omega^5. \quad (30)$$

173 The splitting method is stable if the size of the powers of $M(k, -A)$ are bounded in the matrix norm associated to the
 174 discrete energy norm. In a similar way than in [2], we rewrite the discrete energy (22) as

$$\begin{aligned} E_h(t)(\mathbf{u}, \mathbf{v}) &= \frac{h^2}{2} (\mathbf{v}^T \cdot \mathbf{v} + ((-A)^{1/2}\mathbf{u})^T ((-A)^{1/2}\mathbf{u})) \\ &= |||(-A)^{1/2}\mathbf{u}, \mathbf{v}|||_2 = |||Q[\mathbf{u}, \mathbf{v}]^T|||_2 := |||[\mathbf{u}, \mathbf{v}]|||_Q. \end{aligned}$$

175 Therefore,

$$\begin{aligned} |||M^n(k, -A)|||_Q &= |||QM^n(k, -A)Q^{-1}|||_2 \\ &= |||(QM(k, -A)Q^{-1})^n|||_2 \\ &= |||R^n(k(-A)^{1/2})|||_2. \end{aligned} \quad (31)$$

176 The study of the boundedness of the powers (31) is not easy in general (cf. [1]) but, in order to do this, it is necessary
177 to consider the *stability interval* of the method.

178 **Definition 4.** The stability interval of a method with stability matrix $R(\omega)$ is $[0, \omega_*]$ if ω_* is the largest nonnegative value
179 such that

$$\rho(R(\omega)) \leq 1, \quad \omega \in [0, \omega_*],$$

180 where $\rho(R(\omega))$ is the spectral radius of $R(\omega)$.

181 **Theorem 5.** The value of ω_* in the stability interval of (26) is

$$\omega_* = \sqrt{\frac{-1 + \sqrt{1 + 1152\gamma}}{48\gamma}}, \quad \gamma = \frac{6 + 5 \cdot 2^{1/3} + 4 \cdot 2^{2/3}}{36}.$$

182 **Proof.** From (27), $\det(R(\omega)) = 1$. Then the eigenvalues $\lambda_1(\omega)$, $\lambda_2(\omega)$ of $R(\omega)$ are the solutions of

$$\lambda^2 - 2R_1(\omega)\lambda + 1 = 0.$$

183 If $R_1(\omega)^2 - 1 > 0$ the eigenvalues of $R(\omega)$ are real numbers and, since $\lambda_1(\omega)\lambda_2(\omega) = 1$, we deduce that $\rho(R(\omega)) > 1$.

184 If $R_1(\omega)^2 - 1 < 0$ the eigenvalues of $R(\omega)$ are complex numbers satisfying $|\lambda_j(\omega)| = 1$ for $j = 1, 2$ and then $\rho(R(\omega)) = 1$.

185 If $R_1(\omega)^2 - 1 = 0$ the eigenvalues of $R(\omega)$ are real numbers with modulus 1 and then $\rho(R(\omega)) = 1$.

186 Let it be ω_* the real nonnegative solution of $R_1(\omega) - 1 = 0$. From (28) ω_* is the only real nonnegative solution of

$$\omega^2 \left(-\frac{1}{2} + \frac{1}{24}\omega^2 + \gamma\omega^4 \right) = 0,$$

187 whose expression is

$$\omega_* = \sqrt{\frac{-1 + \sqrt{1 + 1152\gamma}}{48\gamma}} \approx 0.9711.$$

188 As

$$-\frac{1}{2} + \frac{1}{24}\omega^2 + \gamma\omega^4 \leq 0, \quad \omega \in [0, \omega_*],$$

189 thus

$$R_1(\omega) - 1 \leq 0, \quad \omega \in [0, \omega_*].$$

190 Moreover,

$$R_1(\omega) + 1 = 2 - \frac{1}{2}\omega^2 + \frac{1}{24}\omega^4 + \gamma\omega^6 > 2 - \frac{1}{2}\omega^2 \geq \frac{3}{2}, \quad \omega \in [0, 1].$$

191 We conclude that

$$R_1(\omega)^2 - 1 = (R_1(\omega) - 1)(R_1(\omega) + 1) \leq 0, \quad \omega \in [0, \omega_*],$$

192 and we achieve the result. □

193 Since the eigenvalues of $k(-A)^{1/2} = \frac{k}{h}(-B + s^2h^2I)^{1/2}$ must be in the *stability interval*, we obtain the stability condition

$$\frac{k}{h} \sqrt{4(\alpha_{11} + \alpha_{22}) + 8|\alpha_{12}| + s^2h^2} < \sqrt{\frac{-1 + \sqrt{1 + 1152\gamma}}{48\gamma}}.$$

194 This will be reached, for sh small enough, when

$$\frac{k}{h} < \frac{0.9711}{\sqrt{4(\alpha_{11} + \alpha_{22}) + 8|\alpha_{12}|}}. \tag{32}$$

195 Our numerical experiments corroborate that stability is achieved when the time step k is chosen to meet (32).

196 5. Fourth order spatial discretization

197 Computational cost becomes especially important when the number of equations in the system increases. In order to
198 approach Eq. (1) with periodic boundary conditions (3)–(6) and initial conditions (7), with higher accuracy, it is convenient
199 to introduce finite differences with order greater than two. Like this, higher computational efficiency can be achieved. In
200 this section we consider fourth order approximation of the spatial derivatives in a similar way as in Section 1.3.1 of [8] and
201 in Section 3.1 of [12].

202 Second order spatial derivatives in the direction x and in the direction y are approximated by fourth order central finite
 203 differences

$$\begin{aligned} \partial_{xx} u_{jl} &\approx \frac{1}{h^2} \left(-\frac{1}{12} u_{j-2,l} + \frac{4}{3} u_{j-1,l} - \frac{5}{2} u_{jl} + \frac{4}{3} u_{j+1,l} - \frac{1}{12} u_{j+2,l} \right), \\ \partial_{yy} u_{jl} &\approx \frac{1}{h^2} \left(-\frac{1}{12} u_{j,l-2} + \frac{4}{3} u_{j,l-1} - \frac{5}{2} u_{jl} + \frac{4}{3} u_{j,l+1} - \frac{1}{12} u_{j,l+2} \right), \end{aligned}$$

204 in stencil form

$$\frac{1}{12h^2} \begin{pmatrix} 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ -1 & 16 & -30 & 16 & -1 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \end{pmatrix}, \quad \frac{1}{12h^2} \begin{pmatrix} 0 & 0 & -1 & 0 & 0 \\ 0 & 0 & 16 & 0 & 0 \\ 0 & 0 & -30 & 0 & 0 \\ 0 & 0 & 16 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 \end{pmatrix},$$

205 respectively.

206 Mixed derivative are approximated by the following fourth order finite differences

$$\begin{aligned} \partial_{xy} u_{jl} &\approx \frac{1}{144h^2} (u_{j-2,l-2} - 8u_{j-2,l-1} + 8u_{j-2,l+1} - u_{j-2,l+2} - 8u_{j-1,l-2} + 64u_{j-1,l-1} - 64u_{j-1,l+1} + 8u_{j-1,l+2} \\ &\quad - 64u_{j+1,l-1} + 64u_{j+1,l+1} - 8u_{j+1,l+2} - u_{j+2,l-2} + 8u_{j+2,l-1} - 8u_{j+2,l+1} + u_{j+2,l+2}), \end{aligned}$$

207 in stencil form

$$\frac{1}{144h^2} \begin{pmatrix} -1 & 8 & 0 & -8 & 1 \\ 8 & -64 & 0 & 64 & -8 \\ 0 & 0 & 0 & 0 & 0 \\ -8 & 64 & 0 & -64 & 8 \\ 1 & -8 & 0 & 8 & -1 \end{pmatrix}.$$

208 As in Section 3, we consider \mathbf{u}_j the approximations to the unknowns $(u(x_j, y_1), \dots, u(x_j, y_{M+1}))^T$, for fixed x_j . We con-
 209 sider $\mathbf{u}_h = [\mathbf{u}_1^T, \dots, \mathbf{u}_{N+1}^T]^T$, and $\mathbf{v}_h = [\frac{d}{dt} \mathbf{u}_1^T, \dots, \frac{d}{dt} \mathbf{u}_{N+1}^T]^T$. We rewrite this problem as a first order ordinary differential sys-
 210 tem,

$$\frac{d}{dt} \begin{bmatrix} \mathbf{u}_h \\ \mathbf{v}_h \end{bmatrix} = \begin{bmatrix} 0 & I \\ A & 0 \end{bmatrix} \begin{bmatrix} \mathbf{u}_h \\ \mathbf{v}_h \end{bmatrix}, \tag{33}$$

211 where I is the identity matrix of dimension $(N+1)(M+1)$, $A = \frac{1}{h^2} B - s^2 I$,

$$B = \frac{1}{72} \begin{bmatrix} B_1 & B_2 & B_3 & & & B_3^T & B_2^T \\ B_2^T & B_1 & B_2 & B_3 & & & B_3^T \\ B_3^T & B_2^T & B_1 & B_2 & B_3 & & \\ & & \ddots & \ddots & \ddots & \ddots & \ddots \\ & & & B_3^T & B_2^T & B_1 & B_2 & B_3 \\ B_3 & & & B_3^T & B_2^T & B_1 & B_2 & \\ B_2 & B_3 & & & B_3^T & B_2^T & B_1 & \end{bmatrix}, \tag{34}$$

212

$$C_1 = \begin{bmatrix} -180 & 96 & -6 & & & -6 & 96 \\ 96 & -180 & 96 & -6 & & & -6 \\ -6 & 96 & -180 & 96 & -6 & & \\ & & & \ddots & \ddots & \ddots & \\ & & & -6 & 96 & -180 & 96 & -6 \\ -6 & & & -6 & 96 & -180 & 96 \\ 96 & -6 & & & -6 & 96 & -180 \end{bmatrix},$$

213

Table 1
The three cases of α_{ij} considered.

Run	α_{11}	α_{22}	α_{12}
1.2	0.875	0.625	-0.217
2.2	0.160	0.940	0.225
2.4	0.472	0.628	0.443

Table 2
Minimum eigenvalue of matrix B .

Run	Second order FD	Fourth order FD
1.2	-7.7360	-7.9981
2.2	-6.2000	-5.8663
2.4	-7.9440	-5.9727

$$C_2 = \begin{bmatrix} 0 & 64 & -8 & & & & 8 & -64 \\ -64 & 0 & 64 & -8 & & & & 8 \\ 8 & -64 & 0 & 64 & -8 & & & \\ & & & \ddots & \ddots & \ddots & & \\ & & & 8 & -64 & 0 & 64 & -8 \\ -8 & & & & 8 & -64 & 0 & 64 \\ 64 & -8 & & & & 8 & -64 & 0 \end{bmatrix},$$

$$C_3 = \begin{bmatrix} 0 & -8 & 1 & & & & -1 & 8 \\ 8 & 0 & -8 & 1 & & & & -1 \\ -1 & 8 & 0 & -8 & 1 & & & \\ & & & \ddots & \ddots & \ddots & & \\ & & & -1 & 8 & 0 & -8 & 1 \\ 1 & & & & -1 & 8 & 0 & -8 \\ -8 & 1 & & & & -1 & 8 & 0 \end{bmatrix},$$

$$B_1 = \alpha_{22}C_1 - 180\alpha_{11}I_{M+1},$$

$$B_2 = \alpha_{12}C_2 + 96\alpha_{11}I_{M+1},$$

$$B_3 = \alpha_{12}C_3 - 6\alpha_{11}I_{M+1}.$$

Notice that A is a symmetric matrix which is five block circulant matrix and, in turn, each block is a circulant matrix with five elements non zero in each row.

Combining this spatial discretization with the time splitting (26), we obtain a high order scheme whose order of consistency is four in space and four in time. In this case, as in the second order case studied in Section 2, to get the numerical solution computed with method (26) is stable, the eigenvalues of $k(-A)^{1/2}$ must be in the stability interval of the method.

6. Numerical experiments

In this Section we consider the problem described in Section 1 with initial conditions

$$u_0(x, y) = \begin{cases} \frac{(x+0.2)^3(0.2-x)^3(y+0.2)^3(0.2-y)^3}{(0.2)^{12}}, & -0.2 < x, y < 0.2, \\ 0, & \text{otherwise,} \end{cases}$$

and $v_0(x, y) = 0$, with compact support contained in the computational domain $[-1/4, 1/4] \times [-1/4, 1/4]$. The polynomial in u_0 is chosen so that $u_0 \in C^1([-1/4, 1/4] \times [-1/4, 1/4])$. These initial conditions are the same used in the numerical experiments in previous paper [2].

We set the dispersion coefficient $s^2 = 1$. For the numerical experiments we have selected three cases of coefficients α_{ij} from [5]. Table 1 displays these coefficients with the same notation used in [5].

We have numerically computed the eigenvalues of matrix B (34) from Section 5, for the α_{ij} considered, and we can conclude that they are non positive real numbers. Table 2 displays $-4\alpha_{11} - 4\alpha_{22} - 8\alpha_{12}$, the lower boundary of the minimum eigenvalue of matrix B of Section 3 and λ_{\min} the minimum eigenvalue of matrix B of Section 5 computed numerically for $N = 80$, for the three cases of coefficients α_{ij} .

Table 3
Ratio of stability.

Run	Second order FD	Fourth order FD
1.2	0.3491	0.3434
2.2	0.3900	0.4009
2.4	0.3445	0.3974

Table 4
Energy of second order and fourth order finite differences for run 1.2.

	$E_{h,2}$	$E_{h,4}$
100	1.367571822518154	1.369706858644256
200	1.369189187080928	1.369727238677717
400	1.369593766456254	1.369728558830660
800	1.369694926954860	1.369728642872906

Table 5
Energy of second order and fourth order finite differences for run 2.2.

	$E_{h,2}$	$E_{h,4}$
100	1.005656444288419	1.006932246239829
200	1.006625342563159	1.006947191598221
400	1.006867508130111	1.006948159710693
800	1.006928046352305	1.006948221342952

232 From Section 4, to ensure stability when the exponential splitting method is used, k/h has to satisfy

$$\frac{k}{h} < \frac{0.9711}{\sqrt{|\lambda_{\min}|}}.$$

233 Table 3 displays the ratio of stability $\frac{0.9711}{\sqrt{|\lambda_{\min}|}}$.

234 It can be seen in Table 3 that the stability condition for the splitting method is acceptable.

235 Now, we are going to compare the continuous energy (8) for the test problem with the discrete energy

$$E_h(t)(\mathbf{u}, \mathbf{v}) = \frac{h^2}{2} (\mathbf{v}^T \mathbf{v} - \mathbf{u}^T \mathbf{A} \mathbf{u}),$$

236 of the semi-discrete problems. We denote by $E_{h,2}(t)$ the discrete energy where matrix A is the matrix obtained in Section 3,
237 when second order finite differences are used, and $E_{h,4}(t)$ the discrete energy where matrix A is the matrix obtained in
238 Section 5, when fourth order finite differences are considered.

239 Taking into account that the function to integrate in (8) for the test problem is separable and using integration by parts,
240 it can be seen that

$$E(0) = \frac{1}{2} ((\alpha_{11} + \alpha_{22})I_1 + s^2 I_2),$$

241 where

$$I_1 = \frac{4! 5! 2^{24} 18}{(7 \dots 11)(7 \dots 13)},$$

$$I_2 = \frac{(6!)^2 2^{28}}{100 (7 \dots 13)^2}.$$

242 Tables 4–6 display the continuous energy and the discrete energies for several values of N and the three cases of coeffi-
243 cients α_{ij} selected. Likewise, energy error for the second order finite differences and the fourth-order finite differences are
244 shown in Fig. 1. It can be appreciated, from these results, the second and fourth order of the discretization of Sections 3 and
245 5, respectively.

246 Finally, in the following experiments we compare the behavior of the splitting scheme and the fourth-order four-stage
247 Runga-Kutta method when fourth order finite differences introduced in Section 5 and the energy norm $E_{h,4}(t)$ are consid-
248 ered. We measure the relative energy error $|E_{h,4}(t) - E_{h,4}(0)|/|E_{h,4}(0)|$. We set $N = M = 200$ and $k = 10^{-3}$. Fig. 2 displays
249 relative energy error for the exponential splitting integrator and the fourth-order four-stage Runga-Kutta method, for times
250 from 0 to 100, for the three selected runs.

Table 6
Energy of second order and fourth order finite differences for run 2.4.

$\epsilon_{h,2}$	$\epsilon_{h,4}$	
	$E_{h,2}$	$E_{h,4}$
1.006948225489684		
100	1.006615902030712	1.006932246239829
200	1.006866032223891	1.006947191598225
400	1.006927732266519	1.006948159710716
	1.006943105621258	1.006948221342970

Table 7
 $N = 100$, final time $T = 100$, run 2.2.

	$k = 2 \times 10^{-3}$		$k = 2 \times 10^{-4}$	
	Error	CPU	Error	CPU
Splitting	7.4541×10^{-8}	2.9122×10^2	7.2273×10^{-12}	2.8812×10^3
rk4	1.1375×10^{-5}	4.1804×10^2	2.6421×10^{-10}	4.1067×10^3

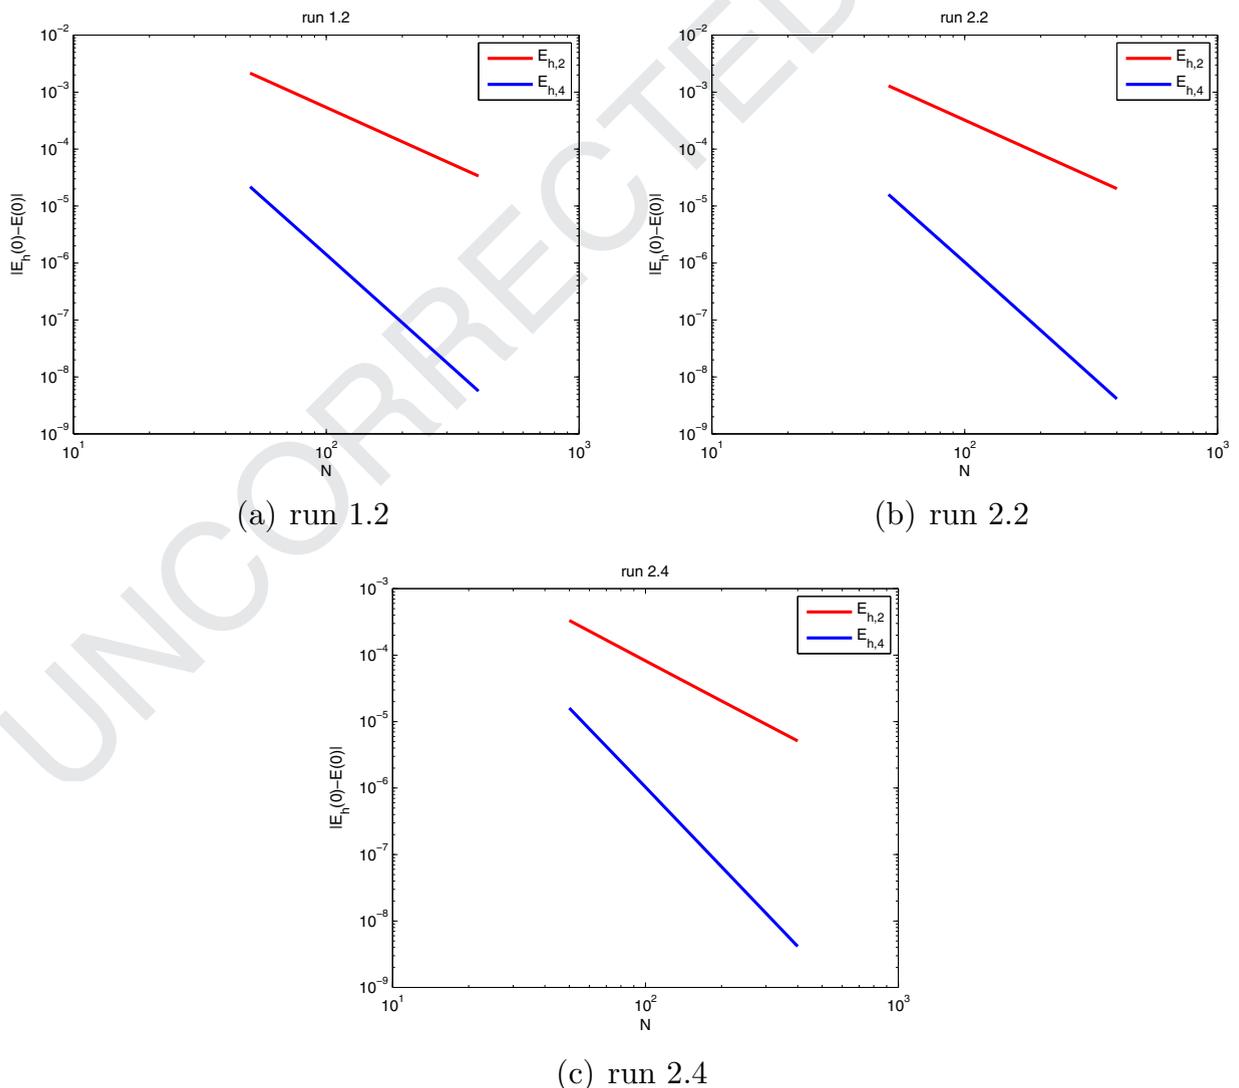


Fig. 1. Energy error for the second order finite differences and the fourth-order finite differences, for run 1.2, run 2.2 and run 2.4.

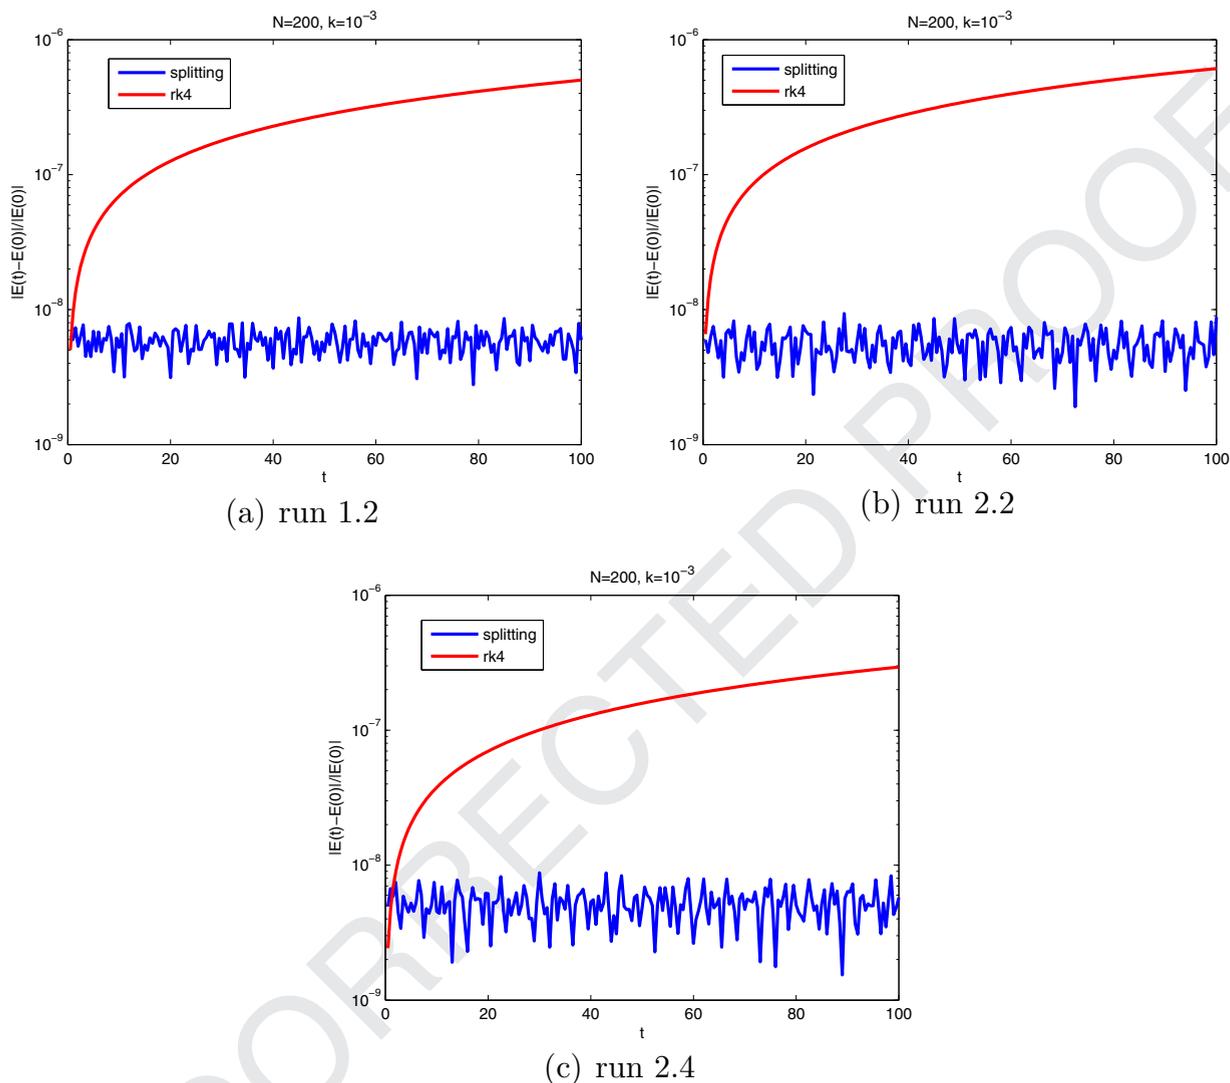


Fig. 2. Relative energy error for the exponential splitting integrator and the fourth-order four-stage Runge-Kutta method, for run 1.2, run 2.2 and run 2.4.

In the three cases, the splitting method maintains the same size error throughout the interval of time $[0, 100]$. This agrees with the fact that scheme (26) is a geometric integrator. Whereas for the Runge-Kutta method the size of the error grows when the time increases.

Lastly, we study the efficiency of the splitting scheme by comparing with the fourth-order four-stage Runge-Kutta method measuring the computational cost in terms of CPU time. For the exponential splitting integrator, if the last step in the composition (26) of $S_k^{[4]}$ for one step and the first one in $S_k^{[4]}$ for the next step are joined together, that is, $\psi_{\alpha k/2}^{[1]} \circ \psi_{\alpha k/2}^{[1]} = \psi_{\alpha k}^{[1]}$, only three times of step 1 are needed for each step in time. A similar analysis of the efficiency of the algorithms to the one done in [2] can be done here. Then, regarding the products required, for the Runge-Kutta method and the splitting method, the relation is four to three.

We have ran both algorithms for $N = 100$, with $k = 2 \times 10^{-3}$, 2×10^{-4} and for $N = 200$, with $k = 10^{-3}$, 10^{-4} and we have measured the relative energy error and the computational cost in terms of CPU time, for final time $T = 100$.

Table 8 shows the relative energy error and the CPU for the splitting method and the Runge-Kutta method. Fixed the time step k the ratio between the CPU for the Runge-Kutta method and the splitting method is 4081 for $k = 10^{-3}$ and 1.3929 for $k = 10^{-4}$, near to the expected value $4/3$. It can be seen in Fig. 3 that the splitting method is better than the Runge-Kutta method. For the same error the computational cost is smaller.

Numerical experiments confirm the good behavior in the long time integration and the efficiency of the splitting method considered.

Table 8 $N = 200$, final time $T = 100$, run 2.2.

	$k = 10^{-3}$		$k = 10^{-4}$	
	Error	CPU	Error	CPU
Splitting	8.7994×10^{-9}	2.3291×10^3	1.1304×10^{-12}	2.3056×10^4
rk4	6.1077×10^{-7}	3.2796×10^3	1.6152×10^{-11}	3.2817×10^4

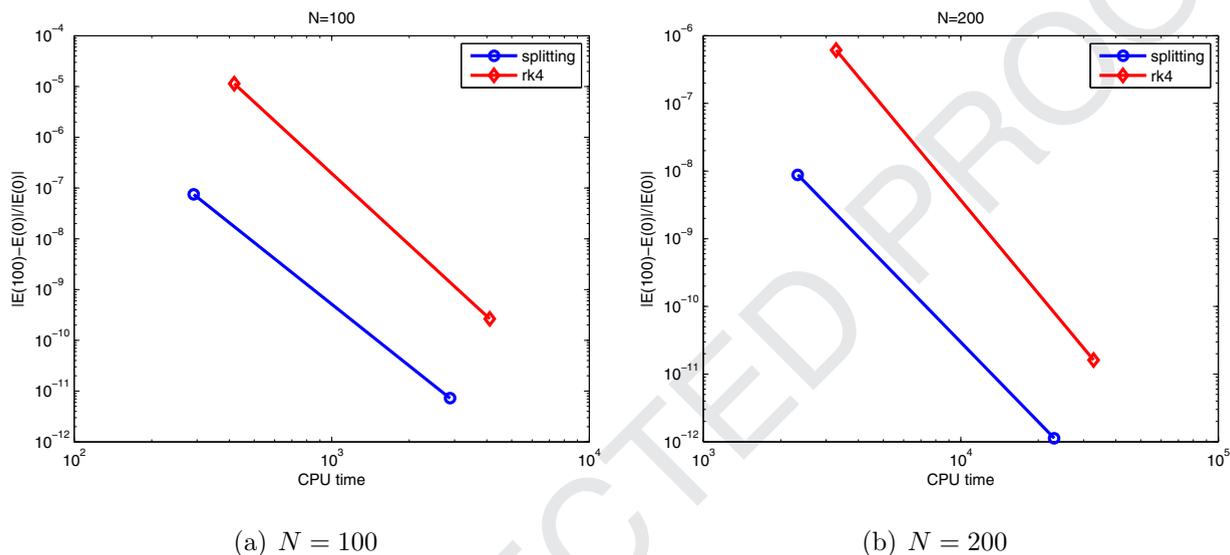


Fig. 3. Relative energy error at $T = 100$ versus CPU time for the exponential splitting integrator and the fourth-order four-stage Runge-Kutta method for run 2.2, for $N = 100$ and $N = 200$.

268 **Uncited reference**

269 [19].

270 Acknowledgments

271 The author wishes to thank Isaías Alonso-Mallo for his comments and his constructive remarks, which have enhanced
 272 the presentation of this paper. This work has obtained financial support from project MTM2015-66837-P of Ministerio de
 273 Economía y Competitividad.

274 References

- 275 [1] I. Alonso-Mallo, B. Cano, M.J. Moreta, The stability of rational approximations of cosine functions on hilbert spaces, *Appl. Numer. Math.* 59 (1) (2009)
 276 21–38.
 277 [2] I. Alonso-Mallo, A.M. Portillo, Time exponential splitting technique for the Klein–Gordon equation with Hagstrom–Warburton high-order absorbing
 278 boundary conditions, *J. Comput. Phys.* 311 (2016) 196–212.
 279 [3] E. Bécache, P. Joly, On the analysis of Bérenger's perfectly matched layers for Maxwell equations, *M2AN* 36 (1) (2002) 87–120.
 280 [4] E. Bécache, S. Fauqueux, P. Joly, Stability of perfectly matched layers, group velocities and anisotropic waves, *J. Comput. Phys.* 188 (2003) 399–433.
 281 [5] E. Bécache, D. Givoli, T. Hagstrom, High-order absorbing boundary conditions for anisotropic and convective wave equations, *J. Comput. Phys.* 229
 282 (2010) 1099–1129.
 283 [6] S. Blanes, F. Casas, A. Murua, Splitting and composition methods in the numerical integration of differential equations, *Bol. Soc. Esp. Mat. Apl.* 45
 284 (2008) 89–145.
 285 [7] S. Blanes, F. Casas, A. Murua, On the linear stability of splitting methods, *Found. Comp. Math.* 8 (2008) 357–393.
 286 [8] B. Düring, M. Fournié, A. B. Gal, High-order ADI schemes for convection-diffusion equations with mixed derivative terms, *Lect. Notes Comput. Sci. Eng.*
 287 95 (2014) 217–226.
 288 [9] C. Grossmann, H. Roos, M. Stynes, *Numerical Treatment of Partial Differential Equations*, Springer, 2007.
 289 [10] E. Hairer, G. Wanner, C. Lubich, *Geometric Numerical Integration*, Springer, 2006.
 290 [11] K. Helbig, L. Thomsen, 75-plus years of anisotropy in exploration and reservoir seismics: a historical review of concepts and methods, *Geophysics* 70
 291 (2005) 9–23.
 292 [12] C. Hendricks, M. Ehrhardt, M. Günther, High-order ADI schemes for diffusion equations with mixed derivatives in the combination technique, *Appl.*
 293 *Numer. Math.* 101 (2016) 36–52.
 294 [13] K.J.i. Hout, B.D. Welfert, Stability of ADI schemes applied to convection-diffusion equations with mixed derivative terms, *Appl. Numer. Math.* 57 (2007)
 295 19–35.
 296 [14] K.J.i. Hout, B.D. Welfert, Unconditional stability of second-order ADI schemes applied to multi-dimensional diffusion equations with mixed derivative
 297 terms, *Appl. Numer. Math.* 59 (2009) 677–692.

- 298 [15] K.J.i. Hout, S. Foulon, ADI finite difference schemes for option pricing in the Heston model with correlation, *Int. J. Numer. Anal. Mod.* 7 (2010) 303–320.
299 [16] I. Kra, S.R. Simanca, On circulant matrices, *Notices Am. Math. Soc.* 59 (2012) 368–377.
300 [17] G. Kreiss, K. Duru, Discrete stability of perfectly matched layers for anisotropic wave equations in first and second order formulation, *BIT Numer. Math.*
301 53 (2013) 641–663.
302 [18] T. Lara, Circulant Matrices, *Divulg. Mat.* 9 (1) (2001) 85–102.
303 [19] R.I. McLachlan, On the numerical integration of ordinary differential equations by symmetric composition methods, *SIAM J. Sci. Comput.* 16 (1995)
304 151–168.
305 [20] R.I. McLachlan, R. Quispel, Splitting methods, *Acta Numer.* 11 (2002) 341–434.
306 [21] K.C. Meza-Fajardo, A.S. Papageorgiou, A nonconvolutional, split-field, perfectly matched layer for wave propagation in isotropic and anisotropic elastic
307 media: stability analysis, *Bull. Seism. Soc. Am.* 98 (2008) 1811–1836.
308 [22] J.M. Sanz-Serna, M.P. Calvo, *Numerical Hamiltonian Problems*, Chapman and Hall, London, 1994.
309 [23] M. Suzuki, Fractal decomposition of exponential operators with applications to many-body theories and monte carlo simulations, *Phys. Lett. A* 146
310 (1990) 319–323.
311 [24] I. Tsvankin, J. Gaiser, V. Grechka, M. van der Baan, L. Thomsen, Seismic anisotropy in exploration and reservoir characterization: an overview, *Geo-*
312 *physics* 75 (2010) 15–29.
313 [25] H. Yoshida, Construction of higher order symplectic integrators, *Phys. Lett. A* 150 (1990) 262–268.
314 [26] M. Yousuf, Efficient l-stable method for parabolic problems with application to pricing american options under stochastic, *Appl. Math. Comput.* 213
315 (2009) 121–136.