

A Novel Disjunctive Model for the Simultaneous Optimization and Heat Integration

Natalia Quirante^a, José A. Caballero^{a,*} and Ignacio E. Grossmann^b.

^a Institute of Chemical Processes Engineering. University of Alicante, PO 99, E-03080 Alicante, Spain.

^b Department of Chemical Engineering. Carnegie Mellon University, 5000 Forbes Ave., Pittsburgh, PA 15213, USA.

*Corresponding author: caballer@ua.es, Tel: +34 965902322. Fax: +34 965903826.

E-mail addresses: natalia.quirante@ua.es (N. Quirante), caballer@ua.es (J.A. Caballero), grossmann@cmu.edu (I.E. Grossmann)

Abstract

This paper introduces a new disjunctive formulation for the simultaneous optimization and heat integration of systems with variable inlet and outlet temperatures in process streams as well as the possibility of selecting and using different utilities. The starting point is the original compact formulation of the Pinch Location Method, however, instead of approximating the “maximum” operator with smooth, but non-convex functions, these operators are modeled by means of a disjunction. The new formulation has shown to have equal or lower relaxation gap than the best alternative reformulation, thus reducing computational time and numerical problems related to non-convex approximations.

Keywords: heat integration, variable temperatures, disjunctive model, simultaneous optimization.

1. Introduction

An important factor in determining the optimal design of a chemical process is heat integration because energy consumption contributes significantly to the total cost of a process. Therefore, minimizing energy consumption, minimizing energy losses, and increasing the energy efficiency increases the efficiency and the economic benefits of a chemical plant.

The most important technique to decrease energy consumption is through the implementation of heat exchanger networks. The concept of heat integration making the concept of pinch analysis was introduced in 1978 by Linnhoff and Flower (1978). The idea was based on determining the minimum utility requirements of a process, and identifying the maximum possible grade of heat recovery as a function of the minimum temperature difference inside the heat exchanger network. In 1983, Linnhoff and Hindmarsh (1983) showed that it is possible to save a significant part of the energy required by a plant.

A detailed review of heat integration and heat integration alternatives is out of the scope of this paper. A simple search using the Scopus Database (SCOPUS Database, 2016) using the keywords «Heat Integration» yields more than 5400 results in just the last 5 years, and more than 1100 in the specific area of Chemical Engineering. Comprehensive information about the initial advances after the pinch introduction can be found in the reviews by Gundersen and Naess (1988) or Jezowski (1994a, 1994b). A comprehensive review with annotated bibliography that covers all the advances in the 20th century was due to Furman and Sahinidis (2002). A general overview of the state of the art at the end of 20th century in process engineering including heat integration can be found in the work by Grossmann et al. (1999) or Dunn and El-Halwagi (2003). More recent reviews including the most relevant advances in the last years are those by Morar and Agachi (2010), and Klemeš and Kravanja (2013). With the focus on heat exchanger networks retrofit, the recent review by Sreepathi and Rangaiah (2014) is also interesting. The importance of process integration in general and the combination of Heat Integration with some particular subsystems has also received considerable attention. For example, Ahmetovic reviewed the literature for water and energy integration (Ahmetović et al., 2015; Ahmetović & Kravanja, 2013). Wechsung et al. (2011) and Onishi et al. (2014a) introduced the concept of heat and mechanical power integration. Fernández et al. (2012) presented a comprehensive review of energy integration in batch processes, Quirante and Caballero

47 (2016) proposed the simultaneous optimization, heat integration, and life cycle assessment (LCA) for the
48 optimization of a very large scale sour water stripping plant.

49 A heat integrated flowsheet can be obtained using mainly two different approaches: Sequential or simultaneous
50 strategy. In the first stage of the sequential strategy, the process configuration and the operating conditions are
51 optimized assuming that all heating and cooling needs are supplied by utilities. In the second stage, with the
52 information of the optimal stream conditions, heat integration is performed and the heat exchanger network
53 (HEN) is designed (Ahmad et al., 1990; Linhoff & Hindmarsh, 1983; Linhoff, 1993; Linhoff & Ahmad,
54 1990).

55 In the simultaneous strategy, the heat integration and the flowsheet synthesis are performed simultaneously.
56 Some works have demonstrated that the simultaneous optimization and heat integration can achieve important
57 savings in the total cost of a process, compared to the sequential strategy (Duran & Grossmann, 1986; Lang et
58 al., 1988). In problems with specific characteristics like some subsystems or in small or medium size problems
59 (Caballero & Grossmann, 2006; Onishi et al., 2014b) it is possible to use a superstructure (Yee & Grossmann,
60 1990; Yee et al., 1990) and simultaneously obtaining the optimal operating conditions and the heat exchanger
61 network. However, in large problems the size of the model is so large that usually it cannot be solved with the
62 state of the art NLP/MINLP solvers. However, in many cases, the energy costs dominate the investment costs or
63 we expect that for a given minimum energy consumption target, the investment in the different alternatives do
64 not have an important influence in the optimal operating conditions of the optimized flowsheet. In other words,
65 we simultaneously optimize the operating conditions and the energy consumption but without considering the
66 actual structure of the heat exchanger network. The information required to predict the minimum energy target
67 for a given set of hot and cold streams can be obtained from the “Problem Table” (Linnhoff, 1993) or using the
68 transshipment model (Papoulias & Grossmann, 1983). In both approaches, it is necessary to introduce the
69 concept of «Temperature intervals». This is adequate for ‘a posteriori’ heat integration or if the optimization is
70 performed using a derivative-free solver (Corbetta et al., 2016). However, the state of the art gradient based
71 NLP/MINLP solvers require smooth functions. If the process stream temperatures are not constant some
72 temperature intervals can disappear or other new ones can appear, which mathematically translates into
73 discontinuities, and therefore into points of non-differentiability.

74 To overcome the numerical difficulties related to the temperature intervals, Duran and Grossmann (1986)
75 presented the «Pinch Location Method» (PLM). The next section presents an overview of PLM. Even though the
76 PLM does not rely on the temperature interval concept, the final model includes the “maximum” operator that
77 introduces non-differentiabilities. In the original work, Duran and Grossmann proposed to approximate the max
78 operator with smooth functions. This approach avoids the non-differentiability problem, and reduces the problem
79 into an NLP. However, the smooth approximation is non-convex and its numerical behavior depends on
80 parameters in the approximation function. Later, Grossmann et al. (1998) presented a disjunctive model that
81 overcomes all previous limitations at the cost of introducing integer variables. Alternatively, Navarro-Amorós et
82 al. (2013) presented an MI(N)LP model that maintains the concept of temperature interval. They assumed a
83 maximum number of temperature intervals and dynamically assign process temperatures to each interval. The
84 numerical test presented by the authors showed that the numerical performance is similar to the disjunctive
85 formulation of the PLM. However, the number of constraints and binary variables can be orders of magnitude
86 larger.

87 In the rest of the paper we first present an overview of the Pinch Location Method. Then we introduce a novel
88 disjunctive reformulation that has better relaxation gap than the disjunctive model presented by Grossmann et al.
89 (1998) and a similar number of variables and equations. A set of numerical test illustrates the performance of the
90 novel approach in examples with different complexity. Finally, we finish with some conclusions.

91

92 **2. The pinch location method. Overview**

93 In the following paragraphs, we present an overview of the Pinch Location Method. It does not pretend to be a
94 comprehensive description. Notwithstanding, the novel disjunctive formulation is based on it and we consider of

95 interest to introduce the more relevant aspects. For further details, the interested reader is referred to the original
 96 work (Duran & Grossmann, 1986).

97 The pinch analysis assumes that the heat flow of a process stream can be considered constant. If this is not the
 98 case in the entire range of temperatures then it is possible to approximate the process streams by different
 99 streams with constant heat flows (piecewise linear approximation). Under these conditions, the pinch point
 100 occurs always at the inlet temperature of a process stream. Duran and Grossmann (1986) observed that for a
 101 given Heat Recovery Approach Temperature (HRAT or ΔT_{min}), if we check all the candidate to pinch point
 102 temperatures, the correct one is the temperature with the largest heating and cooling utilities among all the
 103 candidates. Fig. 1 with data from Table 1 shows an illustrative example.

104

105

Table 1. Stream data for example.

Streams	Tin (°C)	Tout (°C)	F (kW/°C)
H1 (hot)	170	70	3.0
H2 (hot)	150	70	1.5
C1 (cold)	80	140	4.0
C2 (cold)	60	170	2.0

$\Delta T_{min} = 20 \text{ }^\circ\text{C}$

106

107

108

<Insert Fig. 1>

109 **Fig. 1. Utilities needed for different pinch stream candidates (— Hot - - - Cold). (a) Pinch candidate H1.**
 110 **(b) Pinch candidate H2. (c) Pinch candidate C1. (d) Pinch candidate C2.**

111

112 Mathematically, the previous result can be written as follows:

$$Q_H = \max_{p \in P} (Q_H^p)$$

$$Q_C = \max_{p \in P} (Q_C^p)$$
(1)

113 Where P is the index set of all the hot and cold process streams (pinch candidates). $i = 1 \dots n_H, j = 1 \dots n_C$; and
 114 Q_H^p, Q_C^p are the heating and cooling utilities required from each pinch candidate. Using an energy balance, Eq.
 115 (1) can be written in terms only of heating (or cooling) utilities:

$$Q_C = \Omega + Q_H$$
(2)

116 Where Ω is the total heat surplus.

$$\Omega = \sum_{i \in \text{Hot}} F_i (T_i^{\text{in}} - T_i^{\text{out}}) - \sum_{j \in \text{Cold}} f_j (t_j^{\text{out}} - t_j^{\text{in}})$$
(3)

117 At this point is very important to note that all the temperatures are “shifted temperatures”:

$$\left. \begin{aligned} T_i^{\text{in}} &= Tin_i - \frac{\Delta T_{min}}{2} \\ T_i^{\text{out}} &= Tout_i - \frac{\Delta T_{min}}{2} \end{aligned} \right\} i \text{ is a hot stream}$$

$$\left. \begin{aligned} t_j^{\text{in}} &= tin_j + \frac{\Delta T_{min}}{2} \\ t_j^{\text{out}} &= tout_j + \frac{\Delta T_{min}}{2} \end{aligned} \right\} j \text{ is a cold stream}$$
(4)

$$T^p \begin{cases} T_i^{in} - \frac{\Delta T_{min}}{2} & \text{if } p \text{ is a hot stream } i \\ t_j^{in} + \frac{\Delta T_{min}}{2} & \text{if } p \text{ is a cold stream } j \end{cases}$$

118 where T_{in} , T_{out} , t_{in} , t_{out} are the actual stream process temperatures. Note that T^p is also referred to the shifted
119 scale.

120 From Eq. (1) and (2), the criterion for the pinch location reduces to:

$$\begin{aligned} Q_H &= \max_{p \in P} (Q_H^p) \\ Q_C &= \Omega + Q_H \end{aligned} \quad (5)$$

121 It is still necessary to get an explicit equation to calculate the term Q_H^p for each pinch candidate in terms of heat
122 flows and temperatures.

123 Duran and Grossmann (1986) noted that in order to calculate Q_H^p it is necessary to take into account only the
124 process streams above the pinch because there is not net heat transfer across the pinch. Therefore, considering an
125 energy balance above the pinch we can write:

$$Q_H^p = QA_C^p - QA_H^p \quad (6)$$

126 where QA_C^p and QA_H^p are the total cold and heat content, respectively, above the pinch of the process.

127 To calculate QA_H^p (or QA_C^p) in terms of heat flows and temperatures, we only need to calculate the contribution of
128 each hot (or cold) stream above the pinch.

129 For example, for a hot stream i :

- 130 - If the inlet and outlet temperatures are greater than the inlet temperature of the pinch candidate p
131 ($T_i^{in} \geq T_i^{out} \geq T^p$) then the heat content above the pinch is $F_i(T_i^{in} - T_i^{out})$.
- 132 - If the stream crosses the pinch ($T_i^{in} \geq T^p \geq T_i^{out}$) then the heat content above the pinch is $F_i(T_i^{in} -$
133 $T^p)$.
- 134 - If the stream is below the pinch ($T^p \geq T_i^{in} \geq T_i^{out}$) then there is no heat content above the pinch.

135 Duran and Grossmann (1986) showed that the following expression captures the three cases:

$$QA_i^p = F_i[\max(0, T_i^{in} - T^p) - \max(0, T_i^{out} - T^p)] \quad (7)$$

136 Following a similar approach, the heat content above the pinch for a cold stream j can be calculated by the
137 following expression:

$$QA_j^p = f_j[\max(0, t_j^{out} - T^p) - \max(0, t_j^{in} - T^p)] \quad (8)$$

138 Note that lower case letters are used for cold streams and capital letters for hot streams.

139 The final model for the simultaneous optimization and heat integration can then be written as follows:

$$\min f(x) + C_H Q_H + C_C Q_C$$

$$s. t. h(x) = 0$$

$$g(x) \leq 0$$

$$\begin{aligned} Q_H \geq \sum_{j \in Cold} f_j [\max(0, t_j^{out} - T^p) - \max(0, t_j^{in} - T^p)] \\ - \sum_{i \in Hot} F_i [\max(0, T_i^{in} - T^p) - \max(0, T_i^{out} - T^p)] \quad p \in P \end{aligned} \quad (9)$$

$$Q_C = Q_H + \sum_{i \in Hot} F_i (T_i^{in} - T_i^{out}) - \sum_{j \in Cold} f_j (t_j^{out} - t_j^{in})$$

$$Q_H, Q_C, F_i, f_j \geq 0$$

140

141 3. Pinch location method. Disjunctive formulation

142 The formulation in Eq. (9) has the difficulty of the presence of ‘max’ operators that are non-differentiable. Duran
 143 and Grossmann (1986) proposed to use a smooth approximation (see also (Balakrishna & Biegler, 1992)). In that
 144 case, the model can be solved using state-of-the-art NLP solvers. The major problem with this approach is that
 145 the smooth approximations are highly non-convex and depend on at least one small parameter, which must be
 146 fixed by the user, and eventually can also introduce numerical conditioning problems.

147 To solve all the previous drawbacks, Grossmann et al. (1998) proposed a disjunctive formulation.

148 The basic idea is to explicitly take into account for each combination of process stream with pinch candidate the
 149 three possibilities: the stream is above the pinch, it crosses the pinch or it is below the pinch. The model also
 150 takes explicitly into account isothermal streams. The model was solved as an MI(N)LP model using a big-M
 151 reformulation. If the stream heat flows (F_i, f_j) are constant, the resulting model (at least the part related with the
 152 heat integration) is linear and can be easily added to any flowsheet model.

153 In this paper, instead of explicitly dealing with the positions of the different streams in relation to the pinch, we
 154 use a disjunction to deal directly with the ‘max’ operators in the model. Let us first consider the disjunctive
 155 model of the following expression and its reformulation to an MILP model using the hull reformulation:

$$\phi = \max(0, c^T x) \quad (10)$$

156 In Eq. (10) c is a vector of known coefficients and x is a vector of variables. An equivalent disjunctive
 157 formulation for the previous equation can be written as follows:

$$\left[\begin{array}{l} Y \\ c^T x \geq 0 \\ \phi = c^T x \\ \underline{x} \leq x \leq \bar{x} \end{array} \right] \vee \left[\begin{array}{l} \neg Y \\ c^T x \leq 0 \\ \phi = 0 \\ \underline{x} \leq x \leq \bar{x} \end{array} \right] \quad (11)$$

$$Y \in \{True, False\}$$

158 If the Boolean variable takes the value «True» the first term in the disjunction is enforced and ϕ must be positive,
 159 otherwise ϕ is equal to zero.

160 The hull reformulation (Grossmann & Trespalacios, 2013) of the previous model –Eq. (11)- is as follows:

$$\begin{aligned} x &= x_1 + x_2 \\ \phi &= \phi_1 + \phi_2 \\ c^T x_1 &\geq 0 & c^T x_2 &\leq 0 \\ \phi_1 &= c^T x_1 & \phi_2 &= 0 \\ y \underline{x} &\leq x_1 \leq y \bar{x} & (1-y) \underline{x} &\leq x_2 \leq (1-y) \bar{x} \end{aligned} \quad (12)$$

161 The model in Eq. (12) introduces new variables and equations. However, this formulation can be simplified
 162 taking into account that:

- 163 • Variable ϕ_2 is fixed to zero and, therefore, it can be removed.
- 164 • The particular value of the x_2 variables is not relevant to the problem (they are not used in the model).
- 165 It is possible then to lump the term $c^T x_2$ in a single variable:

$$s = -c^T x_2; \quad s \geq 0 \quad (13)$$

166 The minus sign is only to force the variable s to be non-negative.

167 • It is possible to write the model given in Eq. (12) in terms of the original variables x and the new
 168 variable s , without defining new variables. To that end, we multiply the first equation in Eq. (12) by
 169 the coefficients c and remove variables x_1 and x_2 :

$$x = x_1 + x_2 \rightarrow c^T x = c^T x_1 + c^T x_2 \rightarrow c^T x = c^T x_1 - s \rightarrow c^T x_1 = c^T x + s \quad (14)$$

170 • The last equations in Eq. (12) that force the variables to be zero if the binaries are zero, can be written
 171 in terms of the original x and s variables.

172 The final hull reformulation can then be written as follows:

$$\begin{aligned} \phi &= c^T x + s \\ y\phi^{LO} &\leq \phi \leq y\phi^{UP} \\ (1-y)s^{LO} &\leq s \leq (1-y)s^{UP} \\ s &\geq 0; \phi \geq 0 \end{aligned} \quad (15)$$

173 Note that good upper and lower bounds for the s and ϕ variables can be easily obtained from the bounds of x
 174 variables and c values.

175 It is interesting to note that the Eq. (15) can also be obtained from the “max” operator formulated as an
 176 optimization problem with complementarity constrains (Biegler, 2010), and re-writing the complementarity
 177 constraint as a disjunction (or in terms of binary variables).

$$\phi = \max(0, c^T x) \Rightarrow \begin{cases} \phi = c^T x + s \\ 0 \leq \phi \perp s \geq 0 \end{cases} \Rightarrow \begin{cases} \phi = c^T x + s \\ [Y] \\ [s = 0] \end{cases} \vee \begin{cases} -Y \\ [\phi = 0] \\ s \geq 0; \phi \geq 0 \end{cases} \quad (16)$$

178 The hull reformulation of the disjunctive model in Eq. (16) yields the equations in Eq. (15).

179 Taking all the previous equations into account, the final model for the simultaneous optimization and heat
 180 integration can be written as follows:

$$\begin{aligned}
& \min f(x) + C_H Q_H + C_C Q_C \\
& \text{s. t. } h(x) = 0 \\
& g(x) \leq 0 \\
& Q_C = Q_H + \sum_{i \in \text{Hot}} F_i (T_i^{\text{in}} - T_i^{\text{out}}) - \sum_{j \in \text{Cold}} f_j (t_j^{\text{out}} - t_j^{\text{in}}) \\
& Q_H \geq \sum_{j \in \text{Cold}} f_j [\phi t_{j,p}^{\text{out}} - \phi t_{j,p}^{\text{in}}] - \sum_{i \in \text{Hot}} F_i [\phi T_{i,p}^{\text{in}} - \phi T_{i,p}^{\text{out}}] \quad p \in P \\
& \phi t_{j,p}^{\text{out}} = t_j^{\text{out}} - T^p + st_{j,p}^{\text{out}} \quad j \in \text{Cold}; p \in P \\
& \phi t_{j,p}^{\text{in}} = t_j^{\text{in}} - T^p + st_{j,p}^{\text{in}} \quad j \in \text{Cold}; p \in P \\
& \phi T_{i,p}^{\text{in}} = T_i^{\text{in}} - T^p + sT_{i,p}^{\text{in}} \quad i \in \text{Hot}; p \in P \\
& \phi T_{i,p}^{\text{out}} = T_i^{\text{out}} - T^p + sT_{i,p}^{\text{out}} \quad i \in \text{Hot}; p \in P \\
& st_{j,p}^{\text{in}} \leq \max(0, -\underline{t_j^{\text{in}}} + \overline{T^p}) (1 - yc_j^{\text{in}}) \\
& \phi t_{j,p}^{\text{in}} \leq \max(0, \overline{t_j^{\text{in}}} - \underline{T^p}) yc_j^{\text{in}} \\
& st_{j,p}^{\text{out}} \leq \max(0, -\underline{t_j^{\text{out}}} + \overline{T^p}) (1 - yc_j^{\text{out}}) \\
& \phi t_{j,p}^{\text{out}} \leq \max(0, \overline{t_j^{\text{out}}} - \underline{T^p}) yc_j^{\text{out}} \\
& sT_{i,p}^{\text{in}} \leq \max(0, -\underline{T_i^{\text{in}}} + \overline{T^p}) (1 - yh_i^{\text{in}}) \\
& \phi T_{i,p}^{\text{in}} \leq \max(0, \overline{T_i^{\text{in}}} - \underline{T^p}) yh_i^{\text{in}} \\
& sT_{i,p}^{\text{out}} \leq \max(0, -\underline{T_i^{\text{out}}} + \overline{T^p}) (1 - yh_i^{\text{out}}) \\
& \phi T_{i,p}^{\text{out}} \leq \max(0, \overline{T_i^{\text{out}}} - \underline{T^p}) yh_i^{\text{out}} \\
& Q_H, Q_C \geq 0 \\
& F_i, \phi T_{i,p}^{\text{in}}, \phi T_{i,p}^{\text{out}}, sT_{i,p}^{\text{in}}, sT_{i,p}^{\text{out}} \geq 0 \quad i \in \text{Hot}; p \in P \\
& f_j, \phi t_{j,p}^{\text{in}}, \phi t_{j,p}^{\text{out}}, st_{j,p}^{\text{in}}, st_{j,p}^{\text{out}} \geq 0 \quad j \in \text{Cold}; p \in P \\
& yc_j^{\text{in}}, yc_j^{\text{out}} \in \{0,1\} \quad j \in \text{Cold}; p \in P \\
& yh_i^{\text{in}}, yh_i^{\text{out}} \in \{0,1\} \quad i \in \text{Hot}; p \in P
\end{aligned} \tag{17}$$

181 In the previous model, the set *Hot* makes reference to the hot streams, the set *Cold* to the cold streams. The
182 variables *st*, *sT* are equivalent to the ‘*s*’ variable in Eq. (15) and ϕt , ϕT are equivalent to the ϕ variable in Eq.
183 (15). The lower bound of a variable is indicated by a line under that variable, and an upper bound by a line over
184 the variable. Variables *yc* and *yh* are binary variables related to each one of the max operators in the model.

185 Some final remarks: Based on the bounds of *st*, *sT* and ϕt , ϕT variables, it is possible to fix a priori some
186 variables. For example if:

$$-\underline{t_j^{\text{in}}} + \overline{T^p} \leq 0 \text{ then } st_{j,p}^{\text{in}} = 0 \text{ and } yc_j^{\text{in}} = 1$$

187 The novel disjunctive reformulation has fewer Boolean (binary) variables than the disjunctive version presented
188 by Grossmann et al. (1998). The disjunctive formulation proposed by Grossmann et al. (1998) introduces 3
189 Boolean variables for each combination of hot or cold streams and pinch candidate (the stream is above, crosses

190 or is under the pinch candidate). In contrast, in the present model only two binary variables are needed for each
 191 process stream pinch candidate. The total number of binary variables is then:

$$\begin{aligned} \#Binaries (Grossmann et al. (1998)) &= (3n_H + 3n_C)(n_H + n_C) = 3(n_H + n_C)^2 \\ \#Binaries (Present work) &= (2n_H + 2n_C)(n_H + n_C) = 2(n_H + n_C)^2 \end{aligned} \quad (18)$$

192 However, the total number of variables is larger, because we must add the ‘s’ variables. But, the total number of
 193 constraints is also lower in the new formulation.

194 Notwithstanding, the most relevant aspect is that the numerical test shows that the new formulation has always
 195 smaller relaxation gaps than the original Grossmann et al. (1998) model.

196

197 3.1. Extension to isothermal streams and multiple utilities

198 The inclusion in the model of isothermal streams can be done with at least two different approaches. The first
 199 one consists of using a fictitious 1 °C of variation and calculating the equivalent heat flow assuming that
 200 ‘dummy’ temperature variation. In the second one, we maintain the isothermal condition of the stream. Then the
 201 heat added or removed to or from the system can be calculated as:

$$Q_{isothermal} = \lambda m \quad (19)$$

202 where λ is the specific heat associated with the change of phase, and m is the mass flow rate of the stream. An
 203 isothermal stream cannot cross the pinch, therefore to calculate the heat content above the pinch (QA) of the
 204 isothermal stream, we can use the following disjunction:

$$\left[\begin{array}{l} Y^{iso} \\ QA^{iso} = \lambda m \\ T^{iso} \geq T^p \end{array} \right] \vee \left[\begin{array}{l} \neg Y^{iso} \\ QA^{iso} = 0 \end{array} \right] \quad (20)$$

205 where Y^{iso} is a Boolean variable that takes the value of True if the temperature of the isothermal stream is greater
 206 than the pinch candidate temperature. The hull reformulation of the previous disjunction is as follows:

$$\begin{aligned} QA^{iso} &= \lambda m \cdot y^{iso} \\ T^p - T^{iso} &\leq (\overline{T^p} - \underline{T^{iso}}) y^{iso} \end{aligned} \quad (21)$$

207 The final model considering isothermal streams can be written as follows:

$$\begin{aligned} \min \quad & f(x) + C_H Q_H + C_C Q_C \\ \text{s. t.} \quad & h(x) = 0 \\ & g(x) \leq 0 \\ & Q_C = Q_H + \sum_{i \in Hot} F_i (T_i^{in} - T_i^{out}) + \sum_{i \in Hiso} \lambda_i m_i - \sum_{j \in Cold} f_j (t_j^{out} - t_j^{in}) - \sum_{j \in Ciso} \lambda_j m_j \\ & Q_H \geq \sum_{j \in Cold} f_j [\phi t_{j,p}^{out} - \phi t_{j,p}^{in}] + \sum_{j \in Ciso} \lambda_j m_j y c_j^{iso} \\ & \quad - \sum_{i \in Hot} F_i [\phi T_{i,p}^{in} - \phi T_{i,p}^{out}] - \sum_{i \in Hiso} \lambda_i m_i y h_i^{iso} \quad p \in P \\ & T^p - T_i^{iso} \leq (\overline{T^p} - \underline{T_i^{iso}}) y h_i^{iso} \quad p \in P; i \in Hiso \\ & T^p - t_j^{iso} \leq (\overline{T^p} - \underline{t_j^{iso}}) y c_j^{iso} \quad p \in P; j \in Ciso \\ & \phi t_{j,p}^{out} = t_j^{out} - T^p + s t_{j,p}^{out} \quad j \in Cold; p \in P \\ & \phi t_{j,p}^{in} = t_j^{in} - T^p + s t_{j,p}^{in} \quad j \in Cold; p \in P \end{aligned} \quad (22)$$

$$\phi T_{i,p}^{in} = T_i^{in} - T^p + sT_{i,p}^{in} \quad i \in Hot; p \in P$$

$$\phi T_{i,p}^{out} = T_i^{out} - T^p + sT_{i,p}^{out} \quad i \in Hot; p \in P$$

$$st_{j,p}^{in} \leq \max(0, -\underline{t}_j^{in} + \overline{T^p})(1 - yc_j^{in})$$

$$\phi t_{j,p}^{in} \leq \max(0, \overline{t}_j^{in} - \underline{T^p})yc_j^{in}$$

$$st_{j,p}^{out} \leq \max(0, -\underline{t}_j^{out} + \overline{T^p})(1 - yc_j^{out})$$

$$\phi t_{j,p}^{out} \leq \max(0, \overline{t}_j^{out} - \underline{T^p})yc_j^{out}$$

$$sT_{i,p}^{in} \leq \max(0, -\underline{T}_i^{in} + \overline{T^p})(1 - yh_i^{in})$$

$$\phi T_{i,p}^{in} \leq \max(0, \overline{T}_i^{in} - \underline{T^p})yh_i^{in}$$

$$sT_{i,p}^{out} \leq \max(0, -\underline{T}_i^{out} + \overline{T^p})(1 - yh_i^{out})$$

$$\phi T_{i,p}^{out} \leq \max(0, \overline{T}_i^{out} - \underline{T^p})yh_i^{out}$$

$$Q_H, Q_C \geq 0$$

$$F_i, \phi T_{i,p}^{in}, \phi T_{i,p}^{out}, sT_{i,p}^{in}, sT_{i,p}^{out} \geq 0 \quad i \in Hot; p \in P$$

$$f_j, \phi t_{j,p}^{in}, \phi t_{j,p}^{out}, st_{j,p}^{in}, st_{j,p}^{out} \geq 0 \quad j \in Cold; p \in P$$

$$yc_j^{in}, yc_j^{out} \in \{0,1\} \quad j \in Cold; p \in P$$

$$yh_i^{in}, yh_i^{out} \in \{0,1\} \quad i \in Hot; p \in P$$

208 Note that in Eq. (22) the sets *Hot* and *Cold* make reference to the non-isothermal process streams, and the sets
209 *Hiso* and *Ciso* refer to the hot and cold isothermal streams.

210 The introduction of multiple utilities is straightforward. In this case, the inlet and outlet temperatures are known
211 and the variable is the heat flow (f or F) in non-isothermal streams and the mass flowrate in the case of
212 isothermal streams.

213

214 4. Case studies: Heat integration examples

215 In this paper, a series of examples are presented to illustrate the performance of the method. Examples include:
216 fixed and variable stream temperatures (MILP); variable stream temperatures with a penalty function that
217 simulates the behavior of a system; simultaneous process optimization and heat integration using a hybrid
218 simulation-optimization approach, where the flowsheet is solved by a commercial process simulator, and the
219 heat integration model is in equation form; and variable stream temperatures with addition of multiple utilities.

220 Calculations of fixed and variable stream temperature problems were carried out in GAMS (Rosenthal, 2012).
221 Calculations of the simultaneous process optimization and heat integration problem were performed in
222 TOMLAB-MATLAB (Holmström, 1999) and the simulations were performed on Aspen HYSYS v.8.4.
223 (Hypotech, 1995 - 2011). The computations were performed in a computer with a 3.60 GHz Intel® Core™ i7
224 Processor and 8 GB of RAM under Windows 7.

225 All the problems were solved for a minimum heat recovery approach temperature (ΔT_{min}) of 10°C.

226

227 4.1. Case study 1: Process with fixed stream conditions (MILP)

228 The first example solved (test problem 1) consists of a problem in which heat flow rates, and inlet and outlet
 229 temperatures are known and constant. The objective consists of determining the minimum utility costs. This
 230 problem has to be solved as a mixed integer linear problem (MILP) because it includes continuous and binary
 231 variables and all the model equations are linear. Data corresponding to test problem 1 are shown in Table 2.

232 **Table 2. Data for test problem 1 (fixed temperatures).**

Test problem 1: 6 hot and 6 cold streams							
Hot stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)	Cold stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)
H1	1.00	280	100	C1	0.50	30	200
H2	3.00	200	80	C2	1.50	60	90
H3	1.00	220	150	C3	2.00	70	170
H4	2.00	210	90	C4	3.00	110	230
H5	1.00	250	180	C5	1.50	90	140
H6	2.00	270	120	C6	4.00	120	250

Price of steam: \$80 kg/kW.

Price of cooling water: \$20 kg/kW.

233

234 To validate the model (see Eq.(17)), our results are compared with the results obtained by the pinch location
 235 method, in its disjunctive version, proposed by Grossmann et al. (1998) and the results obtained according to the
 236 method proposed by Navarro-Amorós et al. (2013).

237 The solution of this example is shown in Table 3.

238 **Table 3. Computational statistics and solution of test problem 1 (fixed temperatures).**

Results test problem 1			
	Present work	GYK model	Navarro-Amorós et al.
No equations	890	1622	6059
No variables	886	614	1169
No binary variables	288	432	900
CPU time (s) ^a	0.20	0.27	0.35
Heating requirements (kW/kg)	80.00	80.00	80.00
Cooling requirements (kW/kg)	15.00	15.00	15.00
Optimal solution (\$)	6700.00	6700.00	6700.00
Solution of relaxed problem	6700.00	5200.00	0.00

^aIntel Core i7-4790 3.60GHz, using CPLEX 12.4.6 for MILP.

239

240 The results show that the number of continuous and binary variables and total equations is lower in the proposed
 241 model versus the other methods, even though the total number of variables is larger than in the original
 242 disjunctive PLM. The optimal solution (\$6700) is exactly the same in all cases. Regarding the solution of the
 243 relaxed problem, the proposed model obtains the best possible solution.

244

245 **4.2. Case study 2: Process with variable stream conditions (MILP)**

246 In the following examples, inlet and outlet temperatures for hot and cold streams are variables. For these
 247 examples, we have assumed that temperature variation does not affect the rest of the process. To validate our
 248 model (see Eq.(17)), these test problems are also compared with results obtained by the pinch location method
 249 (Grossmann et al., 1998) and the method proposed by Navarro-Amorós et al. (2013).

250 As in the preceding case, the objective function consists of minimizing the utility cost, remaining the heat flow
 251 rates as constant values.

252 Data for different test problems are shown in Table 4.

Table 4. Data for test problem 2-5 (variable temperatures).

Hot stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)	Cold stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)
Test problem 2: 3 hot and 3 cold streams							
H1	0.15	180 - 260	30 - 50	C1	0.20	15 - 135	170 - 190
H2	0.50	120 - 220	75 - 95	C2	0.30	110 - 190	225 - 235
H3	0.10	110 - 155	90 - 100	C3	0.15	70 - 130	140 - 150
Test problem 3: 4 hot and 4 cold streams							
H1	0.15	230 - 260	30 - 50	C1	0.20	10 - 40	170 - 190
H2	0.50	135 - 155	110 - 150	C2	0.30	90 - 110	180 - 225
H3	0.25	80 - 100	20 - 30	C3	0.15	125 - 160	225 - 235
H4	0.30	110 - 120	80 - 100	C4	0.40	130 - 150	250 - 280
Test problem 4: 16 hot and 12 cold streams							
H1	30.00	210 - 255	65 - 90	C1	40.00	25 - 60	160 - 195
H2	45.00	170 - 210	30 - 45	C2	60.00	125 - 160	250 - 295
H3	0.10	95 - 120	35 - 60	C3	0.10	160 - 190	245 - 300
H4	0.10	105 - 135	30 - 60	C4	0.10	155 - 200	240 - 280
H5	0.10	100 - 120	20 - 50	C5	0.10	160 - 195	250 - 290
H6	0.10	100 - 125	40 - 50	C6	0.10	145 - 175	255 - 295
H7	0.10	105 - 130	45 - 60	C7	0.10	160 - 205	235 - 280
H8	0.10	90 - 115	40 - 75	C8	0.10	160 - 190	245 - 300
H9	0.10	95 - 120	35 - 60	C9	0.10	155 - 200	240 - 280
H10	0.10	105 - 135	30 - 60	C10	0.10	160 - 195	250 - 290
H11	0.10	100 - 120	20 - 50	C11	0.10	145 - 175	255 - 295
H12	0.10	100 - 125	40 - 50	C12	0.10	160 - 205	235 - 280
H13	0.10	105 - 130	45 - 60				
H14	0.10	85 - 115	30 - 75				
H15	0.10	105 - 135	40 - 55				
H16	0.10	100 - 125	35 - 65				
Test problem 5: 20 hot and 20 cold streams							
H1	6.00	360 - 440	108 - 132	C1	14.00	144 - 176	360 - 440
H2	2.00	306 - 374	108 - 132	C2	3.00	90 - 110	225 - 275
H3	0.50	342 - 418	135 - 165	C3	0.40	45 - 55	270 - 330
H4	8.00	270 - 330	90 - 110	C4	2.50	180 - 220	342 - 418
H5	3.00	378 - 462	144 - 176	C5	2.00	135 - 165	405 - 495
H6	4.00	351 - 429	99 - 121	C6	6.00	90 - 110	162 - 198
H7	0.20	324 - 396	180 - 220	C7	1.50	180 - 220	315 - 385
H8	0.60	252 - 275	117 - 143	C8	0.20	108 - 132	297 - 363
H9	1.50	225 - 275	72 - 88	C9	5.50	99 - 121	198 - 242
H10	4.00	297 - 363	153 - 187	C10	3.00	171 - 209	324 - 396
H11	12.00	387 - 473	270 - 330	C11	8.00	234 - 286	378 - 462
H12	8.00	180 - 220	90 - 110	C12	12.00	72 - 88	162 - 198
H13	5.00	135 - 165	63 - 77	C13	0.30	117 - 143	351 - 429
H14	0.06	297 - 363	162 - 198	C14	4.50	162 - 198	234 - 286
H15	0.30	333 - 407	103 - 127	C15	1.00	139 - 170	328 - 401
H16	6.00	319 - 391	94 - 115	C16	0.10	85 - 104	432 - 528
H17	0.90	279 - 341	117 - 143	C17	7.00	157 - 192	346 - 423
H18	3.00	234 - 286	81 - 99	C18	2.00	117 - 143	261 - 319
H19	1.00	270 - 330	103 - 127	C19	0.50	189 - 231	387 - 473
H20	0.30	238 - 291	171 - 209	C20	1.70	207 - 253	333 - 407

Price of steam: \$80 kg/kW.

Price of cooling water: \$20 kg/kW.

Table 5. Results of test problem 2-5 (variable temperatures).

Hot stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)	Cold stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)
Test problem 2: 3 hot and 3 cold streams							
H1	0.15	260.00	50.00	C1	0.20	15.00	190.00
H2	0.50	210.00	95.00	C2	0.30	110.00	225.00
H3	0.10	110.00	100.00	C3	0.15	70.00	150.00
Test problem 3: 4 hot and 4 cold streams							
H1	0.15	260.00	50.00	C1	0.20	10.00	170.00
H2	0.50	155.00	120.50	C2	0.30	90.00	180.00
H3	0.25	80.00	30.00	C3	0.15	160.00	225.00
H4	0.30	110.00	100.00	C4	0.40	150.00	250.00
Test problem 4: 16 hot and 12 cold streams							
H1	30.00	255.00	90.00	C1	40.00	25.00	160.00
H2	45.00	210.00	45.00	C2	60.00	136.32	250.00
H3	0.10	95.00	60.00	C3	0.10	190.00	245.00
H4	0.10	105.00	60.00	C4	0.10	200.00	240.00
H5	0.10	100.00	50.00	C5	0.10	195.00	250.00
H6	0.10	100.00	50.00	C6	0.10	175.00	255.00
H7	0.10	105.00	60.00	C7	0.10	205.00	235.00
H8	0.10	90.00	75.00	C8	0.10	190.00	245.00
H9	0.10	95.00	60.00	C9	0.10	200.00	240.00
H10	0.10	105.00	60.00	C10	0.10	195.00	250.00
H11	0.10	100.00	50.00	C11	0.10	175.00	255.00
H12	0.10	100.00	50.00	C12	0.10	205.00	235.00
H13	0.10	105.00	60.00				
H14	0.10	85.00	75.00				
H15	0.10	105.00	55.00				
H16	0.10	100.00	65.00				
Test problem 5: 20 hot and 20 cold streams							
H1	6.00	423.00	127.00	C1	14.00	149.00	365.00
H2	2.00	337.00	127.00	C2	3.00	95.00	270.00
H3	0.50	337.00	149.00	C3	0.40	50.00	335.00
H4	8.00	325.00	105.00	C4	2.50	225.00	423.00
H5	3.00	437.00	149.00	C5	2.00	140.00	437.00
H6	4.00	365.00	116.00	C6	6.00	95.00	182.00
H7	0.20	365.00	175.00	C7	1.50	225.00	365.00
H8	0.60	286.00	138.00	C8	0.20	113.00	365.00
H9	1.50	270.00	83.00	C9	5.50	104.00	247.00
H10	4.00	337.00	182.00	C10	3.00	214.00	401.00
H11	12.00	423.00	270.00	C11	8.00	286.00	383.00
H12	8.00	182.00	105.00	C12	12.00	77.00	203.00
H13	5.00	130.00	72.00	C13	0.30	122.00	423.00
H14	0.06	337.00	162.00	C14	4.50	167.00	291.00
H15	0.30	401.00	122.00	C15	1.00	144.00	406.00
H16	6.00	365.00	110.00	C16	0.10	90.00	437.00
H17	0.90	336.00	138.00	C17	7.00	162.00	365.00
H18	3.00	236.00	94.00	C18	2.00	122.00	286.00
H19	1.00	325.00	122.00	C19	0.50	236.00	401.00
H20	0.30	286.00	167.00	C20	1.70	236.00	338.00

Table 6. Computational statistics and solution of test problem 2-5 (variable temperatures).

	No equations	No variables	No binary variables	CPU time (s) ^a	Heating requirements (kW/kg)	Cooling requirements (kW/kg)	Optimal solution (\$)	Solution of relaxed problem
Test problem 2								
Present work	230	237	42	0.03	0.0	8.5	170.0	0.00
GYK model	416	171	108	0.45	0.0	8.5	170.0	0.00
Navarro-Amorós	3047	1247	216	0.75	0.0	8.5	170.0	0.00
Test problem 3								
Present work	402	411	26	0.02	49.5	5.0	4060.0	3282.73
GYK model	730	291	192	0.11	49.5	5.0	4060.0	620.00
Navarro-Amorós	5375	2125	307	0.22	49.5	5.0	4060.0	3124.02
Test problem 4								
Present work	4762	4791	364	0.14	1694.0	1852.2	172564.0	84768.34
GYK model	8710	3251	2352	0.42	1694.0	1852.2	172564.0	0.00
Navarro-Amorós	44719	5857	4763	1000.05	1694.0	1852.2	172564.0	0.00
Test problem 5								
Present work	9682	9723	704	0.36	0.0	116.3	2326.0	0.00
GYK model	17722	6563	4800	37.74	0.0	116.3	2326.0	0.00
Navarro-Amorós	109799	11725	9683	1161.33	0.0	116.3	2326.0	0.00

^aIntel Core i7-4790 3.60GHz, using CPLEX 12.4.6 for MILP.

259

260 As it is shown in Table 6, for test problem 2, the optimal solution is \$170 for all cases, and the relaxation gap for
261 all methods is bad because the solution to the relaxed problem is equal to zero.

262 The optimal solution to test problem 3 is \$4060 and the relaxation gap of the proposed model is much better than
263 the relaxation gap obtained by the other methods (19 % in the novel model, 84 % in the Grossmann Disjunctive
264 model and 23 % in the model by Navarro-Amorós et al. (2013)).

265 The same behavior occurs on test problem 4. The optimal solution to test problem 4 is \$172564 and the
266 relaxation gap is better than the gap obtained by the others models. It is the only model with relaxation different
267 from zero.

268 Regarding the test problem 5, the optimal solution and the relaxation gap is the same for all cases. However, it is
269 interesting to remark the CPU time difference between the models. Indubitably, our model is much faster than
270 the other methods, allowing to solve problems with a high number of hot and cold streams.

271

272 4.3. Case study 3: Process with variable stream conditions with penalty function (MINLP)

273 In previous examples, we assumed that the operating conditions do not affect the heat integration and, therefore,
274 basically the optimal solution select the temperatures that allow the maximum heat integration. In order to
275 simulate the behavior of an actual system, we propose an example in which the temperatures for the optimal
276 operating conditions without heat integration are known and any deviation of those values carries out a penalty
277 in the total cost.

278 In this case study (test problem 6), the objective function consists of two parts; the first one concerns the cost of
 279 utilities, and the second term penalizes the deviation of temperature from a given set value:

$$\min (cost_H Q_H + cost_C Q_C) + w \cdot \sum_{k \in ST} (T_k^{in} - TM_k^{in})^2 + (T_k^{out} - TM_k^{out})^2 \quad (23)$$

280 where w is the penalization factor and TM are the optimal temperatures of the non-heat integrated process (we
 281 have assumed that the optimal temperatures are the mean values between the upper and lower bounds).

282 Data used in this case are shown in Table 7.

283 **Table 7. Data for test problem 6 (non-linear, variable temperatures).**

Test problem 6 (non-linear): 3 hot and 3 cold streams							
Hot stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)	Cold stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)
H1	0.15	180 - 260	30 - 50	C1	0.20	15 - 25	170 - 190
H2	0.50	120 - 140	75 - 95	C2	0.30	110 - 140	225 - 235
H3	0.10	110 - 155	90 - 100	C3	0.15	70 - 100	140 - 150

Price of steam: \$80 kg/kW.

Price of cooling water: \$20 kg/kW.

284

285 In this case, the model is a non-convex MINLP problem. The optimal solution achieved with our model
 286 (\$2900.5) is better than the solution obtained by the other models (the same initial point was used in all the
 287 cases). Furthermore, the relaxation gap is considerably reduced compared to the other models. For this case, the
 288 results and the other relevant parameters are shown in Table 8 and Table 9, respectively.

289 **Table 8. Results of test problem 6 (non-linear, variable temperatures).**

Test problem 6 (non-linear): 3 hot and 3 cold streams							
Hot stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)	Cold stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)
H1	0.15	260.00	50.00	C1	0.20	15.00	190.00
H2	0.50	210.00	95.00	C2	0.30	110.00	225.00
H3	0.10	110.00	100.00	C3	0.15	70.00	150.00

290

291 **Table 9. Computational statistics and solution of test problem 5 (non-linear, variable temperatures).**

Test problem 6			
	Present work	GYK model	Navarro-Amorós et al.
No equations	230	416	3047
No variables	237	171	1247
No binary variables	17	108	216
CPU time (s) ^a	0.02	0.68	3.33
Heating requirements (kW/kg)	29.25	28.90	29.25
Cooling requirements (kW/kg)	10.80	12.76	11.11
Optimal solution (\$)	2900.50	2918.63	2903.63
Solution of relaxed problem	2002.62	767.00	1904.73

^aIntel Core i7-4790 3.60GHz, using DICOPT for MINLP.

292

293 Optimization has been performed with different weights of the penalization factor w (see Eq. (23)). The optimal
 294 results are shown in Fig. 2.

295

296 <Insert Fig. 2>

297 **Fig. 2. Optimal solutions to test problem 6 for different penalization factors.**

298

303
304
305
306
307
308
309
310
311
312
313
314
315

The results show that when the penalty factor is lower than two, the optimal solution is mainly affected by the utility costs. However, when the penalty factor increases, the term that penalizes the deviation of temperature from the central values between the upper and lower bounds is the most important factor, making the optimal solution constant (around \$3300).

4.4. Case study 4: Hybrid simulation-optimization process (MINLP)

Another case study performed was a hybrid simulation-optimization problem, in which the heat integration in the form of explicit equations is combined with the simulation of a chemical process. The process was simulated in Aspen HYSYS v.8.4. (Hyprotech, 1995 - 2011). As MINLP solver, we use an in-house implementation (Caballero et al., 2014) of a basic Branch and Bound algorithm interfaced with TOMLAB-MATLAB (Holmström, 1999).

The following case study corresponds to the design of a natural gas plant (Seider et al., 1999). Consider that we want to obtain a gaseous product with at least 4500 kmol/h of nC₄ and lighter species, with a combined mole percentage of at least 99.5 % and at 2026 kPa. The liquid product is required to be at least 1034 kPa, with at least 30 kmol/h of nC₅ and nC₆ and a combined mole percentage of at least 65 %. Data for the problem are shown in Table 10.

Table 10. Feed data to natural gas flowsheet.

Feed stream		
Molar flow	5000.0	kmol/h
Composition (molar flows)		
C ₁	4138.0	kmol/h
C ₂	435.5	kmol/h
C ₃	205.5	kmol/h
nC ₄	70.5	kmol/h
nC ₅	28.5	kmol/h
nC ₆	16.5	kmol/h
N ₂	105.5	kmol/h
Temperature	20.0	°C
Pressure	1013.0	kPa
Thermodynamics (fluid package)	Peng-Robinson	

316
317
318
319
320
321
322

The flowsheet for the process is shown in Fig. 3. The feed is compressed to 2280 kPa, and is cooled before entering the flash unit, at 2103 kPa. The flash products are heated. The liquid product enters in the second flash vessel, at 2068 kPa. Its liquid product is fed to the distillation column, where most of the propane is removed by overhead. The column has 12 theoretical trays, and the feed enters to the fourth tray from the top. The column recovers 99 % of C₃ in the distillate and 99 % of nC₅ in the bottoms.

<Insert Fig. 3>

Fig. 3. Process flow diagram for natural gas synthesis.

323
324
325
326
327
328
329
330
331
332

We assume that the cost of the process are not considerably affected (the TAC of the system is around \$3.039 million/year, without the heat and cooling requirements). As a result, it is not taken into account, but changes in temperatures modified the operating conditions and the purity constraints must be met. Therefore, the objective of this problem consists of minimizing the heat supplied by the hot and the cold utilities. The streams affected by the heat integration were all inlet and outlet streams of the heat exchangers, and the streams of the condenser (the reboiler was not taken into account because, by the temperature differences, it cannot be heat integrated). The temperature bounds for all streams, the main constraints, and the optimal solution are shown in Table 11.

Table 11. Data and optimal solution to natural gas flowsheet.

	Streams	Temperature range (°C)	Solution temperature (°C)
H1	In HE1	88.82 – 88.82	88.82
	Out HE1	-30.00 – -20.00	-20.00
H2	In HE2	-30.00 – -20.00	-20.00
	Out HE2	0.00 – 60.00	60.00
H3	In HE3	-30.00 – -20.00	-20.00
	Out HE3	0.00 – 60.00	60.00
Restrictions	Range	Optimal value	
Molar flow light product (kmol/h)	≥ 4500	4950.3521	
Molar frac. (nC4 + lighter) in light product	≥ 0.995	0.9977	
Molar flow heavy product (kmol/h)	≥ 30	49.6479	
Molar frac. (nC5 + nC6) in heavy product	≥ 0.65	0.6755	
Solution parameters			
Number of equations		111	
Number of variables		78	
Number of binary variables		32	
Optimal solution			
Heating requirements (kW)		0.000	
Cooling requirements (kW)		2,465.904	
Optimal solution (\$)		12,329.520	
Total Annualized Cost (\$/year)		3,051,293.981	

334

335 Table 11 shows that the optimal solution satisfies all the constraints. Furthermore, the heat integration of the
336 system eliminates the need for hot utility (except the hot utility needed in the reboiler, which does not affect the
337 heat exchanger network); only cold utilities are needed to satisfy the requirements of the process. The heat
338 exchanger network is shown in Fig. 4.

339

340

<Insert Fig. 4>

341

Fig. 4. Heat exchanger network for natural gas process.

342

343 This case study shows that the proposed model can be implemented to optimize hybrid simulation-optimization
344 problems, in which the process simulation is combined with the heat integration in the form of explicit
345 equations.

346

347 4.5. Case study 5: Extension of the method to multiple utilities (MILP)

348 As a final point, the method has been extended to the case of multiple utilities. In the next examples, all inlet and
349 outlet streams are variables.

350 The first example (test problem 7) corresponds to a problem with four hot streams and six cold streams. We have
351 considered the possibility of adding a new hot utility ($TH_{MP} = 254^{\circ}C$,). The objective function consists of
352 minimizing the utility costs ($C_{HP}Q_{HP} + C_{MP}Q_{MP} + C_CQ_C$).

353 The second example (test problem 8) corresponds to a problem with two hot streams and one cold stream. We
354 have consider the possibility of adding two new hot utilities, ($TH_{MP} = 160^{\circ}C$) and ($TH_{LP} = 130^{\circ}C$). The
355 objective function consists of minimizing the utility costs ($C_{HP}Q_{HP} + C_{MP}Q_{MP} + C_{LP}Q_{LP} + C_CQ_C$).

356 Data used in this case study are shown in Table 12.

Table 12. Data for case study 5 (non-linear, variable temperatures).

Hot stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)	Cold stream	FCp (kW/°C)	Inlet T (°C)	Outlet T (°C)
Test problem 7: 4 hot and 6 cold streams							
H1	0.100	315 - 327	20 - 30	C1	0.200	85 - 110	290 - 330
H2	0.250	210 - 220	140 - 160	C2	0.070	25 - 55	160 - 185
H3	0.020	200 - 220	50 - 60	C3	0.175	70 - 95	120 - 140
H4	0.340	155 - 160	40 - 45	C4	0.060	55 - 70	150 - 185
				C5	0.200	135 - 150	270 - 320
				C6	0.300	8 - 30	42 - 75
Test problem 8: 2 hot and 1 cold stream							
H1	10.000	95 - 115	15 - 35	C1	7.500	15 - 35	175 - 195
H2	5.000	175 - 195	25 - 45				

Price of HP steam: \$160 kg/kW.

Price of MP steam: \$110 kg/kW.

Price of LP steam: \$50 kg/kW.

Price of cooling water: \$10 kg/kW.

358

359 Results have been compared with the same process, but taking into account only single utilities, where the
360 objective function consist of minimizing the utility costs ($C_H Q_H + C_C Q_C$).

361 For test problem 7, the optimal solution achieved is \$2533.0, while the optimal solution obtained taking into
362 account only single utilities is \$3168.0. Regarding the solution obtained for test problem 8, the optimal solution
363 achieved adding two utilities is \$16875.0, while the optimal solution obtained taking into account only one hot
364 utility is \$24750.0.

365 The results obtained and other relevant parameters of case study 5 are shown in Table 13 and Table 14,
366 respectively.

Table 13. Computational statistics and solution of test problem 7 (variable temperatures).

	Test problem 7 (single utilities)	Test problem 7 (multiple utilities)
No equations	622	749
No variables	633	547
No binary variables	29	29
CPU time (s) ^a	0.11	0.86
Heating requirements (kW/kg)		
HP steam	19.80	7.10
MP steam	-	12.70
Cooling requirements (kW/kg)	0.00	0.0
Optimal solution (\$)	3168.00	2533.00
Solution of relaxed problem	2912.00	2357.00

^aIntel Core i7-4790 3.60GHz, using CPLEX 12.4.6 for MILP.

368

Table 14. Computational statistics and solution of test problem 8 (variable temperatures).

	Test problem 8 (single utilities)	Test problem 8 (multiple utilities)
No equations	62	160
No variables	66	120
No binary variables	6	6
CPU time (s) ^a	0.08	0.52
Heating requirements (kW/kg)		
HP steam	125.00	12.50
MP steam	-	75.00
LP steam	-	37.50
Cooling requirements (kW/kg)	475.00	475.00
Optimal solution (\$)	24750.00	16875.00
Solution of relaxed problem	7750.00	16375.00

^aIntel Core i7-4790 3.60GHz, using CPLEX 12.4.6 for MILP.

370

371 In addition, as it is shown in Table 13 and Table 14, the relaxation gap is reasonable.

372

373 5. Conclusions

374 We have proposed a new MILP model based on disjunctive programming for the simultaneous optimization and
 375 energy integration of systems with variable input and output process stream temperatures. This model allows us
 376 to obtain a robust alternative to the disjunctive model for the simultaneous flowsheet optimization and heat
 377 integration proposed by Grossmann et al. (1998).

378 The results show that our model is very competitive from the point of view of CPU time, includes fewer binary
 379 variables and equations, although the number of total variables is slightly larger than the original disjunctive
 380 formulation. Furthermore, the proposed model improves the relaxation gap, compared to two different methods.

381 Different test problems have shown that the model is robust and reliable. One of the main characteristics of the
 382 novel model is that it can be ‘added’ to any model with almost no modifications of the existing model and,
 383 therefore, its implementation is straightforward. If the heat flows in the original model are not affected by the
 384 temperature then the new equations are all linear, with some integer variables, and therefore we do not expect a
 385 significant increase in the complexity of the original model.

386

387 Acknowledgments

388 The authors gratefully acknowledge the financial support by the Ministry of Economy and Competitiveness from
 389 Spain, under the project CTQ2012-37039-C02-02, and Call 2013 National Sub-Program for Training, Grants for
 390 pre-doctoral contracts for doctoral training (BES-2013-064791).

391

392 Nomenclature

C_C	Cost of the cold utility
C_H	Cost of the heat utility
F_i	Heat capacity flowrate of hot stream i
f_j	Heat capacity flowrate of cold stream j
i	Hot stream
j	Cold stream
m	Mass flow rate of a stream
n_c	Number of cold streams

n_h	Number of hot streams
P	Index set of all the hot and cold process streams (pinch candidates)
Q_C	Heat removed by the cold utility
Q_H	Heat provided by the hot utility
Q_C^p	Cooling utilities required form each pinch candidate
Q_H^p	Heating utilities required form each pinch candidate
QA_C^p	Total cool content above the pinch
QA_H^p	Total heat content above the pinch
T^p	Pinch point temperature
T_i^{in}	Inlet temperature for the hot stream i
T_i^{out}	Outlet temperature for the hot stream i
t_j^{in}	Inlet temperature for the cold stream j
t_j^{out}	Outlet temperature for the cold stream j
Tin_i	Actual inlet temperature for the hot stream i
tin_j	Actual inlet temperature for the cold stream j
$Tout_i$	Actual outlet temperature for the hot stream i
$tout_j$	Actual inlet temperature for the cold stream j
TM	Optimal temperatures of the non-heat integrated process
w	Penalization factor
Y^{iso}	Boolean variable that takes the “True” value if the temperature of the isothermal stream is greater than the pinch candidate temperature
yc	Binary variable related to the max operator that represents the cold streams
yh	Binary variable related to the max operator that represents the hot streams
ΔT_{min}	Minimum heat recovery approach temperature
λ	Specific heat associated with the charge of phase
Ω	Total heat surplus

393

394 **References**

- 395 Ahmad S, Linnhoff B, Smith R. Cost optimum heat exchanger networks—2. targets and design for
396 detailed capital cost models. *Comput Chem Eng* 1990; 14:751-767.
- 397 Ahmetović E, Ibrić N, Kravanja Z, Grossmann IE. Water and energy integration: A comprehensive
398 literature review of non-isothermal water network synthesis. *Comput Chem Eng* 2015;
399 82:144-171.
- 400 Ahmetović E, Kravanja Z. Simultaneous synthesis of process water and heat exchanger networks.
401 *Energy* 2013; 57:236-250.
- 402 Balakrishna S, Biegler LT. Targeting strategies for the synthesis and energy integration of
403 nonisothermal reactor networks. *Ind Eng Chem Prod DD* 1992; 31:2152.
- 404 Biegler LT. *Nonlinear Programming. Concepts, Algorithms, and Applications to Chemical Processes.*
405 SIAM. Society for Industrial and Applied Mathematics; 2010.
- 406 Caballero JA, Grossmann IE. Structural considerations and modeling in the synthesis of heat-
407 integrated-thermally coupled distillation sequences. *Ind Eng Chem Res* 2006; 45:8454-8474.
- 408 Caballero JA, Navarro MA, Ruiz-Femenia R, Grossmann IE. Integration of different models in the
409 design of chemical processes: Application to the design of a power plant. *Appl Energy* 2014;
410 124:256-273.
- 411 Corbetta M, Grossmann IE, Manenti F. Process simulator-based optimization of biorefinery
412 downstream processes under the Generalized Disjunctive Programming framework. *Comput*
413 *Chem Eng* 2016; 88:73-85.
- 414 Dunn RF, El-Halwagi MM. Process integration technology review: background and applications in the
415 chemical process industry. *J Chem Technol Biotechnol* 2003; 78:1011-1021.

416 Duran MA, Grossmann IE. Simultaneous optimization and heat integration of chemical processes.
417 AIChE J 1986; 32:123-138.

418 Fernández I, Renedo CJ, Pérez SF, Ortiz A, Mañana M. A review: Energy recovery in batch processes.
419 Renew Sust Energ Rev 2012; 16:2260-2277.

420 Furman KC, Sahinidis NV. A critical review and annotated bibliography for heat exchanger network
421 synthesis in the 20th Century. Ind Eng Chem Res 2002; 41:2335-2370.

422 Grossmann IE, Caballero JA, Yeomans H. Mathematical programming approaches to the synthesis of
423 chemical process systems. Korean J Chem Eng 1999; 16:407-426.

424 Grossmann IE, Trespalacios F. Systematic modeling of discrete-continuous optimization models
425 through generalized disjunctive programming. AIChE J 2013; 59:3276-3295.

426 Grossmann IE, Yeomans H, Kravanja Z. A rigorous disjunctive optimization model for simultaneous
427 flowsheet optimization and heat integration. Comput Chem Eng 1998; 22:A157-A164.

428 Gundersen T, Naess L. The synthesis of cost optimal heat exchanger networks. Comput Chem Eng
429 1988; 12:503-530.

430 Holmström K. The TOMLAB optimization environment in Matlab. Adv Model Optim 1999; 1:47-69.
431 Hyprotech, Ltd. HYSYS. Hyprotech Ltd. 1995 - 2011.

432 Jezowski J. Exchanger Network Grassroot and Retrofit Design. The Review of the State-of-the-Art:
433 Part II. Heat Exchanger Network Synthesis by Mathematical Methods and Approaches for
434 Retrofit Design. Hung J Ind Chem 1994a; 22:295-308.

435 Jezowski J. Heat Exchanger Network Grassroot and Retrofit Design. The Review of the State-of-the-
436 Art: Part I. Heat Exchanger Network Targeting and Insight Based Methods of Synthesis. Hung
437 J Ind Chem 1994b; 22:279-294.

438 Klemeš JJ, Kravanja Z. Forty years of Heat Integration: Pinch Analysis (PA) and Mathematical
439 Programming (MP). Curr Opin Chem Eng 2013; 2:461-474.

440 Lang YD, Biegler LT, Grossmann IE. Simultaneous optimization and heat integration with process
441 simulators. Comput Chem Eng 1988; 12:311-327.

442 Linhoff B, Hindmarsh E. The pinch design method for heat exchange network. Chem Eng Sci 1983;
443 38:745-763.

444 Linnhoff B. Pinch analysis - a state-of-the-art overview. Chem Eng Res Des 1993; 71:503-522.

445 Linnhoff B, Ahmad S. Cost optimum heat exchanger networks—1. Minimum energy and capital using
446 simple models for capital cost. Comput Chem Eng 1990; 14:729-750.

447 Linnhoff B, Flower JR. Synthesis of heat exchanger networks: I. Systematic generation of energy
448 optimal networks. AIChE J 1978; 24:633-642.

449 Morar M, Agachi PS. Review: Important contributions in development and improvement of the heat
450 integration techniques. Comput Chem Eng 2010; 34:1171-1179.

451 Navarro-Amorós MA, Caballero JA, Ruiz-Femenia R, Grossmann IE. An alternative disjunctive
452 optimization model for heat integration with variable temperatures. Comput Chem Eng
453 2013; 56:12-26.

454 Onishi VC, Ravagnani MASS, Caballero JA. Simultaneous synthesis of heat exchanger networks with
455 pressure recovery: Optimal integration between heat and work. AIChE J 2014a; 60:893-908.

456 Onishi VC, Ravagnani MASS, Caballero JA. Simultaneous synthesis of work exchange networks with
457 heat integration. Chem Eng Sci 2014b; 112:87-107.

458 Papoulias SA, Grossmann IE. A structural optimization approach in process synthesis. Part II: Heat
459 recovery networks. Comput Chem Eng 1983; 7:707-721.

460 Quirante N, Caballero JA. Large scale optimization of a sour water stripping plant using surrogate
461 models. Comput Chem Eng 2016; 92:143-162.

462 Rosenthal RE. GAMS - A user's guide. Washington, DC: GAMS Development Corporation; 2012.
463 SCOPUS Database. Scopus Database. 2016.

464 Seider WD, Seader JD, Lewin DR. Process Design Principles: Synthesis, Analysis, and Evaluation.
465 Wiley; 1999.

466 Sreepathi BK, Rangaiah GP. Review of heat exchanger network retrofitting methodologies and their
467 applications. Ind Eng Chem Res 2014; 53:11205-11220.

468 Wechsung A, Aspelund A, Gundeepsen T, Barton PI. Synthesis of Heat Exchanger Networks at
469 Subambient Conditions with Compression and Expansion of Process Streams. AIChE J 2011;
470 57:2090-2108.

471 Yee TF, Grossmann IE. Simultaneous optimization models for heat integration II. Heat exchanger
472 network synthesis. Comput Chem Eng 1990; 14:1165-1184.

473 Yee TF, Grossmann IE, Kravanja Z. Simultaneous optimization models for heat integration III. Process
474 and heat exchanger network optimization. Comput Chem Eng 1990; 14:1185-1200.

475

476

Figure captions


Fig. 1. Utilities needed for different pinch stream candidates (— Hot - - - Cold). (a) Pinch candidate H1. (b) Pinch candidate H2. (c) Pinch candidate C1. (d) Pinch candidate C2.

Fig. 2. Optimal solutions to test problem 6 for different penalization factors.


Fig. 3. Process flow diagram for natural gas synthesis.

Fig. 4. Heat exchanger network for natural gas process.


Figure(s)

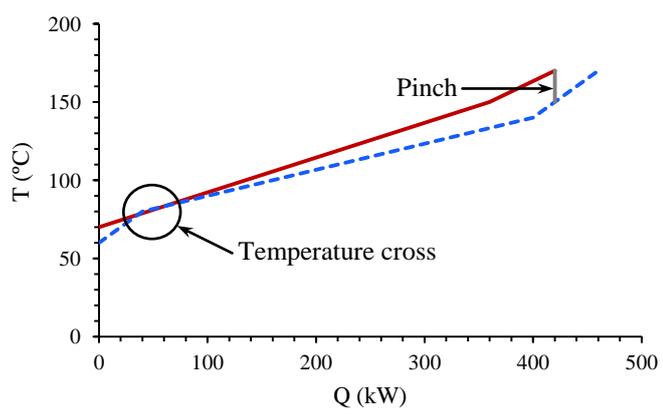


(a)

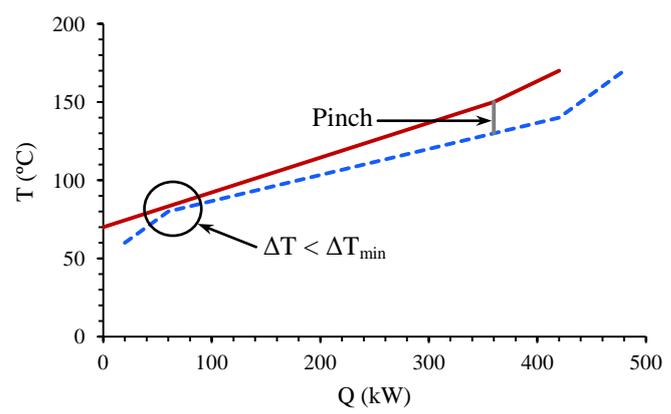

(b)

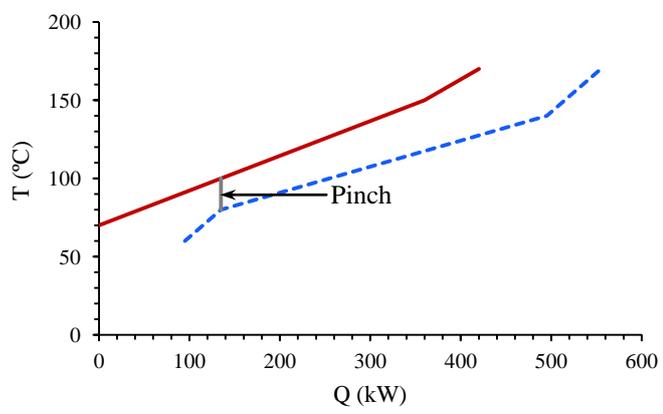


(c)

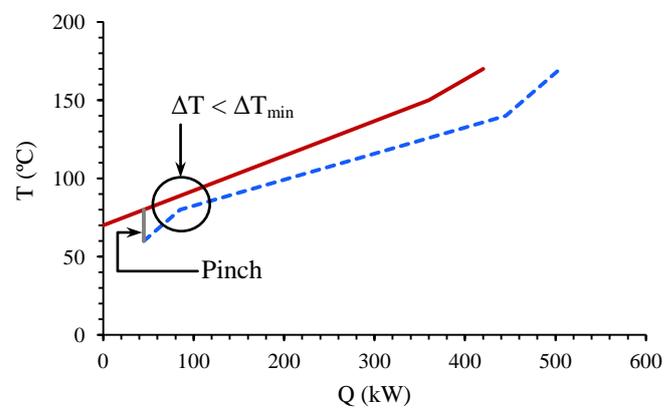


(d)

Figure(s)

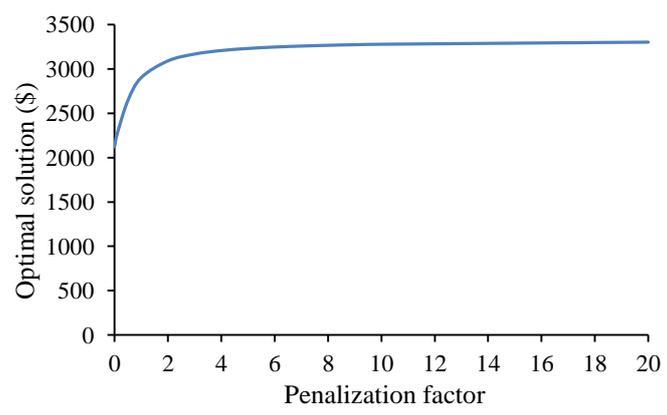

Figure(s)

[Click here to download high resolution image](#)

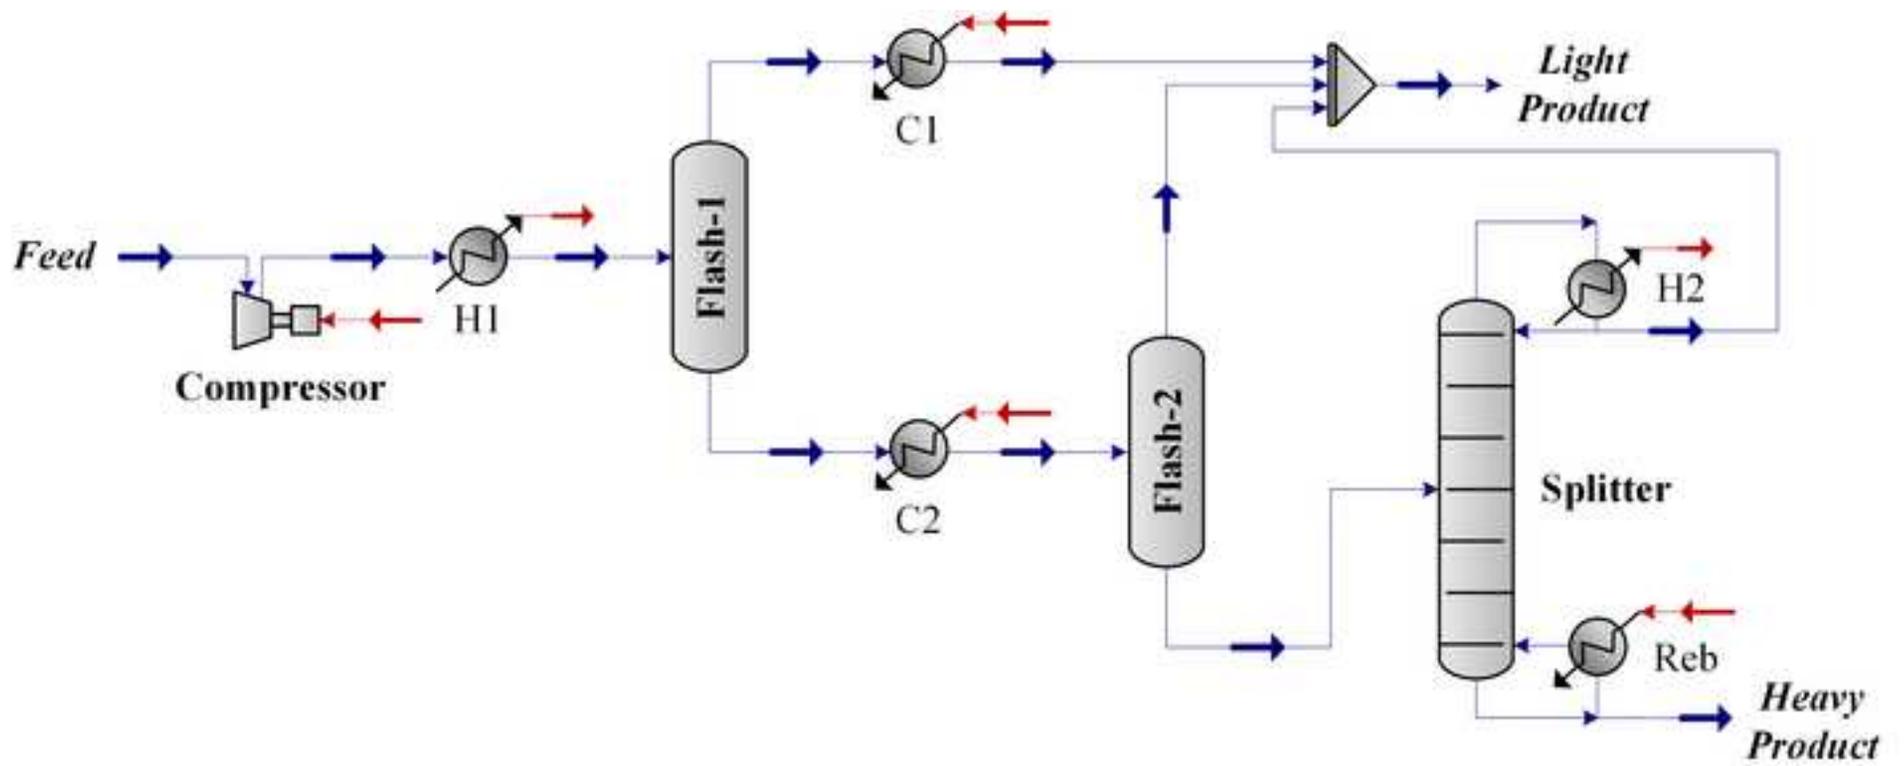

Figure(s)
[Click here to download high resolution image](#)

