

# 3D DOA ESTIMATION OF MULTIPLE SOUND SOURCES BASED ON SPATIALLY CONSTRAINED BEAMFORMING DRIVEN BY INTENSITY VECTORS

Despoina Pavlidi <sup>\*†</sup>, Symeon Delikaris-Manias <sup>‡</sup>, Ville Pulkki <sup>‡</sup>, Athanasios Mouchtaris <sup>\*†</sup>

<sup>\*</sup> FORTH-ICS, Heraklion, Crete, GR-70013, Greece

<sup>†</sup> University of Crete, Department of Computer Science, Heraklion, Crete, GR-70013, Greece

<sup>‡</sup> Aalto University, Department of Signal Processing and Acoustics, Espoo, FI-00076, Finland

## ABSTRACT

Sound source localization in three dimensions with microphone arrays is an active field of research, applicable in sound enhancement, source separation, sound field analysis and teleconferencing systems. In this contribution we propose a method for three dimensional, multiple sound source localization in reverberant environments employing a spatially constrained steered response beamformer on the DOA estimates of the intensity vector. The method enhances significantly previously proposed work by the authors which was relying solely on intensity vector estimates. Experiments are performed in both simulated and real acoustical environments with a spherical microphone array, for multiple sound sources under different reverberation and signal-to-noise ratio (SNR) conditions. The performance of the proposed method is compared with our previously proposed work and a subspace method in the spherical harmonic domain which utilizes the direct-path dominance test. The results demonstrate a significant improvement in terms of localization accuracy.

**Index Terms**— direction of arrival, 3D, multiple sources, spherical microphone array processing, sound intensity

## 1. INTRODUCTION

In direction of arrival (DOA) estimation a wide selection of algorithms is available such as subspace [1], intensity-based [2] and power spectrum methods [3], each of them with different level of complexity. The choice of the algorithm depends on the requirements of the application; the tolerable latency and the required accuracy. Subspace methods such as multiple signal classification (MUSIC) can provide accurate DOA estimates and have been extended in three dimensions for spherical microphone arrays [4]. However, an exhaustive search is required and therefore can be computationally inefficient for real-time applications. Further improvements in the

MUSIC algorithm have been proposed using the direct-path dominance test for highly reverberant environments [5].

Intensity-based methods utilize a pressure and a particle velocity component to analyze the sound field. In practice the pressure and particle velocity are estimated with an omnidirectional and three dipole microphones respectively [6]. Due to its tolerable latency, the intensity vector is an ideal candidate for real-time DOA estimation and has been previously employed in time-frequency domain spatial sound processing [7]. Its performance has been examined in reverberant environments [8] and the formulation has been extended in the spherical harmonic domain with the form of the pseudo intensity vector [2, 9].

In this contribution, an improvement of the DOA estimates using the intensity vector is proposed based on post-processing the short-time estimates with spatially constrained beamforming. We build upon our recent results for 3D DOA estimation using single source zones (SZZs) and the sound intensity vector [10] and demonstrate an improvement in accuracy of DOA estimation. The paper is organized as follows. In Section 2 the background on spherical microphone array processing is presented briefly. Section 3 describes the proposed method of processing the DOA estimates with the use of spherical-harmonic-domain regular beamformers. Section 4 presents the experimental setup for evaluation and the results using a simulated and a real microphone array in reverberant environments with the presence of multiple speech sources. Section 5 presents our conclusions.

## 2. SPHERICAL ARRAY PROCESSING

An overview of the process of how to spatially encode the microphone array sensor signals to a set of spherical harmonic signals is presented. For an extended overview of spherical microphone array decomposition and beamforming, the reader is referred to [11–13]. Spatial encoding refers to the process of approximating the spherical harmonic signals, denoted as  $s_{lm}$  for order  $l$  and degree  $m$ , from microphone signals  $x_q$  of a microphone array with radius  $r_q$  and microphone positions  $\Omega_q = [\theta_q, \phi_q]$  for el-

evaluation  $\theta$  and azimuth  $\phi$ , where  $\theta \in [-\pi/2, \pi/2]$  and  $\phi \in [-\pi, \pi]$ . For a microphone array comprised by  $Q$  microphones, where the pressure is obtained at discrete points  $\Omega_q$ , the spherical harmonic coefficients can be approximated by  $s_{lm}(k, r) \approx \sum_{q=1}^Q g_q(\Omega_q) x_q(k, r, \Omega_q) Y_{lm}^*(\Omega_q)$ , where  $x_q(k, r, \Omega_q)$  are the separate microphone signals for frequency  $k$ ,  $Y_{lm}^*(\Omega_q)$  are the complex conjugate spherical harmonics functions and  $g_q(\Omega_q)$  is selected so that it provides an accurate approximation of the spherical Fourier transform [14, 15]. The accuracy of this approximation depends on how uniformly the microphones are distributed on the surface of the sphere, the type of the array, the radius  $r_q$  and the frequency  $k$  [16]. The number of microphones  $Q$  defines the highest order  $L$  of spherical harmonic signals that can be obtained. For  $L^{\text{th}}$  order of independent harmonics, the number of microphones to reconstruct  $L$  harmonic signals is  $Q \geq (L+1)^2$  [12]. For a uniform spherical arrangement of microphones ( $g_q = 4\pi/Q$ ), the equalized spherical harmonic signals can be expressed in matrix form as

$$\mathbf{s}_L \approx \frac{4\pi}{Q} \mathbf{B}_L^{-1} \mathbf{Y}_L^H(\Omega_Q) \hat{\mathbf{x}}, \quad (1)$$

where  $(^H)$  denotes Hermitian transposition,  $\hat{\mathbf{x}} \in \mathbb{C}^{Q \times 1}$  are the microphone array signals,

$$\mathbf{s}_L = [s_{00}, s_{1-1}, s_{10}, \dots, s_{LL-1}, s_{LL}]^T \in \mathbb{C}^{(L+1)^2 \times 1}, \quad (2)$$

$$\mathbf{B}_L = \text{diag}\{[b_0, b_1, b_1, b_2, \dots, b_L]\} \in \mathbb{C}^{(L+1)^2 \times (L+1)^2} \quad (3)$$

and  $\mathbf{Y}_L(\Omega_Q) \in \mathbb{C}^{Q \times (L+1)^2}$  is the matrix containing the spherical harmonics up to order  $L$  for the  $Q$  microphones with  $\Omega_Q$  being the set containing their positions [14].  $\mathbf{B}_L^{-1}$  removes the effect of the microphone array [15].

### 3. PROPOSED METHOD

In this section we present the proposed method which combines sound intensity vector estimates with spatially constrained beamforming in order to improve the DOA estimation of multiple sound sources. We follow the framework of our previously proposed work [10], which we will briefly describe for completeness and clarity.

#### 3.1. DOA estimation in single-source zones with intensity vector estimates

The sound intensity vector points to the direction of sound energy flow, thus its estimation provides the DOA of the source generating the energy flow as the vector pointing to the opposite direction. The instantaneous active intensity vector can be approximated in the time-frequency (TF) domain with  $n$  being the time index as in [9]

$$\mathbf{I}(k, n) = \frac{1}{2} \Re \left\{ \left[ \frac{s_{00}^*(k, n)}{b_0(k)} \right] \begin{bmatrix} s_x(k, n) \\ s_y(k, n) \\ s_z(k, n) \end{bmatrix} \right\}, \quad (4)$$

where  $s_x, s_y, s_z$  are averages of  $1^{\text{st}}$  order steered eigenbeams with the negative phase towards the x, y and z-axis respectively, calculated as

$$s_\alpha(k, n) = \sum_{m=-1}^1 Y_{1m}(\Omega_\alpha) s_{1m}(k, n), \quad \alpha = \{x, y, z\}, \quad (5)$$

where  $s_{1m}(k, n)$  is defined in Eq.(2) and  $\Omega_\alpha$  is  $(0, \pi)$ ,  $(0, -\pi/2)$  and  $(-\pi/2, 0)$  for each axis.

In [10] we proposed the estimation of  $\mathbf{I}(k, n)$  and consequently of the DOA in TF points of SSZs, i.e., series of  $K$  frequency-adjacent TF points where only one source dominates. In this manner we avoid obscure areas of the TF spectrum where more than one sources are simultaneously active. The SSZs are selected as those areas of the TF spectrum that exhibit a mean correlation coefficient higher than a predefined threshold. The correlation coefficient is defined as


$$\rho_{i,j}(K, n) = \frac{R_{i,j}(K, n)}{\sqrt{R_{i,i}(K, n) \cdot R_{j,j}(K, n)}}, \quad (6)$$

where  $R_{i,j}(K, n) = \sum_{k \in K} |X_i(k, n) \cdot X_j(k, n)|$  is the cross-correlation of the magnitude of the TF transform over an analysis zone for any pair of signals  $(x_i, x_j)$ .  $X_i(k, n)$  and  $X_j(k, n)$  are the microphone signals of the  $i^{\text{th}}$  and the  $j^{\text{th}}$  microphones respectively in the TF domain. Note that  $x_q(k, r, \Omega)$  in Section 2 is now expressed in the TF domain as  $X_q(k, n)$  for the  $q^{\text{th}}$  microphone by omitting the  $(r, \Omega)$  parameters.

#### 3.2. From intensity vector estimates to spatially constrained beamforming

DOA estimation through sound intensity vector possesses low computational complexity, since it can provide instantaneous time-frequency estimates. However, by definition, the intensity vector estimation exploits the spherical harmonic analysis of the sound field up to the first order even though the available microphone array may provide higher orders for the analysis. On the other hand, DOA estimation relying on steered-response beamforming, even though it can exhibit high accuracy and exploits the full potential of the recording device, it suffers from high computational complexity due to the exhaustive search of the 3D space. These two different approaches motivated this work to propose a hybrid methodology that takes advantage of the simplicity of the intensity vector estimation and the accuracy of beamforming in order to lead to enhanced DOA estimation compared to [10].

Assume that, although  $-\mathbf{I}(k, n)$  might not point exactly to the DOA of a source, it will point towards the “neighbourhood” of a true source, i.e., it aims near the true direction. We call this a coarse DOA estimation,  $\Omega_c = [\theta_c, \phi_c]$ . We could then beamform around the area where  $-\mathbf{I}(k, n)$  is pointing, i.e., perform spatially constrained beamforming (SCB), and thus obtain a refined DOA estimation. The beamforming is



**Fig. 1.** The gradient purple spherical sector defines the beam-forming area

performed over the spherical sector defined by  $-\mathbf{I}(k, n)$  and a vector of angle distance equal to  $\gamma_b$  from  $-\mathbf{I}(k, n)$  (see also Fig. 1). The DOA,  $\Omega_f = [\theta_f, \phi_f]$ , is then estimated as the index where the power of the SCB gets maximized, i.e.,

$$\Omega_f = \arg \max_{\Omega_s} |p(k, n, \Omega_s)|^2, \quad (7)$$

where  $\Omega_s$  belongs to the set of points in the spherical sector to be scanned, and  $p(k, n, \Omega_s)$  is the beamformer's output for a regular beampattern steered at direction  $\Omega_s$  [1] with  $p(k, n, \Omega_s)$  given by

$$p(k, n, \Omega_s) = \mathbf{Y}_L^*(\Omega_s) \mathbf{s}_L. \quad (8)$$

Once we have estimated all the refined DOAs in the SSZs we form a 2D histogram from the set of estimations in a block of  $N$  consecutive time frames. This constant size block slides one frame each time. We process the 2D histogram as in [10] in order to extract the final DOA estimates. We first smooth the 2D histogram by applying a circularly symmetric Gaussian window  $\mathbf{w}_A(\theta, \phi)$  of zero mean and standard deviation (std) equal to  $\sigma_A$ , leading to

$$\mathbf{y}_s(\theta, \phi) = \sum_i \sum_j \mathbf{y}(i, j) \mathbf{w}_A(\theta - j, \phi - i), \quad (9)$$

where  $\mathbf{w}(\theta, \phi) = \frac{1}{2\pi\sigma^2} e^{-\frac{1}{2} \frac{\theta^2 + \phi^2}{\sigma^2}}$  is the Gaussian window,  $\mathbf{y}(\theta, \phi)$  is the original 2D histogram and  $\mathbf{y}_s(\theta, \phi)$  is the smoothed one. We then iteratively detect the highest peak of the smoothed histogram  $\mathbf{y}_s^g(\theta, \phi)$ , identify its index as the DOA of a source,  $(\theta_g, \phi_g) = \arg \max_{\theta, \phi} \mathbf{y}_s^g(\theta, \phi)$  and remove its contribution from the histogram,  $\delta_g = \mathbf{y}_s(\theta, \phi) \odot \mathbf{w}_C(\theta - \theta_g, \phi - \phi_g)$  by applying a second Gaussian window  $\mathbf{w}_C(\theta, \phi)$  of zero mean and std equal to  $\sigma_C$  until we reach the number  $G$  of sources. Thus the smoothed histogram at each next iteration would be  $\mathbf{y}_s^{g+1}(\theta, \phi) = \mathbf{y}_s^g(\theta, \phi) - \delta_g$ . The core steps of our method are summarized as follows:

1. The encoding of the microphone signals to the spherical harmonic domain.
2. The detection of all the SSZs.
3. The  $\mathbf{I}(k, n)$  estimation leading to coarse DOA estimates in the SSZs.
4. The SCB in neighborhoods of intensity-based DOA estimates for refined DOA estimation in the SSZs.


5. The generation and smoothing of the 2D histogram of a block of refined DOA estimates.
6. The processing of the smoothed 2D histogram to extract the final 3D DOA estimates.

#### 4. EVALUATION


The performance of the proposed method is investigated by conducting extended simulations and real measurements in reverberant environments. A rigid spherical microphone array comprising 32 microphones is utilized, placed at the center of the faces of a truncated icosahedron and radius equal to  $r_q = 4.2$  cm. For the simulations we used the spherical microphone array room impulse response generator by Jarrett et al [17] which is based on the image method of Allen and Berkley [18] to simulate a room of  $5.6 \times 6.3 \times 2.7$  m<sup>3</sup>, having the same dimensions as the room where we conducted the real experiments. The spherical array was placed in the center of the room, and the sound sources were placed 1 m away from the center of the array. The sampling frequency was equal to 48 kHz and the frame size, as well the FFT size, was 2048 samples. We applied 50% overlapping in time and  $K$  was equal to 375 Hz for the detection of SSZs with the mean correlation coefficient threshold set to 0.8. The angle for the spatially constrained beamforming was set to  $\gamma_b = 10^\circ$  and the windows used at the histogram processing had std equal to  $\sigma_A = 5^\circ$  and  $\sigma_C = 20^\circ$ . The speed of sound was  $c = 343$  m/s while the frequency range used was 500-3800 Hz to avoid aliasing phenomena [19]. For the SCB, the spherical harmonic order was  $L = 3$ . In each experiment the minimum angular separation between the sound sources was  $20^\circ$ . The sources had equal power and the SNR at each microphone was estimated as the ratio of the power of each source signal to the power of the noise signal. The performance of the proposed algorithm is demonstrated by the mean estimation error (MEE) which measures the angular distance between a unit vector pointing at the true DOA ( $\mathbf{v}$ ) and a unit vector pointing at the estimated DOA ( $\hat{\mathbf{v}}$ ) [9] over all sound sources and frames of the source signals. The error is defined as

$$\text{MEE} = \frac{1}{N_F G} \sum_n \sum_g \cos^{-1}(\mathbf{v}_{ng}^T \hat{\mathbf{v}}_{ng}), \quad (10)$$

where  $\cos^{-1}(\mathbf{v}_{ng}^T \hat{\mathbf{v}}_{ng})$  expresses the angular distance between the true DOA of the  $g^{\text{th}}$  active source in the  $n^{\text{th}}$  frame and the estimated one. The association between the true and the estimated DOA of a source is based on the permutation that leads to the minimum error, given the permutations between the true DOAs and the estimated ones.  $N_F$  is the total number of frames after subtracting  $N - 1$  frames of the initialization period and  $G$  is the number of active sources, assumed to be known. In all the simulations speech files were used of duration approximately 7 seconds, leading to  $N_F = 282$  frames. Any gaps or silent periods were removed. The block size is equal to 1 second, i.e.,  $N = 46$  frames.

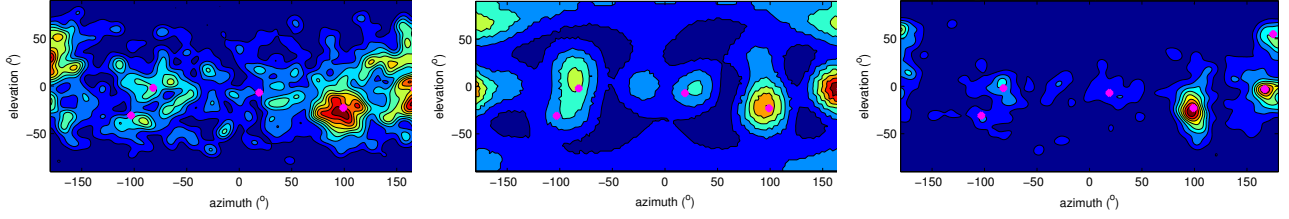

**Fig. 2.** 2D histogram for six sound sources with the intensity vector (left), the corresponding pseudospectrum for the MUSIC subspace method with direct-path dominance test (middle) and the 2D histogram for intensity vector + SCB (right).

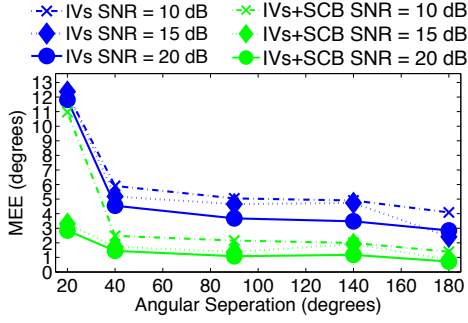


**Fig. 3.** MEE versus angular separation between 2 sound sources for  $RT_{60} = 0.4$  sec and various SNR conditions.

#### 4.1. Results in a simulated environment


In our first set of simulations we investigate the performance of our proposed method (denoted as “IVs+SCB”) for several angular distances between two continuously active sources for  $SNR=\{10,15,20\}$  dB and  $RT_{60} = 0.4$  s in comparison with our previously proposed method of [10] (denoted as “IVs”). We show the results in Fig. 3. In all examined cases, IVs+SCB exhibits better performance than the previous one for all SNR conditions and angular separations. In our second set of simulations we compare the performance of the proposed work with the MUSIC algorithm as implemented in [5] and denoted as “DPD-MUSIC”. In Fig. 2 the 2D histograms for the IVs and the IVs+SCB methods and the pseudospectrum of the DPD-MUSIC are shown for a case of 6 simultaneous speech sources in a simulated reverberant environment with  $RT_{60} = 0.6$  sec. The pink marks denote the true position of the sources. The processing of these representations of 2D estimates is based on one second history for all three methods assuming a known number of sources and follows the steps described in Section 3.2. Results in different acoustical conditions are shown in Fig. 4, for scenarios involving one, three and six simultaneously active speakers in highly reverberant conditions of  $RT_{60} = 0.6$  s and  $SNR=\{10,15,20\}$  dB. DPD-MUSIC and IVs demonstrate similar performance while IVs+SCB exhibits a clear advantage especially for higher signal-to-noise ratios.

#### 4.2. Results in a real environment

For the conduction of real experiments we recorded room impulse responses using the EigenMike spherical microphone

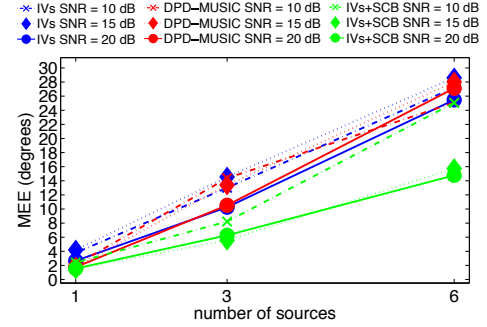

**Fig. 4.** MEE versus number of sources for  $RT_{60} = 0.6$  sec and various SNR conditions.

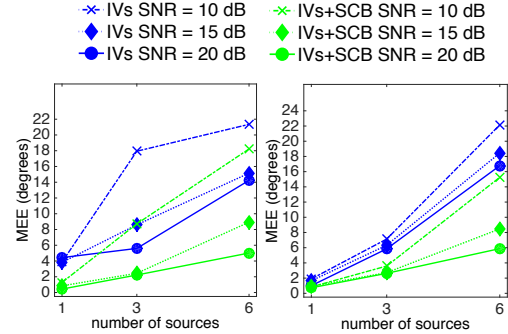

**Fig. 5.** MEE versus number of sources for real RIRs in a room of  $RT_{60} = 0.3$  sec and various SNR conditions (left) and its simulated counterpart (right)

array in a reverberant room of the same dimensions and reverbation time as in the simulations. We show our results in Fig. 5 at the left plot, while at the right one we plot a simulated counterpart. Our proposed method shows high accuracy for medium and higher SNR conditions even when six sources are simultaneously active. For lower SNR conditions and as the number of sources increases the performance degrades as it was expected, following similar tendency between the simulated and real results.

## 5. CONCLUSION

We presented an enhancement to our previously proposed method which significantly improves the accuracy of DOA estimation of multiple sound sources in the 3D space. Our enhanced method utilizes intensity vector estimates to trigger beamforming in a spatially constrained sector, leading to an efficient hybrid algorithm. The evaluation was conducted in

various simulated reverberation and SNR conditions and in real conditions for various number of sources and the method was compared to our previous approach and the state-of-the-art, exhibiting superior performance.

## Acknowledgment

his research has been partly funded by the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreement No 644283, Project LISTEN.

## 6. REFERENCES

- [1] B. Rafaely, Y. Peled, M. Agmon, D. Khaykin, and E. Fisher, "Spherical microphone array beamforming," in *Speech Processing in Modern Communication*, pp. 281–305. Springer, 2010.
- [2] C. Evers, A. H. Moore, and P. A. Naylor, "Multiple source localisation in the spherical harmonic domain," in *14th IEEE IWAENC*, 2014, pp. 258–262.
- [3] H. I. Sun et al., "Robust localization of multiple sources in reverberant environments using EB-ESPRIT with spherical microphone arrays," in *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, 2011, pp. 117–120.
- [4] Xuan Li, Sheng Yan, Xiaochuan Ma, and Chaohuan Hou, "Spherical harmonics music versus conventional music," *Applied Acoustics*, vol. 72, no. 9, pp. 646–652, 2011.
- [5] O. Nadiri and B. Rafaely, "Localization of multiple speakers under high reverberation using a spherical microphone array and the direct-path dominance test," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 22, no. 10, pp. 1494–1505, 2014.
- [6] S. Tervo, "Direction estimation based on sound intensity vectors," in *Proceedings of the European Signal Processing Conference (EUSIPCO)*, 2009, pp. 700–704.
- [7] V. Pulkki, "Spatial sound reproduction with directional audio coding," *Journal of the Audio Engineering Society*, vol. 55, no. 6, pp. 503–516, 2007.
- [8] D. Levin, E. A. P. Habets, and S. Gannot, "On the angular error of intensity vector based direction of arrival estimation in reverberant sound fields," *The Journal of the Acoustical Society of America*, vol. 128, no. 4, pp. 1800–1811, 2010.
- [9] D. P. Jarrett, E. Habets, and P. A. Naylor, "3D source localization in the spherical harmonic domain using a pseudointensity vector," in *Proceedings of the European Signal Processing Conference (EUSIPCO)*, 2010, pp. 442–446.
- [10] D. Pavlidis, S. Delikaris-Manias, V. Pulkki, and A. Mouchtaris, "3D localization of multiple sound sources with intensity vector estimates in single source zones," in *Proceedings of the European Signal Processing Conference (EUSIPCO)*, 2015.
- [11] B. Rafaely, *Fundamentals of Spherical Array Processing*, vol. 8, Springer, 2015.
- [12] T. D. Abhayapala, "Generalized framework for spherical microphone arrays: Spatial and frequency decomposition," in *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, 2008, pp. 5268–5271.
- [13] J. Meyer and G. Elko, "Spherical harmonic modal beamforming for an augmented circular microphone array," in *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, 2008, pp. 5280–5283.
- [14] E. G. Williams, *Fourier acoustics: sound radiation and nearfield acoustical holography*, Acad. press, 1999.
- [15] H. Teutsch, *Modal array signal processing: principles and applications of acoustic wavefield decomposition*, vol. 348, Springer Science & Business Media, 2007.
- [16] B. Rafaely, "Analysis and design of spherical microphone arrays," *IEEE Transactions on Speech and Audio Processing*, vol. 13, no. 1, pp. 135–143, 2005.
- [17] D. P. Jarrett, E. A. P. Habets, M. R. P. Thomas, and P. A. Naylor, "Rigid sphere room impulse response simulation: Algorithm and applications," *The Journal of the Acoustical Society of America*, vol. 132, no. 3, pp. 1462–1472, audiolabs-erlangen.de/fau/professor/habets/software/smirgenerator 2012.
- [18] J. B. Allen and D. A. Berkley, "Image method for efficiently simulating smallroom acoustics," *The Journal of the Acoustical Society of America*, vol. 65, no. 4, pp. 943–950, 1979.
- [19] O. Nadiri and B. Rafaely, "Localization of multiple speakers under high reverberation using a spherical microphone array and the direct-path dominance test," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 22, no. 10, pp. 1494–1505, 2014.