

Evaluation of Applications Latency in Server Centric Passive Optical Network Based Data Centre Architectures

Azza E. A. Eltraify, Mohamed O. I. Musa, Ahmed Al-Quzweeni and Jaafar M.H. Elmirghani

School of Electronic and Electrical Engineering, University of Leeds, Leeds, LS2 9JT, UK

E-mail: {scaee, m.musa, ml13anaq, j.m.h.elmirghani}@leeds.ac.uk

ABSTRACT

The number of applications running in the cloud has dramatically increased in the past decade as well as the number of users accessing them. Data centres resources, architectures and conditions define the performance of the applications running on them. One of the main measures of the network efficiency is the latency, which can have a huge effect on resources utilisation, power consumption and the overall performance. In this paper, the performance of a fog network is evaluated by measuring the latency while running a facial recognition software. The network consists of two processing cells, a core network and a PON cell. The results show how network latency is affected by running the facial recognition software in the end-to-end network setup introduced in this paper.

Keywords: Latency, PON, data centres, power.

1. INTRODUCTION

Data centre architectures have been developed and optimized throughout the year to meet the market demand of growing data centres. Research and studies have been conducted to ensure that data centre architectures are efficient, scalable and more resilient to adapt to the increasing demands [1]-[10]. A key step in the deployment of these architectures is the experimental evaluation of these designs.

Passive optical networks (PON) architectures have been a step towards more efficient networks providing lower power consumption, higher speed and data rates, hence providing lower latency. The architecture demonstrated in this paper is a proposed high-speed server centric architecture as shown in figure 1 [11]. The architecture is composed of several PON cells, each cell contains several racks of servers communicating through an OLT. Communication among servers of different groups is provisioned through an optical backplane [12]. For intra-rack communication, traffic aggregation is carried out by designated relay servers in each group, while communication between the OLT and the racks is provisioned through a coupler (Time Division Multiplexing (TDM)) or via an arrayed Waveguide Grating (AWGR) through Wavelength Division Multiplexing (WDM) [11], [13] - [15].

One of the main issues facing data centre architectures is maintaining low latency which greatly impacts the performance of applications running on them. Applications differ in requirements for resources. Applications that require real time video streaming are considered some of the most demanding applications that exhaust the resources of networks. The application chosen for this paper is a facial recognition software. Facial recognition software operates by going through a video stream to detect faces, capturing them, then analysing and comparing patterns to data either stored in a cloud or a local database. Once a face is captured the analog information is transformed into digital information then sent over for pattern analysis. Facial recognition is considered a very important application in several areas, such as security, law enforcement, health, biometrics, marketing and retail. Thales has been the leading company in biometrics analysis and facial recognition technology. Thales' Live Face Identification System (LFIS) is considered the most advanced solution in the market with face acquisition rate of 99.44% in less than 5 seconds [16].

In this paper an experimental setup of an end-to-end network of over 110 km of optical interconnections is setup while running a facial recognition software on one end and a live stream from an IPTV camera at the other end. The experiment evaluates the effects of facial recognition software on the latency of the network. The results are compared to measurements without the application running on the experiment.

2. EXPERIMENTAL SETUP

The experimental setup consisted of two processing cell, core network, PON cell, and the setup of facial recognition software. The processing cells are based on a server centric passive optical network data centre architecture as shown in Figure 1. The architecture consisted of three racks each with three servers, the communication among racks was achieved using a 10 Gbps Cisco Switch and media converters as an alternative to the optical polymer backplane [12]. The implementation of the architecture and the addressing is shown in Figure 2. The routing functionalities were implemented in servers using a specialised routing operating system called MikroTik OS.

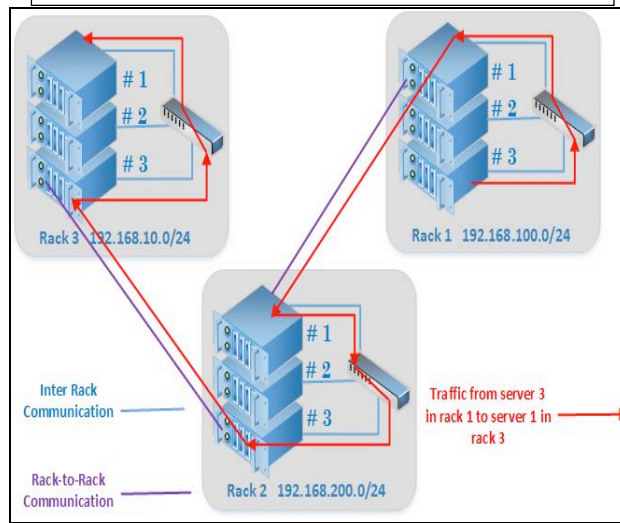
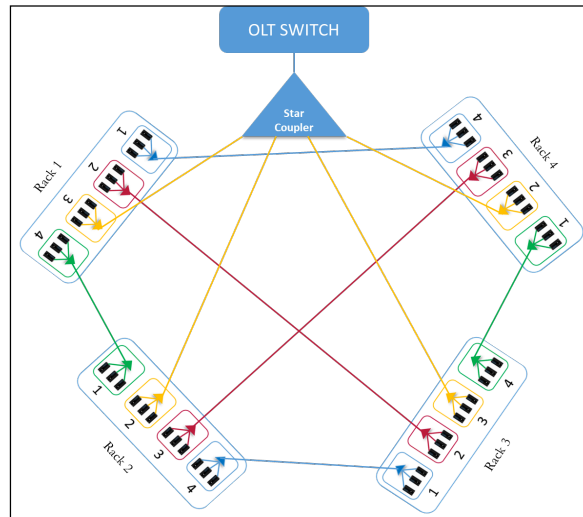


Figure 1. Server Centric PON based data centre network architecture [13]

Figure 2. Intra-rack and inter-rack communication in the proposed PON based data centre architecture

The core network implementation was based on an IP over DWDM core network of three nodes connected via over 100 km of optical fibre links as shown in Figure 4 [18]-[29]. The nodes are equipped with 100 Gbps MRV/ADVA DWDM nodes. The nodes simulate long distances between cities, which provides the ability to run actual tests representing different setups of data centres [30]-[38].

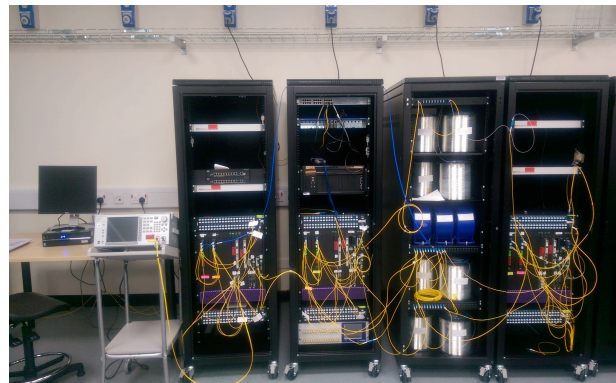
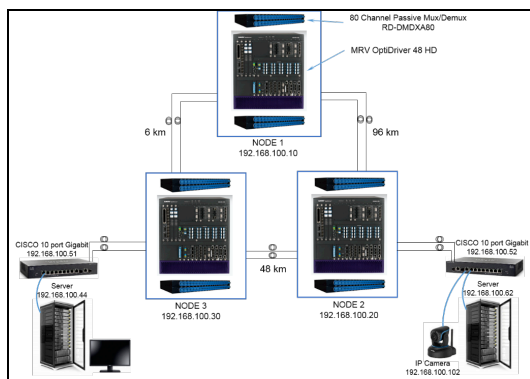


Figure 4. IP/WDM Core Network Nodes

Figure 5. shows the end-to-end communication of the proposed setup with two PON processing cells one at each end, communicating via an IP/WDM core network. The live video stream was captured through an IPTV

Camera connected at one end and the facial recognition software was setup on a computer connected to the other end.

Figure 5. The implemented end-to-end Server Centric Data Centre Architecture, IP/WDM Core Network Nodes and OLT/ONU

In this paper, we study the impact of running a facial recognition software on network latency in an end-to-end network architecture setup composed of two processing cells, IP/WDM Core network nodes and a PON cell. The results in this paper demonstrate the difference in latency in the experimental setup with and without the facial recognition software. It demonstrates the trade-offs between network latency and applications. Table 1. shows the typical latency in conventional mediums of communication that are used in this experiment. The real time video feed was captured through an IPTV camera, and received at the other end by the facial recognition software over a distance of 110 km.

Table 1. Typical Latency of Network Equipment and Mediums.

Comparing Figure 6. and Figure 7. there is a noticeable increase in latency of $\sim 85\%$. Despite the high increase in latency, the architecture and setup have proven to be efficient with the average highest latency being 3.5 ms and the lowest latency was 0.39ms, which is quite low compared to conventional data centre networks architectures setups.

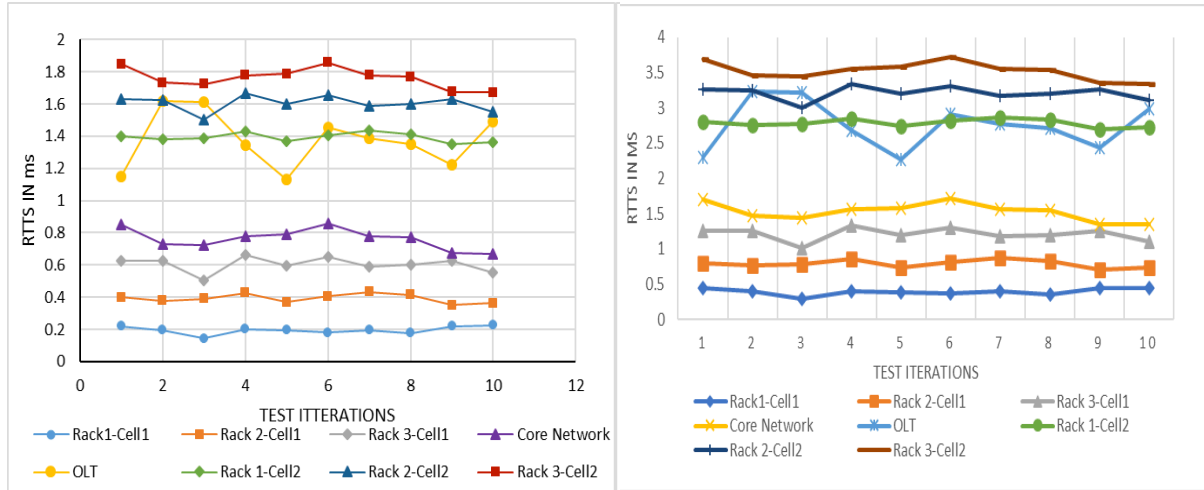


Figure 6. The round-trip time of all node (No software) Figure 7. The round-trip time of all node (Software)

4. CONCLUSIONS

This paper demonstrated an experimental setup to evaluate the ramifications of applications on network latency over server centric passive optical network based data centre architecture. The application used in this experiment was a facial recognition software running at one end of the network while receiving a live video stream from an IPTV camera at the other end. The latency was measured using ICMP signals to capture the round time trip of packets. The results have shown increase in latency after the deployment of the facial recognition software. The maximum latency captured was less than the latency in conventional data centre architectures, which shows that the proposed architecture is more efficient.

ACKNOWLEDGEMENTS

The authors would like to acknowledge funding from the Engineering and Physical Sciences Research Council (EPSRC), INTERNET (EP/H040536/1) and STAR (EP/K016873/1) and from the EPSRC TOWS (EP/S016570/1) project. All data are provided in full in the results section of this paper.

REFERENCES

- [1] X. Dong, T. El-Gorashi, and J. M. Elmirghani, "IP over WDM networks employing renewable energy sources," *J. Lightwave Technol.*, vol. 29, no. 1, pp. 3–14, 2011.
- [2] X. Dong, T. El-Gorashi, and J. M. H. Elmirghani, "Green IP over WDM networks with data centers," *J. Lightwave Technol.*, vol. 29, no. 12, pp. 1861–1880, June 2011.
- [3] X. Dong, T. E. H. El-Gorashi, and J. M. H. Elmirghani, "On the energy efficiency of physical topology design for IP over WDM networks," *J. Lightwave Technol.*, vol. 30, no. 12, pp. 1931–1942, 2012.
- [4] A. Lawey, T. El-Gorashi, and J. Elmirghani, "Distributed energy efficient clouds over core networks," *J. Lightwave Technol.*, vol. 32, no. 7, pp. 1261–1281, Apr. 2014.
- [5] N. Osman, T. El-Gorashi, L. Krug, and J. Elmirghani, "Energy-efficient future high-definition TV," *J. Lightwave Technol.*, vol. 32, no. 13, pp. 2364–2381, July 2014.
- [6] A. Lawey, T. El-Gorashi, and J. Elmirghani, "BitTorrent content distribution in optical networks," *J. Lightwave Technol.*, vol. 32, no. 21, pp. 4209–4225, Nov. 2014.
- [7] L. Nonde, T. El-Gorashi, and J. Elmirghani, "Energy efficient virtual network embedding for cloud networks," *J. Lightwave Technol.*, vol. 33, no. 9, pp. 1828–1849, May 2015.
- [8] M. Musa, T. Elgorashi, and J. Elmirghani, "Energy efficient survivable IP-over-WDM networks with network coding," *J. Opt. Commun. Netw.*, vol. 9, no. 3, pp. 207–217, 2017.
- [9] Musa, Mohamed, Taisir Elgorashi, and Jaafar Elmirghani. "Bounds for Energy-Efficient Survivable IP Over WDM Networks With Network Coding" *Journal of Optical Communications and Networking* 10.5 (2018): 471-481, 2018.
- [10] Elmirghani, J. M. H., T. Klein, K. Hinton, L. Nonde, A. Q. Lawey, T. E. H. El-Gorashi, M. O. I. Musa, and X. Dong. "GreenTouch GreenMeter core network energy-efficiency improvement measures and optimization" *Journal of Optical Communications and Networking* 10, no. 2 (2018): A250-A269.

- [11] Ali Abdullah Hammadi: "Future PON Data Centre Networks", *University of Leeds, School of Electronic and Electrical Engineering*, Aug. 2016.
- [12] J. Beals IV, N. Bamiedakis, A. Wonfor, R. Penty, I. White, J. DeGroot Jr, et al.: "A terabit capacity passive polymer optical backplane based on a novel meshed waveguide architecture", *Applied Physics A*, vol. 95, pp. 983-988, 2009.
- [13] Hammadi, Ali, Taisir EH El-Gorashi, Mohamed OI Musa, and Jaafar MH Elmirghani, "Server-centric PON data center architecture" *In Transparent Optical Networks (ICTON), 2016 18th International Conference on*, pp. 1-4. IEEE, 2016.
- [14] A. Hammadi, Mohamed O. I. Musa, T. E. H. El-Gorashi, and J.M.H. Elmirghani, "Resource Provisioning for Cloud PON AWGR-Based Data Center Architecture", *21st European Conference on Network and Optical Communications (NOC)*, Portugal, 2016.
- [15] Hammadi, Ali, Taisir EH El-Gorashi, and Jaafar MH Elmirghani. "High performance AWGR PONs in data centre networks", *In Transparent Optical Networks (ICTON), 2015 17th International Conference on*, pp. 1-5. IEEE, 2015.
- [16] Thales, "Biometrics at the heart of digital innovation", <https://www.thalesgroup.com/en/markets/digital-identity-and-security/government/documents/facial-recognition>.
- [17] X. Dong, A.Q. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "Energy Efficient Core Networks," *Proc 16th IEEE Conference on Optical Network Design and Modelling (ONDM'12)*, 17-20 April, 2012, UK.
- [18] X. Dong, T. El-Gorashi, J.M.H. Elmirghani, "Green IP Over WDM Networks With Data Centers", *IEEE Journal of Lightwave Technology*, vol.29, no.12, pp.1861-1880, June 2011.
- [19] Eltraify, Azza EA, Mohamed OI Musa, Ahmed Al-Quzweeni, and Jaafar MH Elmirghani. "Experimental Evaluation of Passive Optical Network Based Data Centre Architecture." *In 2018 20th International Conference on Transparent Optical Networks (ICTON)*, pp. 1-4. IEEE, 2018.
- [20] J. M. H. Elmirghani, L. Nonde, A. Q. Lawey, T. E. H. El-Gorashi, M. O. I. Musa, X. Dong, K. Hinton, and T. Klein, "Energy efficiency measures for future core networks," in 2017 Optical Fiber Communications Conference and Exhibition (OFC), March 2017, pp. 1-3.
- [21] H.M.M., Ali, A.Q. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "Future Energy Efficient Data Centers With Disaggregated Servers," *IEEE/OSA Journal of Lightwave Technology*, vol. 35, No. 24, pp. 5361 – 5380, 2017.
- [22] B. Bathula, M. Alresheedi, and J.M.H. Elmirghani, "Energy efficient architectures for optical networks," *Proc IEEE London Communications Symposium*, London, Sept. 2009.
- [23] M. Musa, T.E.H. El-Gorashi and J.M.H. Elmirghani, "Bounds on GreenTouch GreenMeter Network Energy Efficiency," *IEEE/OSA Journal of Lightwave Technology*, vol. 36, No. 23, pp. 5395-5405, 2018.
- [24] B. Bathula, and J.M.H. Elmirghani, "Energy Efficient Optical Burst Switched (OBS) Networks," *IEEE GLOBECOM'09*, Honolulu, Hawaii, USA, November 30-December 04, 2009.
- [25] X. Dong, T.E.H. El-Gorashi and J.M.H. Elmirghani, "Green Optical OFDM Networks," *IET Optoelectronics*, vol. 8, No. 3, pp. 137 – 148, 2014.
- [26] M. Musa, T.E.H. El-Gorashi and J.M.H. Elmirghani, "Energy Efficient Survivable IP-Over-WDM Networks With Network Coding," *IEEE/OSA Journal of Optical Communications and Networking*, vol. 9, No. 3, pp. 207-217, 2017.
- [27] A. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "BitTorrent Content Distribution in Optical Networks," *IEEE/OSA Journal of Lightwave Technology*, vol. 32, No. 21, pp. 3607 – 3623, 2014.
- [28] A.M. Al-Salim, A. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "Energy Efficient Big Data Networks: Impact of Volume and Variety," *IEEE Transactions on Network and Service Management*, vol. 15, No. 1, pp. 458 - 474, 2018.
- [29] A.M. Al-Salim, A. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "Greening big data networks: velocity impact," *IET Optoelectronics*, vol. 12, No. 3, pp. 126-135, 2018.
- [30] N. I. Osman and T. El-Gorashi and J. M. H. Elmirghani, "The impact of content popularity distribution on energy efficient caching," in *2013 15th International Conference on Transparent Optical Networks (ICTON)*, June 2013, pp. 1-6.
- [31] N. I. Osman, T. El-Gorashi, L. Krug, and J. M. H. Elmirghani, "Energy Efficient Future High-Definition TV," *Journal of Lightwave Technology*, vol. 32, no. 13, pp. 2364-2381, July 2014.
- [32] L. Nonde, T. E. H. El-Gorashi, and J. M. H. Elmirghani, "Virtual Network Embedding Employing Renewable Energy Sources," in *2016 IEEE Global Communications Conference (GLOBECOM)*, Dec 2016, pp. 1-6.
- [33] A. Q. Lawey, T. E. H. El-Gorashi, and J. M. H. Elmirghani, "Renewable energy in distributed energy efficient content delivery clouds," in *2015 IEEE International Conference on Communications (ICC)*, June 2015, pp. 128-134.

- [34] A.N. Al-Quzweeni, A. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "Optimized Energy Aware 5G Network Function Virtualization," *IEEE Access*, vol. 7, pp. 44939 - 44958, 2019.
- [35] M.S. Hadi, A. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "Patient-Centric Cellular Networks Optimization using Big Data Analytics," *IEEE Access*, vol. 7, pp. 49279 - 49296, 2019.
- [36] M.S. Hadi, A. Lawey, T.E.H. El-Gorashi, and J.M.H. Elmirghani, "Big Data Analytics for Wireless and Wired Network Design: A Survey," *Elsevier Computer Networks*, vol. 132, No. 2, pp. 180-199, 2018.
- [37] S. Igder, S. Bhattacharya, and J. M. H. Elmirghani, "Energy Efficient Fog Servers for Internet of Things Information Piece Delivery (IoTIPD) in a Smart City Vehicular Environment," in *2016 10th International Conference on Next Generation Mobile Applications, Security and Technologies (NGMAST)*, Aug 2016, pp. 99-104.
- [38] S. H. Mohamed, T. E. H. El-Gorashi, and J. M. H. Elmirghani, "Energy Efficiency of Server-Centric PON Data Center Architecture for Fog Computing," in *2018 20th International Conference on Transparent Optical Networks (ICTON)*, July 2018, pp. 1-4.
- [39] Eltraify, A.E., Musa, M.O. and Elmirghani, J.M., 2019, July. TDM/WDM over AWGR Based Passive Optical Network Data Centre Architecture. In *2019 21st International Conference on Transparent Optical Networks (ICTON)* (pp. 1-5). IEEE.
- [40] Eltraify, A.E., Musa, M.O., Al-Quzweeni, A. and Elmirghani, J.M., 2019, July. Experimental Evaluation of Server Centric Passive Optical Network Based Data Centre Architecture. In *2019 21st International Conference on Transparent Optical Networks (ICTON)* (pp. 1-5). IEEE.
- [41] Al-Azez, Z., Lawey, A., El-Gorashi, T.E.H., and Elmirghani, J.M.H., "Energy Efficient IoT Virtualization Framework with Peer to Peer Networking and Processing" *IEEE Access*, vol. 7, pp. 50697 - 50709, 2019.