

COMPUTATION OF EXTENSIONAL FALL OF SLENDER VISCOUS DROPS BY A ONE-DIMENSIONAL EULERIAN METHOD*

B.H. BRADSHAW-HAJEK[†], Y.M. STOKES[†], AND E.O. TUCK[†]

Abstract. We develop a one-dimensional Eulerian model suitable for analysing the behaviour of viscous fluid drops falling from rest from an upper boundary. The method allows examination of development and behaviour from early time, when a drop and filament begin to form, out to large times when the bulk of the fluid forms a drop at the bottom of a long thin filament which connects it with the upper boundary. This model overcomes problems seen in Lagrangian models, caused by excessive stretching of grid elements, and enables a better examination of the thin fluid filament.

Key words. extensional flow, dripping, moving boundary, viscous flow, free surface

AMS subject classifications. 35K55, 35Q30, 35R35, 76M20, 76D08

1. Introduction. Formation of drops via extensional flow and break-off has been much studied (see the review article by Eggers [1]), motivated by a wide range of applications such as ink-jet printing, spinning and drawing of polymer or glass fibres, glass blowing and blow-moulding in the manufacture of containers, light bulbs and glass tubing, rheological measurement by fibre extension and fibre spinning for polymers and glasses [2, 3, 4, 5]. Considerable progress has been made towards the understanding of the breakup of a thin filament into drops, although the exact details of the final stages of breakup are yet to be resolved. However, the evolution of the drop and filament from some initial configuration, and the influence of initial conditions on the final breakup, is still relatively unexplored and has been the focus of our attention for some time [6, 7]. Some work by others on this topic includes [8, 9].

The problem of interest is a drop of very viscous fluid hanging beneath a solid wall/boundary and extending under gravity, similar to honey dripping from an up-turned spoon. Analyses with and without inertia have been done and compared by the present authors [6, 7]. Surface tension was neglected in those studies, on the basis that a mean diameter $\ell = \sqrt{R_0 L_0}$ of the drop is large compared to the meniscus scale $\sqrt{\gamma/(\rho g)}$, or equivalently that the Bond number $Bo = \rho g \ell^2 / \gamma$ is large. Here g is the gravitational acceleration, ρ , γ are respectively the density and surface tension coefficient of the fluid, R_0 is a length scale for the drop's cross-section (e.g. the radius of the drop at the wall) and L_0 is the initial length of the drop. As the fluid filament extends and gets thinner, this neglect of surface tension may become less justifiable, and an examination of the effect of surface tension is desirable.

Because of the slender geometries involved, one-dimensional models are common in analysis of filament breakup [10, 11, 12, 13, 14, 15, 16]. However, the development of a drop and filament may also involve non-slender geometries at early times, requiring numerical solution of the full Navier-Stokes equations. Our previous work [6, 7] has involved both one-dimensional models and numerical solution of the Navier-Stokes equations for axisymmetric drops and 2D sheets.

For all of our work, a Lagrangian reference frame has been used, with grids that move with moving fluid elements. However, as the filament thins and surface tension potentially becomes important, Lagrangian numerics begin to fail due to the stretching of the grid. For example, in finite-element simulations of the full Navier-

*This work was supported an Australian Research Council Discovery Grant, DP0450047

[†]Applied Mathematics, University of Adelaide, Australia

Stokes equations [7], mesh elements in and near the filament region become excessively elongated or distorted, leading to loss of accuracy. Similarly, in one-dimensional models the grid points become sparse in the filament region while congregating in the main drop, so that we lose the ability to examine the development of the filament. Hence, if we are to better investigate the filament evolution, including possible effects of surface tension, we must modify our methods.

We have therefore developed a one-dimensional model in an Eulerian reference frame, where the Lagrangian coordinate (a fluid particle label equal to the initial distance ξ from the wall) is sought as a function of time t and that particle's physical distance x from the wall. This model may be derived directly from the Navier-Stokes and continuity equations, as described below. It may also be obtained (in the absence of surface tension) by a transformation of our previous one-dimensional Lagrangian model [7] for the cross-sectional area A as a function of time t and Lagrangian coordinate ξ , which will also be outlined here.

The resulting PDE for $\xi = Z(x, t)$ is formally of higher order in space than the original PDE for $A(\xi, t)$. Also, while the original problem could be solved in a fixed spatial domain $0 < \xi < L_0$ where L_0 is the initial drop length, the transformation results in a moving boundary problem in the domain $0 < x < L(t)$ where the actual drop length $L(t)$ must be determined as part of the problem. Both of these aspects mean that the problem in physical coordinates is considerably harder to solve than that in Lagrangian coordinates, but it has the major benefit that grid elements do not become stretched over time and is therefore worth pursuing in order to better understand the filament behaviour.

The increased complexity of the problem is fundamentally a result of the transformation employed, rather than arising from inclusion of surface tension, although the latter does add a further element of difficulty. Therefore, in this paper we explore the new model and its solution in the absence of surface tension, which will be considered in a future paper. We will, however, derive here the equations with surface tension included.

2. A one-dimensional Eulerian model. For an axisymmetric column of incompressible fluid, a one-dimensional lubrication approximation to the Navier-Stokes equations yields (see, for example, Eggers [13] or Senchenko and Bohr [16])

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} = g - \frac{\gamma}{\rho} \frac{\partial K}{\partial x} + \frac{\nu^*}{h^2} \frac{\partial}{\partial x} \left(h^2 \frac{\partial u}{\partial x} \right), \quad (2.1)$$

while the continuity equation becomes

$$(h^2)_t + (uh^2)_x = 0, \quad (2.2)$$

where subscripts denote derivatives, $\nu_* = 3\mu/\rho$ is the elongational (Trouton) kinematic viscosity [17] of a fluid with shear viscosity μ and density ρ , g is gravitational acceleration in the downwards (positive) direction, γ is the coefficient of surface tension, $u(x, t)$ is the downward velocity of the fluid at position x and time t , $h(x, t)$ is the radius of the drop and $K(x, t)$ is the curvature of the drop, given by

$$K = \frac{1}{\sqrt{1 + (h_x)^2}} \left[\frac{1}{h} - \frac{h_{xx}}{1 + (h_x)^2} \right]. \quad (2.3)$$

The cross-sectional area of the drop is given by $A = \pi h^2$, so equation (2.2) can be rewritten as

$$A_t + uA_x = -Au_x \quad (2.4)$$

and substituted into (2.1) to obtain

$$u_t + uu_x = g - \frac{\gamma}{\rho} K_x - \frac{\nu^*}{A} \frac{\partial}{\partial x} \left(\frac{\partial A}{\partial t} + u \frac{\partial A}{\partial x} \right)$$

or

$$\frac{Du}{Dt} = g - \frac{\gamma}{\rho} K_x - \frac{\nu^*}{A} \frac{\partial}{\partial x} \frac{DA}{Dt}, \quad (2.5)$$

where $D/Dt = \partial/\partial t + u \partial/\partial x$ denotes the material time derivative.

In a Lagrangian reference frame [6, 7, 12] we let $x = X(\xi, t)$, where ξ is a fluid-particle label such that $x = \xi$ at $t = 0$. The initial drop geometry is assumed to have a cross-sectional area distribution given by some function $A_0(\xi)$. That is, $A(\xi, 0) = A_0(\xi)$, $0 \leq \xi \leq L_0$, where $A(\xi, t)$ is the cross-sectional area at label ξ and time t , and L_0 is the initial drop length. Conservation of mass demands [7]

$$A \frac{\partial X}{\partial \xi} = A_0$$

or, on integration,

$$X(\xi, t) = \int_0^\xi \frac{A_0(\xi_1)}{A(\xi_1, t)} d\xi_1. \quad (2.6)$$

Now, defining $\xi = Z(x, t)$ we have

$$A = A_0 Z_x, \quad u = X_t = -\frac{Z_t}{Z_x} \quad \text{and} \quad \frac{\partial A_0}{\partial x} = A'_0 Z_x,$$

where primes denote differentiation with respect to ξ . Substituting for A and u in (2.5) gives

$$\begin{aligned} -\frac{D}{Dt} \left(\frac{Z_t}{Z_x} \right) &= g - \frac{\gamma}{\rho} K_x - \frac{\nu^*}{A_0 Z_x} \frac{\partial}{\partial x} \left[A_0 \frac{D}{Dt} (Z_x) \right] \\ &= g - \frac{\gamma}{\rho} K_x - \nu^* \left[\frac{A'_0}{A_0} \frac{D}{Dt} (Z_x) + \frac{1}{Z_x} \frac{\partial}{\partial x} \left(\frac{D}{Dt} (Z_x) \right) \right] \\ &= g - \frac{\gamma}{\rho} K_x - \nu^* \frac{D}{Dt} \left(\frac{A'_0}{A_0} Z_x + \frac{Z_{xx}}{Z_x} \right), \end{aligned} \quad (2.7)$$

with

$$\frac{D}{Dt} = \frac{\partial}{\partial t} - \frac{Z_t}{Z_x} \frac{\partial}{\partial x}.$$

The transformation to the dependent variable $Z(x, t)$ has yielded a PDE (2.7) which is second order in time and third order in space, whereas the Navier-Stokes equation (2.1) is first order in time and second order in space. We must also solve for the length of the drop $L(t) = X(L_0, t)$, which is increasing with time. Thus, to solve (2.7) we need two initial conditions and four boundary conditions. One initial condition is obtained from the definition of the Lagrangian coordinate such that $\xi = x$ at $t = 0$, so that

$$Z(x, 0) = x. \quad (2.8)$$

The other comes from the condition that the flow starts from rest, so $u(x, 0) = 0$ or

$$Z_t(x, 0) = 0. \quad (2.9)$$

With respect to boundary conditions, two (one at each end) come from the definition of the Lagrangian coordinate such that $x = 0$ at $\xi = 0$ and $x = L(t)$ at $\xi = L_0$, giving

$$Z(0, t) = 0, \quad (2.10)$$

$$Z(L(t), t) = L_0. \quad (2.11)$$

Since the drop is falling from under a solid plane boundary where the normal velocity is zero for all time, i.e. $u = 0$ at $x = 0$, then $Du/Dt = 0$ at $x = 0$ and hence, from equation (2.7),

$$0 = g - \frac{\gamma}{\rho} K_x - \nu^* \frac{D}{Dt} \left(\frac{A'_0}{A_0} Z_x + \frac{Z_{xx}}{Z_x} \right) \quad \text{at } x = 0. \quad (2.12)$$

We require a further boundary condition which comes from a balance between viscous stresses and surface tension at the bottom of the drop $x = L(t)$, namely

$$\frac{\partial}{\partial x} \left(\frac{Z_t}{Z_x} \right) = -\frac{\gamma}{\mu} K \quad \text{or, equivalently,} \quad \frac{D}{Dt} (Z_x) = -\frac{\gamma}{\mu} K Z_x. \quad (2.13)$$

Equation (2.7) subject to initial and boundary conditions (2.8)-(2.13) describes the fall of a drop of viscous fluid from underneath a solid boundary, starting from a known initial configuration. Gravitational, viscous, inertial and surface tension effects are all included. The model derived involves the fluid-particle label $\xi = Z(x, t)$ as the dependent variable, with the physical space coordinate x and time t as the independent variables.

For zero surface tension ($\gamma = 0$), equation (2.7) simplifies considerably, by integration with respect to the material time derivative. With non-zero surface tension ($\gamma \neq 0$) such a procedure is computationally problematic due to the necessity of time-integrating the surface-tension term while holding the particle label $\xi = Z(x, t)$ constant. We leave consideration of this matter to a future paper and, from here on, neglect surface tension (i.e. set $\gamma = 0$). Integration with respect to t at fixed $\xi = Z$, subject to $Z = x$ and $Z_t = 0$ at $t = 0$, then yields

$$-\frac{Z_t}{Z_x} = gt - \nu^* \left(\frac{A'_0}{A_0} (Z_x - 1) + \frac{Z_{xx}}{Z_x} \right)$$

or

$$Z_t = \nu^* Z_{xx} - gt Z_x - \nu^* \frac{A'_0(Z)}{A_0(Z)} Z_x (1 - Z_x). \quad (2.14)$$

Equation (2.14) is in general a non-linear PDE which, like the Navier-Stokes equation (2.1), is first order in time and second order in space. It is worth noting in passing that in the special case of an initially-cylindrical drop where $A_0 = \text{constant}$, it becomes linear, and in the further special case where gravity can be neglected (such as in a liquid bridge problem [18]), it reduces to the ordinary linear heat-conduction equation, with diffusivity ν^* .

The appropriate initial and boundary conditions are

$$\begin{aligned} Z(x, 0) &= x & \text{at } t = 0, \\ Z(0, t) &= 0 & \text{at } x = 0, \\ Z(L(t), t) &= L_0 & \text{at } x = L(t), \\ Z_x(L(t), t) &= 1 & \text{at } x = L(t). \end{aligned} \quad (2.15)$$

Note that we no longer need boundary condition (2.12) which, in integrated form is equivalent to $u = 0$ at $x = 0$, and which is automatically satisfied by demanding $Z(0, t) = 0$. Also, with $\gamma = 0$, (2.13) can be integrated with respect to the material time derivative to give $Z_x = 1$ at $x = L(t)$ as we have in (2.15).

The Lagrangian equivalent to (2.14) in terms of the cross-sectional area $A(\xi, t)$ as a function of Lagrangian coordinate ξ and time t is readily (by manipulation of (2.14)) shown to be

$$u = gt - \frac{\nu^*}{A_0} \frac{\partial}{\partial \xi} (A - A_0).$$

Differentiating with respect to ξ , using (2.6) and rearranging gives

$$\frac{\partial A}{\partial t} = \nu^* \frac{A^2}{A_0} \frac{\partial}{\partial \xi} \left(\frac{1}{A_0} \frac{\partial}{\partial \xi} (A - A_0) \right), \quad 0 \leq \xi \leq L_0. \quad (2.16)$$

The corresponding initial and boundary conditions are

$$A(\xi, 0) = A_0(\xi), \quad \frac{\partial}{\partial \xi} (A - A_0)(0, t) = \frac{gt}{\nu^*} A_0(0), \quad A(L_0, t) = A_0(L_0). \quad (2.17)$$

The Lagrangian model given by (2.16) and (2.17) was derived directly in [7] by balancing viscous and gravitational forces; the inertialess version was considered in [6]. Comparison between solutions to these models and those for the new Eulerian model of present interest, (2.14), (2.15), will be given below. We note that the Eulerian model involves gravity explicitly in the PDE (2.14), whereas the Lagrangian model involves gravity only in a boundary condition at $\xi = 0$ (2.17).

3. Eulerian-model solution. For the remainder of this paper, we will be primarily interested in initially paraboloidal slender drops, given in Lagrangian coordinates by $A_0(\xi) = A_0(0)(1 - \xi/L_0)$ with small aspect ratio $\alpha_r = \sqrt{A_0(0)}/L_0 \ll 1$, as considered in [7].

Defining dimensionless variables (denoted by bars)

$$\bar{A}_0(\bar{\xi}) = \frac{A_0(\xi)}{A_0(0)}, \quad \bar{\xi} = \bar{Z} = \frac{\xi}{L_0} = \frac{Z}{L_0}, \quad \bar{x} = \frac{x}{L_0}, \quad \bar{t} = \frac{gL_0}{\nu^*} t, \quad (3.1)$$

the dimensionless form of (2.14) for the initially paraboloidal drop $\bar{A}_0(\bar{Z}) = 1 - \bar{Z}$ is (after removing the bars)

$$Re Z_t = Z_{xx} - t Z_x + \frac{Z_x}{1 - Z} [1 - Z_x], \quad (3.2)$$

with the Reynolds number Re given by

$$Re = \frac{gL_0^3}{\nu^{*2}}.$$

The initial and boundary conditions (2.15) become

$$Z(x, 0) = x, \quad Z(0, t) = 0, \quad Z(L(t), t) = 1 \quad \text{and} \quad Z_x(L(t), t) = 1. \quad (3.3)$$

Equation (3.2) subject to (3.3) is most easily solved using the explicit forward-time-centred-space finite difference method. Setting the time step Δt and spatial step Δx , we approximate (3.2) in the usual manner by

$$\begin{aligned} Re \frac{Z_i^{j+1} - Z_i^j}{\Delta t} = & \frac{Z_{i+1}^j - 2Z_i^j + Z_{i-1}^j}{\Delta x^2} - t \frac{Z_{i+1}^j - Z_{i-1}^j}{2\Delta x} \\ & + \frac{1}{1 - Z_i^j} \frac{Z_{i+1}^j - Z_{i-1}^j}{2\Delta x} \left[1 - \frac{Z_{i+1}^j - Z_{i-1}^j}{2\Delta x} \right], \end{aligned} \quad (3.4)$$

where $Z_i^j = Z(x_i, t_j)$ is the value of $Z(x, t)$ at the j^{th} time step and the i^{th} grid point. For numerical stability, we must ensure that the diffusion number $\Delta t / Re(\Delta x)^2 < 0.5$.

The initial and wall boundary conditions are easily specified by setting $Z_i^0 = i\Delta x$ and $Z_0^j = 0$. However, the boundary conditions at the free end are not quite so straightforward to implement, due to the moving boundary. At each time step, the drop becomes longer and some of the drop (at the bottom) will move beyond the current computational domain. Hence we need to extend the grid to the new position of the bottom of the drop.

The most obvious and generally applicable way to do this is by a linear extrapolation from the bottom-most known grid point, using the boundary condition $Z_x = 1$. Specifically if x_{N_j} is the grid point at the bottom of the computational grid at the j th time step, then forward differencing in space yields

$$Z_x(x_{N_j}, t_j) = \frac{Z_{N_j+1}^j - Z_{N_j}^j}{\Delta x} = 1 \quad \text{or} \quad Z_{N_j+1}^j = Z_{N_j}^j + \Delta x.$$

This expression for $Z_{N_j+1}^j$ is substituted into (3.4) so as to compute $Z_{N_j}^{j+1}$. Then we compute $Z_{N_j+k}^{j+1} = Z_{N_j+k-1}^{j+1} + \Delta x$, $k = 1, 2, \dots$, stopping when $Z_{N_j+k}^{j+1} > 1$. This method can be applied for any arbitrary initial drop shape, but because the boundary condition $Z_x = 1$ is, strictly, applied over a small region at the bottom of the drop, and not just at $x = L(t)$, it tends to result in a reduction in the overall length of the drop. However, typically, only one or two points are added to the grid in this manner and accuracy improves as Δx is decreased.

An alternative method, is to extrapolate the bottom of the drop using the solution from the corresponding Lagrangian model neglecting inertia. Earlier work [6, 7] has shown that, with neglect of surface tension, the drop shape very near to the bottom is given quite accurately by the inertialess solution. This is because in early time accelerations are very small and Stokes flow solutions are applicable; at later times, the main drop is essentially in free fall and (with neglect of surface tension) does not change in shape. Furthermore, for some initial configurations, including the initially paraboloidal drop considered here, we can obtain an exact analytic solution to the Lagrangian model neglecting inertia and use this to assign appropriate values of $Z(x, t)$ to the new grid points. Specifically, using (3.1), the dimensionless form of the Lagrangian PDE (2.16) is (after removing the bars)

$$Re \frac{\partial A}{\partial t} = \frac{A^2}{A_0} \frac{\partial}{\partial \xi} \left(\frac{1}{A_0} \frac{\partial}{\partial \xi} (A - A_0) \right), \quad 0 \leq \xi \leq 1, \quad (3.5)$$

with initial and boundary conditions

$$A(\xi, 0) = A_0(\xi), \quad \frac{\partial}{\partial \xi}(A - A_0)(0, t) = t, \quad A(1, t) = A_0(1, t). \quad (3.6)$$

In the inertialess limit ($Re = 0$) this has the explicit solution

$$A(\xi, t) = A_0(\xi) - tV(\xi), \quad V(\xi) = \int_{\xi}^1 A_0(\xi_1) d\xi_1. \quad (3.7)$$

As discussed in Stokes *et. al.* [6], the cross-sectional area of the drop vanishes at the position $\xi = \xi_*$ such that $t = t_* = A_0(\xi_*)/V(\xi_*)$ is a minimum, so that the drop formally breaks with $A(\xi_*, t_*) = 0$. The time t_* is the “crisis” time; at this time the length of the drop, given by (2.6) with $\xi = 1$, formally becomes infinite in this inertialess approximation. No solution exists for $t > t_*$, i.e. we have a finite-time blow up at the crisis time t_* . However, for larger times $t > t_*$ the main drop is effectively falling as a solid body, and in the absence of surface tension it retains the same shape given by (3.7) with $t = t_*$.

For the initially paraboloidal drop $A_0(\xi) = 1 - \xi$, equation (3.7) becomes

$$A(\xi, t) = (1 - \xi) \left(1 - \frac{1}{2}t(1 - \xi) \right), \quad (3.8)$$

from which we see that $\xi_* = 0$ and $t_* = 2$, i.e. the drop breaks at the wall at the crisis time $t = 2$. Hence, for all $t \geq 2$,

$$A(\xi) = \xi(1 - \xi) \quad (3.9)$$

which is a solution to equation (3.5). It is readily verified using $Z_x = A/A_0$ that (3.8) satisfies the condition $Z_x = 1$ at $x = L(t)$ (i.e. $\xi = 1$) for all $t \leq 2$. Hence we may use (3.8) for $t < 2$ and (3.9) for $t \geq 2$ with the present Eulerian model to extrapolate the bottom of the drop, as necessary, beyond the current computational domain. Figure 3.1(a) compares the drop shape at $t = 1.5$ given by the inertialess solution (3.8) and as found by solving (3.5) with Reynolds number $Re = 0.1$ using the implicit backward-time centred-space finite-difference method; also shown is the large- (i.e. crisis) time inertialess solution (3.9) which is indistinguishable from the solution to (3.5) at $Re = 0.1$, $t = 4$. Figure 3.1(b) shows the percentage relative difference between solutions to (3.5) at Reynolds number $Re = 0.1$ and the inertialess solution at different times. At the very bottom of the drop, the relative difference is much less than 1%. Thus, the inertialess solution is an accurate representation of the very bottom of the drop over all time, and can be used to accommodate the moving boundary condition as proposed.

For the paraboloidal drop of interest here, the extrapolation is performed by substituting $A_0 = 1 - Z$, and $A(Z, t)$ given by (3.8) for $t < 2$ or (3.9) for $t \geq 2$, into $Z_x = A/A_0$ and integrating, yielding

$$Z(x, t) = \begin{cases} 1 - \frac{2}{t} + c(t) e^{xt/2} & \text{for } 0 < t < 2, \\ c(t) e^x & \text{for } t \geq 2. \end{cases} \quad (3.10)$$

For a computational domain of $N_j + 1$ gridpoints $x_0, x_1, \dots, x_{N_j}$ at the j^{th} time step, we compute Z_i^{j+1} , $i = 1, 2, \dots, N_j - 1$ using (3.4). We then solve for the value

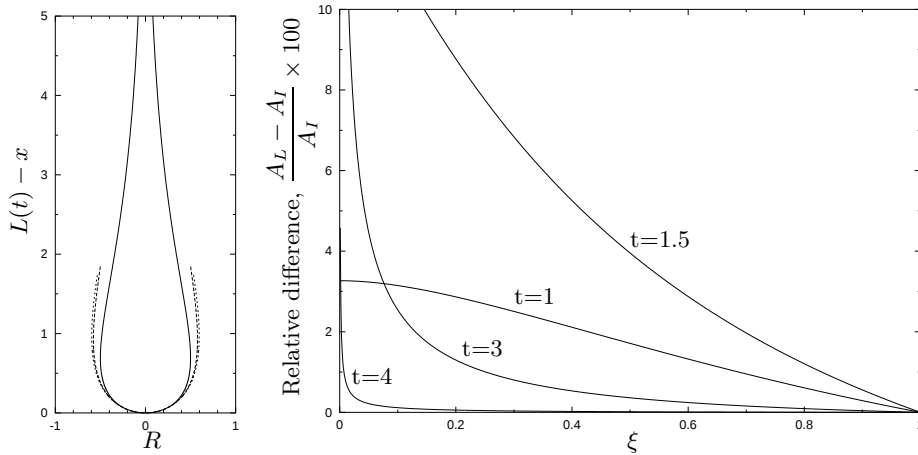


FIG. 3.1. (a) Drop shape as a function of distance $L(t) - x$ from the bottom of the drop. Inertialess solution (3.8) at $t = 1.5$ (dashed); solution to the Lagrangian PDE (3.5) at $t = 1.5$ (dotted) and $t = 4.0$ (solid); the inertialess large-time solution (3.9) is indistinguishable from the solid curve. (b) Percentage relative difference between the solution to the Lagrangian PDE (3.5) and the inertialess solution (3.8) for $t < 2$ or (3.9) for $t \geq 2$. The percentage relative difference is calculated as $100 \times (A_L - A_I)/A_I$ where A_L is the calculated solution to (3.5) and A_I is the inertialess solution (3.8) or (3.9). ($Re = 0.1$, $\Delta\xi = 10^{-3}$, $\Delta t = 10^{-3}$).

of the unknown function of time $c(t)$ at time t_{j+1} using the just computed value $Z_{N_j-1}^{j+1} = Z(x_{N_j-1}, t_{j+1})$ and equation (3.10). The computed value of $c(t_{j+1})$ is then used in (3.10) to calculate values of $Z_{N_j+k}^{j+1}$, $k = 0, 1, \dots$, stopping when $Z_{N_j+k}^{j+1} > 1$, so extending the computational domain to N_{j+1} grid points. To calculate the actual position of the bottom of the drop, we can interpolate between the bottom-most two grid points $Z_{N_{j+1}-1}^{j+1} < 1$ and $Z_{N_{j+1}}^{j+1} > 1$, to estimate the value of x for which $Z = 1$.

Having determined the Lagrangian coordinate $Z(x, t)$ over the new, extended, computational domain, the actual shape of the drop can be calculated via $R = \sqrt{A} = \sqrt{A_0 Z_x}$.

4. Results and comparison between Eulerian and Lagrangian models.

The numerical solution to equation (3.2) for the particle label $Z(x, t)$ as a function of physical space and time is shown, for Reynolds number $Re = 0.1$, in Figure 4.1. The growth of the computational domain as a result of the moving boundary at $Z = 1$ can be clearly seen.

The axisymmetric drop shape is shown in Figure 4.2(a), alongside drop shapes from the numerical solution to the Lagrangian equation (3.5), Figure 4.2(b). The solution to equation (3.5) was calculated using the implicit backward-time-centred-space finite-difference method. The two different models produce the same drop shapes with the same overall length; however there are some differences to be highlighted.

Firstly, for times $t \gtrsim 2.6$ the computed solutions to the Lagrangian model (Figure 4.2(b)) appear to move away from the wall. This is due to stretching of the grid and a consequent loss of gridpoints in the filament region and accumulation of gridpoints in the main drop below the filament, as seen in Figure 4.3(b). The fluid particle that is initially a distance $x = \Delta\xi$ from the wall (i.e. the closest point to the wall for which we calculate $A(\xi, t)$), falls ever downwards so that there is a continually lengthening region in physical space, which is essentially the fluid filament connecting the drop to

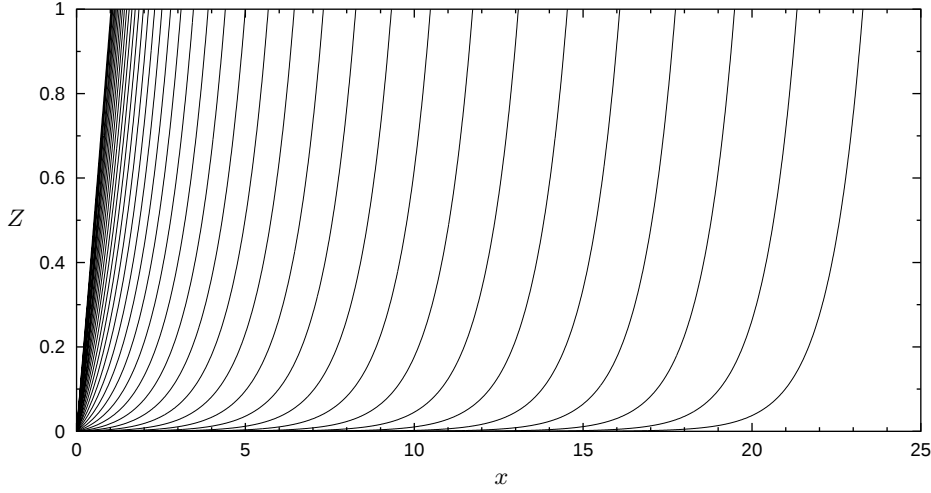


FIG. 4.1. *Solution to PDE (3.2) for $Z(x, t)$, with $Re = 0.1$, at times $t = 0, 0.1, \dots, 3.9, 4.0$. $\Delta x = 10^{-2}$, $\Delta t = 4 \times 10^{-6}$.*

the wall, about which we know virtually nothing. Unfortunately, it is in this filament region that our greatest interest lies, since this is where the drop will eventually break. While decreasing the grid spacing near the wall will extend the time over which we have near complete information, there will always come a time (soon after the crisis time t_* of the inertialess theory, when accelerations approach gravitational acceleration) when the grid becomes too stretched in the filament region. This loss of information in the filament region is completely overcome with the Eulerian model (Figure 4.2) because gridpoints are fixed in space and the grid constantly extended as the drop length increases. This leads to a uniform spacing of gridpoints over the full length of the drop as seen in Figure 4.3(a). The greater knowledge of the filament region that results from the Eulerian model will better enable a future study of the effect of surface tension on filament breakup and drop pinch-off.

A second point of difference between the Eulerian and Lagrangian models is with respect to the behaviour near the wall boundary at $x = \xi = 0$. At this boundary, the Lagrangian boundary condition (3.6) for the initially paraboloidal drop is

$$\frac{\partial A}{\partial \xi}(0, t) + 1 = t. \quad (4.1)$$

For the Lagrangian model it is a simple matter to check that this boundary condition is indeed satisfied, by computing $A_\xi(0, t)$ using the forward-space finite-difference formula, i.e.

$$A_\xi(0, t) = \frac{A(\Delta\xi, t) - A(0, t)}{\Delta\xi}.$$

The value of $A_\xi(0, t) + 1$ so computed is plotted against time t in Figure 4.4 (solid curve). The wall boundary condition is satisfied until $t \approx 2.0$, and then begins to move away from it. At $t \approx 2.4$ there is a rapid deviation from the correct solution as the value of $A_\xi(0, t)$ decreases and appears to approach a constant unit value. This highlights the fact that the Lagrangian solution cannot be relied upon at large times when the grid becomes excessively stretched in physical space.

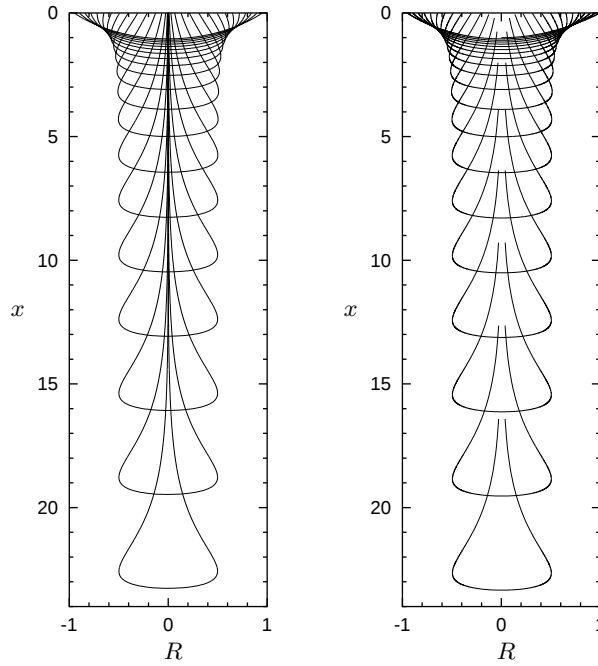


FIG. 4.2. Drop shapes for $Re = 0.1$ at times $t = 0, 0.2, \dots, 3.8, 4.0$. (a) Shape calculated using Eulerian framework, equation (3.2) ($\Delta x = 10^{-2}$, $\Delta t = 4. \times 10^{-6}$). (b) Shape calculated using Lagrangian framework, equation (3.5) ($\Delta \xi = 10^{-3}$, $\Delta t = 10^{-3}$).

The equivalent condition on $A_\xi(0, t)$ for the Eulerian model is obtained by differentiating $A = A_0 Z_x$ with respect to ξ , i.e. (for the initially paraboloidal drop)

$$\begin{aligned} A_\xi &= A'_0 Z_x + \frac{A_0 Z_{xx}}{Z_x} \\ &= -Z_x + (1 - Z) \frac{Z_{xx}}{Z_x}. \end{aligned}$$

The slope, A_ξ at the wall can thus be found from the calculated values of $Z(0, t)$, $Z(\Delta x, t)$ and $Z(2\Delta x, t)$ using first-order forward-space finite-difference formulae for Z_x and Z_{xx} , i.e.

$$Z_x(0, t) = \frac{Z(\Delta x, t) - Z(0, t)}{\Delta x} \quad \text{and} \quad Z_{xx}(0, t) = \frac{Z(2\Delta x, t) - 2Z(\Delta x, t) + Z(0, t)}{\Delta x^2}.$$

Figure 4.4 (dashed line) shows that $A_\xi + 1 \sim t$ for times well beyond $t = 2.4$, i.e. the wall boundary condition (4.1) is satisfied. Thus, we see that, for large times, the solution obtained from the Eulerian model is more reliable than that obtained from the Lagrangian model, especially in the filament region.

This is also shown by Figures 4.5 and 4.6. Figure 4.5 shows the relative differences between the inertialess prediction (3.8) of the drop/filament radius ($R = \sqrt{A}$) and solutions at $Re = 0.1$ to the Lagrangian and Eulerian models, as a function of physical distance x from the upper wall boundary, at time $t = 1.5$ before the crisis time of inertialess theory. There is excellent agreement between the Lagrangian and Eulerian models at this time, with a difference only visible at the very bottom of the drop.

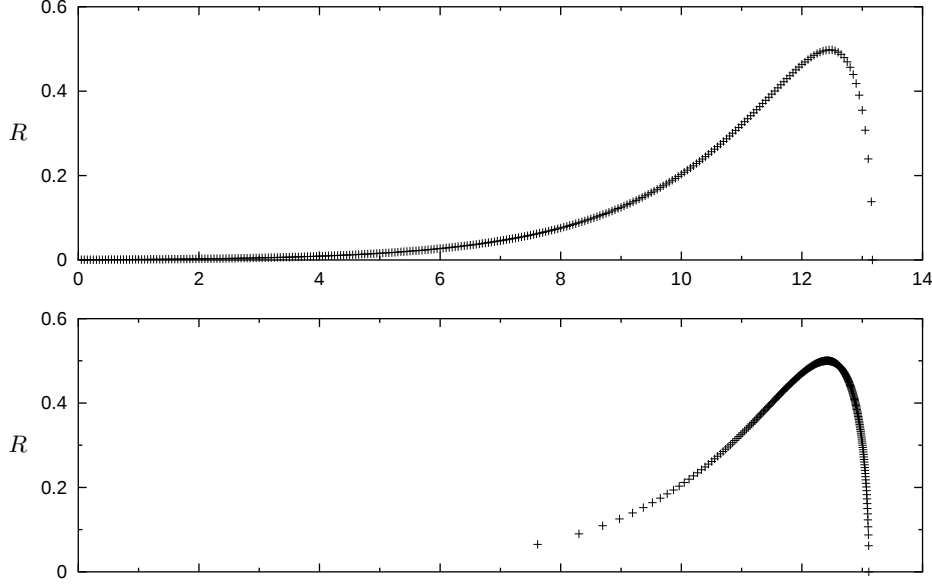


FIG. 4.3. Comparison of Lagrangian and Eulerian solutions methods at $t = 3.4$. Each figure has approximately 260 grid points. (a) Drop shape calculated using the Eulerian model (3.2), (3.3) ($\Delta x = 5 \times 10^{-2}$, $\Delta t = 10^{-4}$). (b) Drop shape calculated using the Lagrangian model (3.5), (3.6) ($\Delta x = 1/260$, $\Delta t = 10^{-3}$). The extra grid points in the filament region of the Eulerian model can be clearly seen.

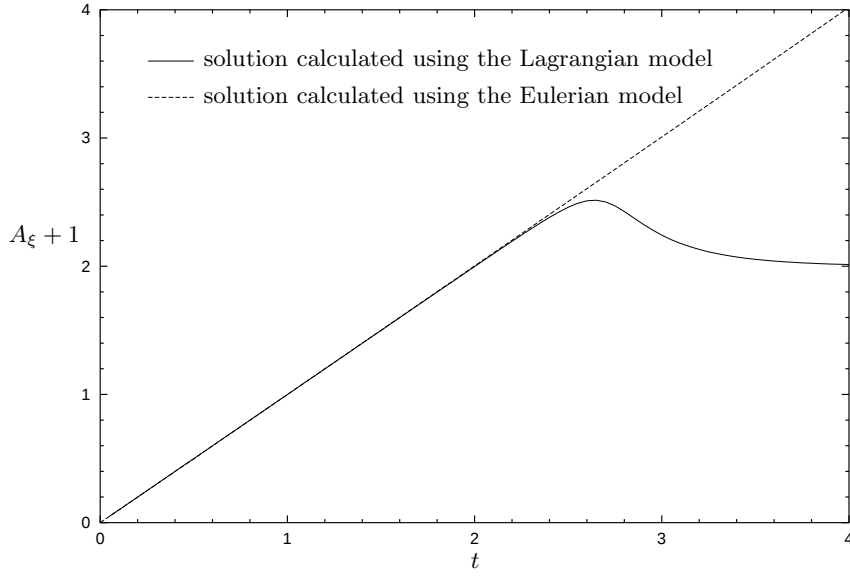


FIG. 4.4. The accuracy of the Lagrangian and Eulerian models as indicated by the wall boundary condition (3.6)₂. For an initially paraboloidal drop we require $A_\xi + 1 \sim t$. This condition is satisfied by the Eulerian model, but not the Lagrangian model.

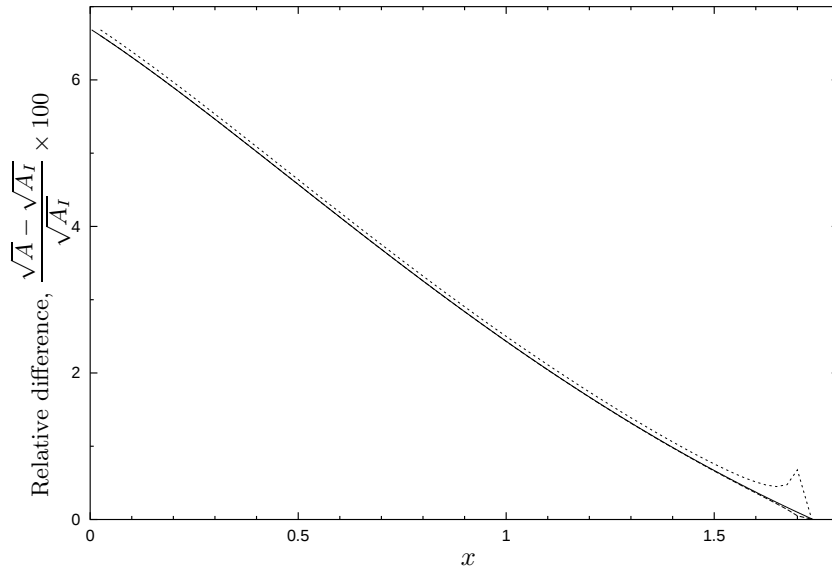


FIG. 4.5. Percentage relative differences at $t = 1.5$ between the inertialess radius $\sqrt{A_I}$ with A_I given by (3.8), and Lagrangian and Eulerian solutions with $Re = 0.1$. The difference is given by $100 \times (\sqrt{A} - \sqrt{A_I})/\sqrt{A_I}$ where A denotes the Lagrangian solution (solid), the Eulerian solution with extension of the computational domain using the inertialess solution at crisis time (dashed), and the Eulerian solution with extension of the computational domain using the forward-difference representation of $Z_x(L(t), t) = 1$ (dotted).

Figure 4.6 gives the same comparisons but at time $t = 4$, well after the crisis time of inertialess theory. Now we see considerably more difference between the Lagrangian and Eulerian solutions, which is due to error in the Lagrangian solution resulting from an excessively stretched grid. Note also that grid stretching limits our comparison to the bottom third of the drop where the Lagrangian solution is available; in the region $0 \leq x < 16$ no information is available from the Lagrangian solution due to a lack of gridpoints.

For interest, Figures 4.5 and 4.6 also show results for the Eulerian solution obtained using the finite-difference approximation to the boundary condition $Z_x = 1$ at $x = L(t)$, discussed earlier as an alternative to pasting of the inertialess solution to the bottom of the drop. This differs from the other curves by only about 0.1% over most of the drop length, with the difference increasing to about 1% at the very bottom; note that the overall drop length is slightly less, as mentioned earlier, although it is not noticable with the grid size used here or at the scales shown.

It is interesting to note that the time at which the numerical solution to (3.5) begins to become inaccurate in the filament region (as indicated by Figure 4.4) is approximately equal to the crisis time of inertialess theory, as predicted in [6] ($t_* = 2$), when accelerations increase rapidly up to gravitational acceleration. This correlation between the inertialess crisis time and the time at which the Lagrangian solution becomes inaccurate is also observed with other initial drop shapes.

5. Discussion and conclusions. The major benefit of reformulating the extensional-flow problem using an Eulerian framework is that, in contrast to other one-dimensional Lagrangian models, we now include many grid points in the filament region. This

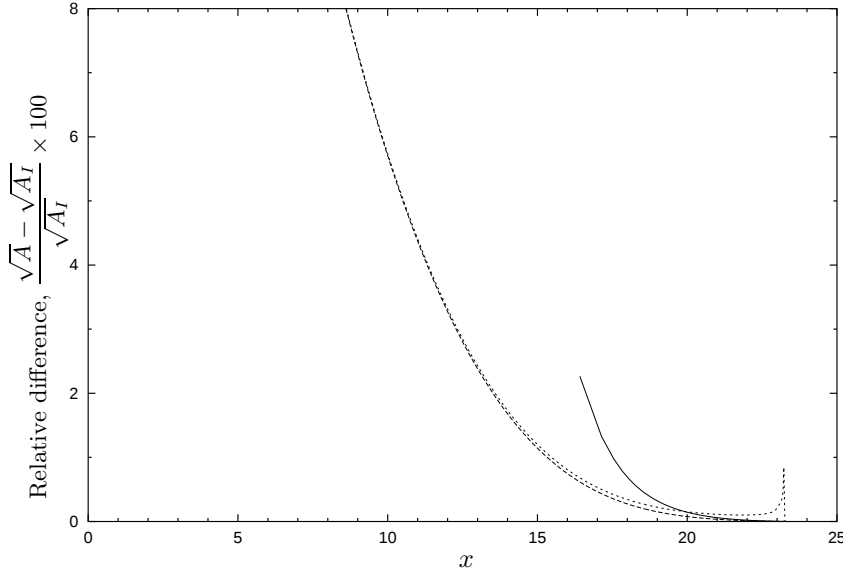


FIG. 4.6. As for Figure 4.5 but at time $t = 4$ with A_I given by the inertialess large-time solution (3.9).

greater resolution enables us to better study the dynamics of the developing filament. In particular we are now much better equipped to investigate the effects of surface tension on the filament, the drop shape and pinch-off of the main drop by solving equation (2.7) with $\gamma \neq 0$. This will be considered in a future paper.

Meanwhile, reformulating the problem also enables us to address a question previously posed in Stokes and Tuck [7]. In that paper, we saw that at small Reynolds numbers and large times, the main part of the drop is indistinguishable from a solid object that fell from rest at an apparent time t_0 . Identification of this apparent time with the crisis time of inertialess theory leads to the conclusion that the large-time drop shape is the drop shape obtained at the crisis time when neglecting inertia. Conversely, it can be shown that equating the large-time drop shape at small Reynolds numbers with the drop shape at the crisis time of inertialess theory, which is strongly supported by the numerical solutions (both here and in [7]), implies that the apparent time t_0 and the crisis time t_* are identical. This relationship between the inertialess theory and the large-time limit of the flow with inertia implies the expected large-time shape for an initially paraboloidal drop [7]

$$A(x, t) = e^{-(L-x)} \left[1 - e^{-(L-x)} \right], \quad (5.1)$$

where $L = L(t)$ is the length of the drop at time t . However, the asymptotic theory described in [7] did not provide an estimate of the actual length $L(t)$ of the drop. We can now supply that estimate.

In the physical coordinate system, the cross-sectional area of the drop is given by $A(x, t) = A_0 Z_x$. The expected large-time drop shape obtained from the inertialess theory, for the initially paraboloidal drop, is given by (3.10)₂ $Z(x, t) = c(t)e^x$, so that

$$\begin{aligned} A(x, t) &= (1 - Z)Z_x \\ &= (1 - c(t)e^x)c(t)e^x. \end{aligned} \quad (5.2)$$

Comparing this with (5.1), we see that

$$c(t) = e^{-L(t)} \quad \text{or} \quad L(t) = -\ln c(t). \quad (5.3)$$

Furthermore, since (3.10)₂ must be a solution to the PDE in physical coordinates, we may substitute it into (3.2) to obtain a first-order differential equation for $c(t)$. Upon solving this, we find

$$c(t) = \exp \left[-\frac{1}{2Re}(t-2)^2 - \tilde{L}_0 \right] \quad (5.4)$$

where $\tilde{L}_0$ is a constant. The length of the drop at large times is then given by

$$L(t) = \frac{1}{2Re}(t-2)^2 + \tilde{L}_0, \quad (5.5)$$

and the velocity of the bottom of the drop can be found by differentiating to give

$$L'(t) = \frac{1}{Re}(t-2). \quad (5.6)$$

The constant $\tilde{L}_0$ is seen to be the apparent initial length of the drop at the crisis time $t_* = 2$ of inertialess theory when the main drop essentially enters free fall from rest. That is, at later times, the bottom of the drop falls as if it was dropped from rest at time t_* with apparent initial length $\tilde{L}_0$.

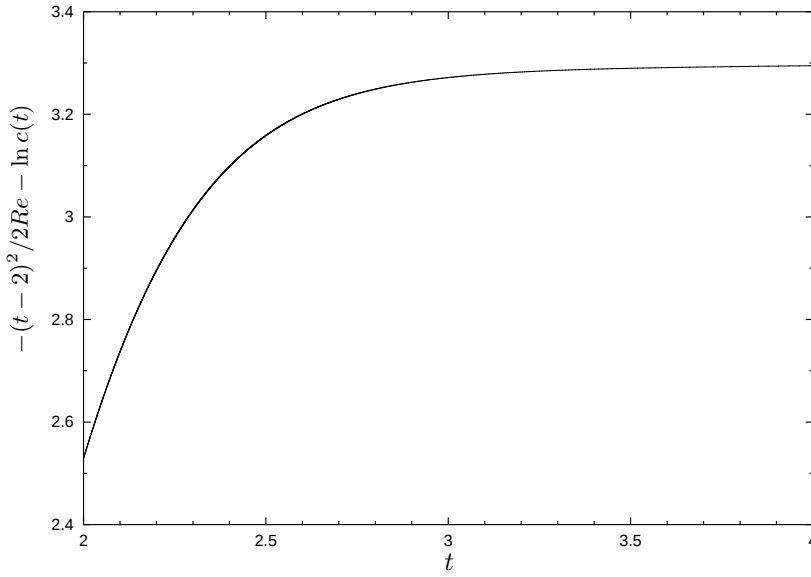


FIG. 5.1. Plot of the function $-(t-2)^2/(2Re) - \ln c(t)$ at $Re = 0.1$. The apparent drop length $\tilde{L}_0$ is given by the large-time value of this function, i.e. we have $\tilde{L}_0 \approx 3.3$.

Our solutions of the Eulerian model for initially paraboloidal slender drops involves computation of the function $c(t)$ for extension of the computational domain. Then, at large time, an approximate value for the apparent initial length is given by

$$\tilde{L}_0 = -\frac{1}{2Re}(t-2)^2 - \ln c(t).$$

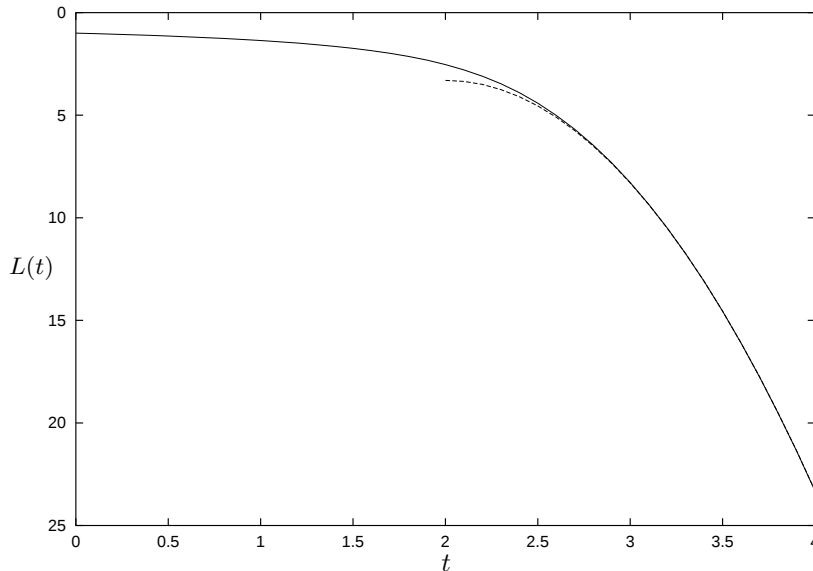


FIG. 5.2. Overall drop length $L(t)$ as found by solving equation (3.2) (solid), and as predicted at large times $t > 2$ by (5.5) with $\tilde{L}_0 = 3.3$ (dashed).

With Reynolds number $Re = 0.1$, we find $\tilde{L}_0 \approx 3.3$ (see Figure 5.1). Figure 5.2 shows the length of the drop found by solving equation (3.2) in comparison with the predicted length at large times (5.5) with $\tilde{L}_0 = 3.3$.

One final point of interest is that the large-time drop (5.1) (Lagrangian coordinates) or (5.2) (Eulerian coordinates), which derives from the inertialess large-time drop shape (3.9) is observed to be a good representation for the main body of the drop and the lower portion of the filament, as seen by a comparison of Figures 4.6 and 4.2(a); the inertialess large- (crisis) time solution is accurate to within 1% over $x > 15$ (see Figure 4.6), which we see from Figure 4.2(a) is over the bottom third of the drop and filament at this time. The inertialess solution is less accurate in the upper filament region which is to be expected since inertia and viscous fluid flow are significant in this region of transition from rigid body motion (at increasing velocity) back to zero velocity at the wall; the inertialess solution can only be justified at early time when accelerations are much smaller than gravity, or, at larger times in the main drop region which is falling as a rigid body.

Acknowledgments. Financial support from an Australian Research Council Discovery Project grant (DP0450047) is gratefully acknowledged, as are valuable discussions with Prof P. Broadbridge.

REFERENCES

- [1] J. EGGERS, *Nonlinear dynamics and breakup of free surface flows*, Rev. Mod. Phys., 69 (1997), pp. 865–929.
- [2] J. DE WYNNE, J.R. OCKENDON, AND P. WILMOTT, *On a mathematical model for fiber tapering*, SIAM J. Appl. Math., 49 (1989), pp. 983–990.
- [3] P.J. DOYLE, *Glass Making Today*. R.A.N. Publishers, Ohio, 1994.
- [4] J.E. MATTA, AND R.P. TITUS, *Liquid stretching using a falling cylinder*, J. Non-Newton. Fluid, 35 (1990), pp. 215–229.

- [5] T. SRIDHAR, V. TIRTAATMADJA, D.A. NGUYEN, AND R.K. GUPTA, *Measurement of extensional viscosity of polymer solutions*, J. Non-Newton. Fluid, 40 (1991), pp. 271–280.
- [6] Y.M. STOKES, E.O. TUCK, AND L.W. SCHWARTZ, *Extensional fall of a very viscous fluid drop*, Q. J. Mech. Appl. Math., 53 (2000), pp. 565–582.
- [7] Y.M. STOKES, AND E.O. TUCK, *The role of inertia in extensional fall of a viscous drop*, J. Fluid Mech., 498 (2004), pp. 205–225.
- [8] D.F. ZHANG, AND H.A. STONE, *Drop formation in viscous flows at a vertical capillary tube*, Phys. Fluids, 9 (1997), pp. 2234–2242.
- [9] E.D. WILKES, S.D. PHILLIPS, AND O.A. BASARAN, *Computational and experimental analysis of dynamics of drop formation*, Phys. Fluids, 11 (1999), pp. 3577–3598.
- [10] M.A. MATOVICH, AND J.R.A. PEARSON, *Spinning a molten threadline*, I&EC Fundamentals, 8 (1969), pp. 512–520.
- [11] L.E. CRAM, *A numerical model of droplet formation*, in Computational Techniques & Applications: CTAC-83, J. Noye and C. Fletcher, eds., Elsevier Science Publishers B.V., North-Holland, 1984, pp. 182–188.
- [12] S.D.R. WILSON, *The slow dripping of a viscous fluid*, J. Fluid Mech., 190 (1988), pp. 561–570.
- [13] J. EGGERS, *Universal pinching of 3D axisymmetric free surface flow*, Phys. Rev. Lett. 71 (1993), pp. 3458–3460.
- [14] J. EGGERS, AND T.F. DUPONT, *Drop formation in a one-dimensional approximation of the Navier-Stokes equation*, J. Fluid Mech., 262 (1994), pp. 205–221.
- [15] D. VAYNBLAT, J.R. LISTER, AND T.P. WITELSKI, *Symmetry and self-similarity in rupture and pinchoff: a geometric bifurcation*, Eur. J. Appl. Math., 12 (2001), pp. 209–232.
- [16] S. SENCHENKO, AND T. BOHR, *Shape and stability of a viscous thread*, Phys. Rev. E, 71 (2005), pp. 56301.
- [17] F.T. TROUTON, *On the coefficient of viscous traction and its relation to that of viscosity*, Proc. Roy. Soc. A, 77 (1906), pp. 426–440.
- [18] P. CONCUS, R. FINN, AND J. MCCUAN, *Liquid bridges, edge blobs, and Scherk-type capillary surfaces*, Indiana U. Math. J., 50 (2001), pp. 411–441.