

A Century of Robotic Hands

C. Piazza,¹ G. Grioli,² M.G. Catalano,² and A. Bicchi^{1,2}

¹Centro di Ricerca “E. Piaggio” and Dipartimento di Ingegneria Informatica, Università di Pisa, 56122 Pisa, Italy; email: cristina.piazza@ing.unipi.it

²Soft Robotics for Human Cooperation and Rehabilitation, Istituto Italiano di Tecnologia, 16163 Genova, Italy

Annu. Rev. Control Robot. Auton. Syst. 2019. 2:1–32

The *Annual Review of Control, Robotics, and
Autonomous Systems* is online at
control.annualreviews.org

<https://doi.org/10.1146/annurev-control-060117-105003>

Copyright © 2019 by Annual Reviews.
All rights reserved

**ANNUAL
REVIEWS CONNECT**

www.annualreviews.org

- Download figures
- Navigate cited references
- Keyword search
- Explore related articles
- Share via email or social media

Keywords

grasping, manipulation, robotic hands, artificial hands, soft hands

Abstract

This article reports on the state of the art of artificial hands, discussing some of the field's most important trends and suggesting directions for future research. We review and group the most important application domains of robotic hands, extracting the set of requirements that ultimately led to the use of simplified actuation schemes and soft materials and structures—two themes that clearly emerge from our examination of developments over the past century. We provide a comprehensive analysis of novel technologies for the design of joints, transmissions, and actuators that enabled these trends. We conclude by discussing some important new perspectives generated by simpler and softer hands and their interaction with other aspects of hand design and robotics in general.

1. INTRODUCTION

Capturing the richness and complexity of the human hand has been an ambition of many fields of human knowledge, including medicine, literature, religion, philosophy, and the arts (1). Since at least the end of the sixteenth century (2), science and engineering have tried to match the sensory and motor functions of the human hand. Such wide interest comes from the important functions the hand performs, which include motor functions (grasping, holding, pushing, pulling, punching, manipulating, etc.) and sensory functions (both active and passive exploration of surface texture, moisture, and temperature, as well as feeling of vibration, pressure, force, etc.) and culminate in social functions (caressing, menacing, hand shaking, pointing, saluting, playing, and all kinds of gesturing, both voluntary and involuntary). Despite this fascination with hands, they still elude full comprehension. This is one of the reasons why artificial hands remain one of the hardest challenges in robotics (3, 4).

The design approach followed by many researchers has consisted of attempting to closely replicate the appearance and dexterity of human hands with sophisticated designs integrating many actuators and sensors; examples include the Utah/MIT Hand (5), Robonaut Hand (6), DLR (Deutsches Zentrum für Luft- und Raumfahrt) Hand II (7), Gifu Hand II (8), and Shadow Dexterous Hand (9). Although the state of the art is rich with advanced prototypes in both robotics (10–13) and prosthetics (14, 15), it can be fairly said that this approach has resulted in a limited number of real-world applications in industry robotics, service robotics, or prosthetics. To increase the relevance to such applications, several novel approaches and solutions have been proposed in recent years for the development of effective and reliable artificial hands. Indeed, while achieving perfect structural and functional anthropomorphism—i.e., resemblance to the human hand not only in appearance but also in movement and function—might be overly complex, some recent innovations in hand design aim at achieving robust, easily programmable, and economically viable robotic hands capable of performing a useful subset of the functions of human hands.

International competitions such as the first Amazon Picking Challenge (16, 17), the last DARPA Robotics Challenge (18), the 2016 Cybathlon (19), and the Robotic Grasping and Manipulation Competition (20), where most of the sophisticated grasping technologies have been challenged, showed that approaches aiming at simplified designs provide notable benefits. The winner of the first Amazon Picking Challenge was an end effector based on a suction system (16); none of the humanoid robots employed in the DARPA Robotics Challenge had a fully actuated anthropomorphic hand, and more than 15 teams (out of 25 participants) used an underactuated hand with three or four fingers; the winner of the Powered Arm Prosthesis Race at the 2016 Cybathlon used a body-powered hook (21); and an anthropomorphic but heavily underactuated hand was the winner of the Hand in Hand competition at the 2016 Robotic Grasping and Manipulation Competition (22).

The trend toward a principled simplification of hand design can be regarded as part of a larger movement. In the last few decades, many robotics research groups have focused on minimalist design approaches: While retaining many of the advantages of anthropomorphic design, a principled simplification in both design and control can sensibly reduce the system complexity in terms of number of actuators, sensors, and lines of code to program. Additionally, soft-robotics approaches have been useful, with several recent hand prototypes designed according to such principles and achieving very good results in terms of grasping versatility, robustness, and reliability—e.g., the Open Bionics Hand (23), Delft Cylinder Hand (24), Yale Multigrasp Hand (25), and RBO (Robotics and Biology Laboratory) Hand 2 (26).

This article reviews the state of the art of artificial hands over the past century, with a focus on two emerging trends: the replacement of rigid mechanical structures with soft materials and actuation, and the simplification of the hand design. To limit the scope of the survey, we

analyze these aspects while admittedly neglecting other important ones, such as kinematics and sensorization. To a first approximation, at least, these other aspects are independent from those considered here and are covered by other surveys (27, 28). The purpose of this work is to present how the minimalist design approach and soft-robotics technologies have influenced the world of hand design, particularly in their effect on the physical structure of hand joints and links, the type and control of actuators, and the distribution and coordination of movement. This analysis is supported by a comprehensive database of artificial hands covering 106 years of engineering (see **Supplemental Table 1**). The temporal layout of this database is displayed at a glance in **Figure 1**.

We start by discussing, in Section 2, the main application fields of robotic hands and their requirements. Section 3 explains the method used to analyze the state of the art of artificial hands. In Section 4, we present evidence of the two trends mentioned above, and discuss their manifestations and the correlation between technological solutions adopted in different application domains. Finally, in Section 5, we discuss the most interesting opportunities (in our opinion) and novel perspectives contributed by this design approach.

2. APPLICATIONS AND DESIGN REQUIREMENTS

Artificial hands have many potential application domains, each with different requirements. In this section, we analyze and organize the main fields of application, with the goals of (a) highlighting broad classes of application domains, which will be used for the analysis that follows in Section 3, and (b) establishing a structured vision of the design goals and required properties that these applications entail, providing information about the different technological enablers (discussed in Section 4).

2.1. Assistive Robotics

Assistive robots must be able to interact and cooperate in a safe way with the environment and humans during their activities of daily living. These robots require hands that can operate despite harsh conditions and incomplete information, and they have severe limits on encumbrance (meaning that the hands need to be small, light, and flexible). Moreover, their hands must ensure a high level of comfort, safety, and robustness. Examples of robotic hands designed or adapted to assist sick or elderly people or people with disabilities include the DLR/HIT (Harbin Institute of Technology) Hand II (103), Fluidic Hand (220), Human-Like Artificial Hand (87), and SCCA (Self-Contained Compliant Anthropomorphic) Hand (177). **Figure 2a** shows one of the most famous examples of the application of hands in this field: the DLR/HIT Hand II, used in combination with the DLR Lightweight Robot arm to assist a disabled person in a daily living task (221).


2.2. Prosthetics

Prosthetics require reduced weight and encumbrance, simple controls to accommodate the limited number of inputs available for amputees, high interaction capabilities with humans and the

Figure 1 (*Figure appears on next page*)

A time line of all the hands considered for the analysis presented in this review, covering 106 years of engineering (1912–2018, with hands up through 2010 listed in panel *a* and hands after 2010 listed in panel *b*). Image of the Utah/MIT Hand courtesy of the Computer History Museum; image of the Robonaut Hand courtesy of NASA (<https://robonaut.jsc.nasa.gov/R2>); image of the DLR Hand II adapted from Reference 218 with permission; image of the iCub Hand courtesy of the Istituto Italiano di Tecnologia; image of the prosthetic gripper courtesy of the Laboratoire de Robotique at Université Laval; image of the Yale Multigrasp Hand adapted from Reference 219 with permission; image of the SSSA-MyHand courtesy of Prensilia S.r.l. (<http://www.prensilia.com>). Abbreviation: DoF, degree of freedom.

a 1900–2009

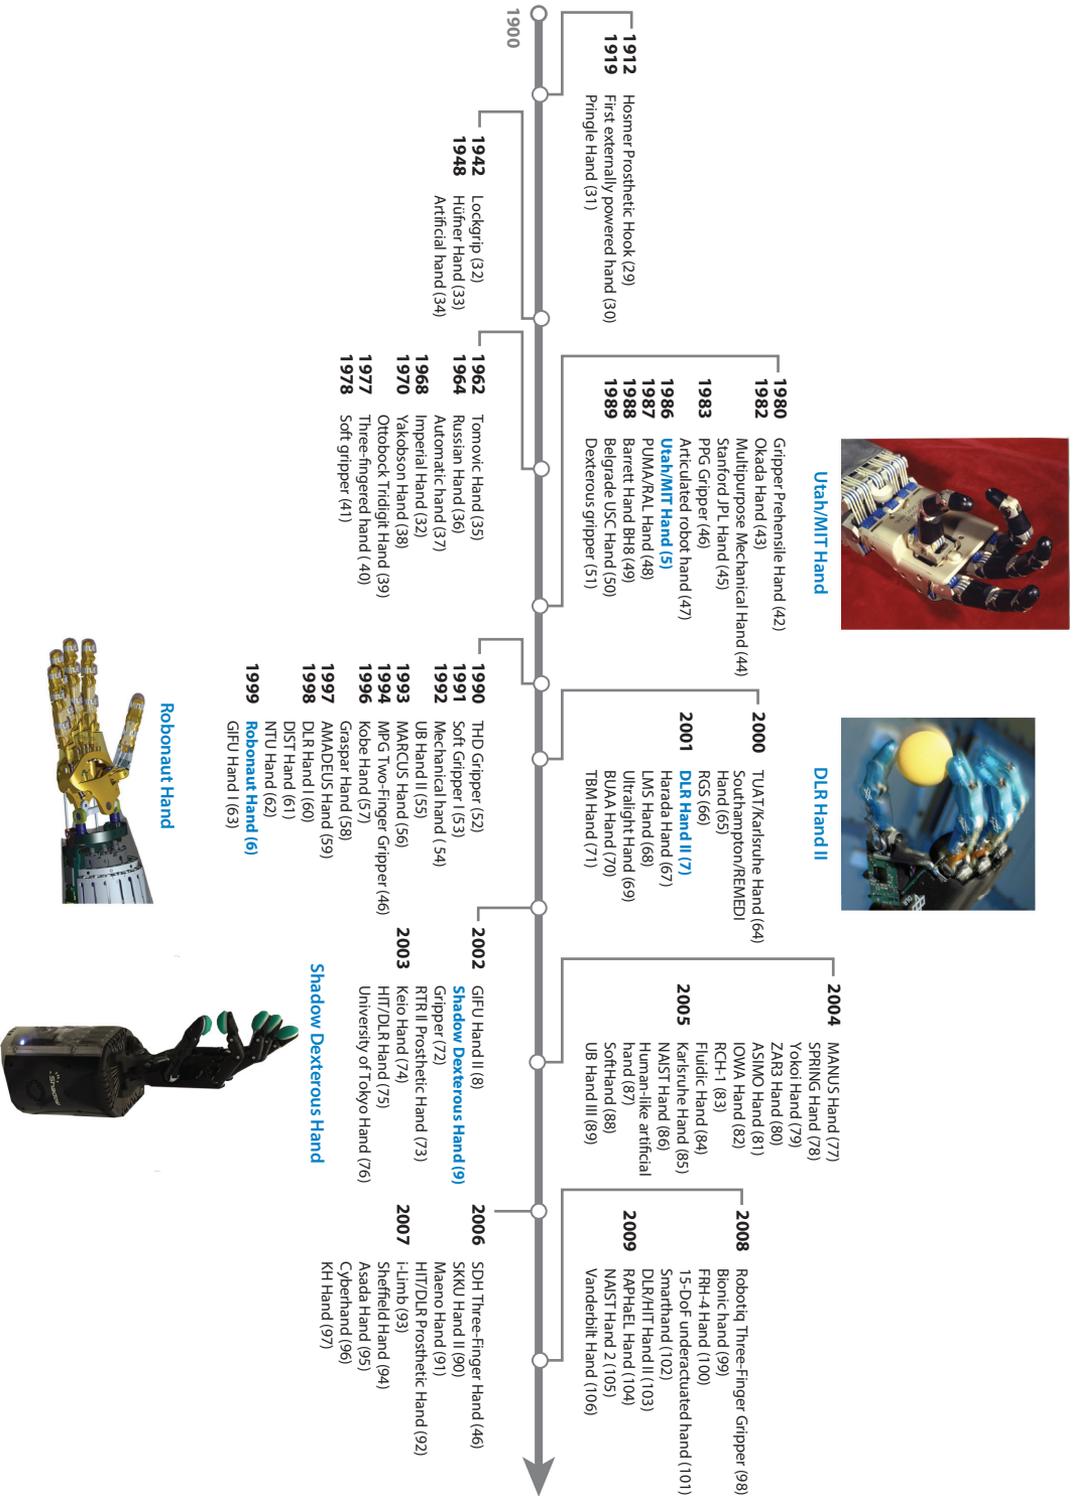

b 2010–2018



Michelangelo Hand



UNB Hand

- 2011** HRP-4C Hand (114)
Michelangelo Hand (115)
 BeBionic Hand (117)
 DexHand (118)
 Dekka Hand (119)
 DART Hand (120)
 ECF Robot Hand (121)

- 2010** Miyazaki Lab Hand (107)
 Universal Gripper (108)
 SDW Hand (109)
 Azzurra Hand (110)
ICub Hand (111)
 Awimi Hand (112)
 REEM Hand (113)



ICub Hand



i-Limb Quantum

- 2015** Open Bionics Hand (23)
i-Limb Quantum (93)
 Delt Cylinder Hand (24)
 Soft Gripper I (139)
 SoftHand 2 (140)
 Anthropomorphic hand (141)
 Valkyrie Hand (142)
 SMI Gripper (143)
 LARM Hand (144)
 Soft Hand I (145)
 Touch Hand (146)
 SR Finger (147)
 Printable robotic hand (148)
 Soft Hand II (149)
 Shear adhesion gripper (150)
 Baxter Gripper (151)



SSSA-MyHand

- 2017** Co-act gripper (46)
 Soft Gripper IV (165)
 Soft Gripper V (166)
 Underactuated hand (167)
SSSA-MyHand (168)
 Adam S Hand (169)
 JamHand (170)
 KITECH-Hand (171)
 MORAHap-2 (172)
 Soft Gripper VI (173)
 Pneumatic soft hand (174)
 PUCP Hand (175)
 Robotic Hand (176)
 SCCA Hand (177)



SoftHand Pro-H

- SIMBA Hand (178)
 Underactuated soft gripper (179)
 Soft Gripper VII (180)
 TCP Hand (181)
 GR2 (182)
 Stewart Platform–inspired hand (183)
 HERI Hand (184)
 Soft-fingered hand (185)
 Robot hand (186)
 HYDRA Hand (187)
SoftHand Pro-H (188)
 Robotic Hand II (189)
 Compliant prosthetic hand (190)
 Soft Gripper VIII (191)
 Suction pinching hand (192)
 Electrostatic gripper (193)
 Robotic Hand III (194)
 Soft Gripper IX (195)
 Robust hand (196)
 Underactuated grasper (197)
 Prosthetic hand (198)
 Soft Robotic Hand III (199)
 LPSA Hand (200)
 Taska Hand (201)
 SH Hand (202)
 OpenHand Model T24 (203)
 OpenHand Model T (203)
 OpenHand Model O (203)

- 2012** Veiver Fingers (122)
 Handroid Hand (123)
 Pisa/III SoftHand (22)
 Allegro Hand (124)
Prosthetic gripper (125)
 Sandia Hand (126)
 SCHUNK SSFH Hand (46)
 Second Hand (127)
 RBO Hand (128)
 RBO Hand (129)
 Robotiq Two-Finger Gripper (130)
 UB Hand 4 (131)
 Vincent Hand (132)
 ACT Hand (133)
 ISR-SoftHand (134)
 iHY Hand (135)
 RIC Hand (136)
 Underactuated hand (137)
 Velo Gripper (138)
 TIAGo Hand (113)

- 2016** Biomimetic hand (152)
Yale Multigrasp Hand (25)
 Alpha Hand (153)
 SoftHand-D (154)
 Model S Hand (155)
 SoftHand Pro (156)
RBO Hand 2 (26)
 Soft robotic gripper (157)
 ADA Robotic Hand (158)
 Soft prosthetic hand (159)
 Soft Robotic Hand (160)
 Bionic hand (161)
 Soft Robotic Hand II (162)
 Soft Gripper III (163)
 Fetch gripper (164)

- Yale Multigrasp Hand**



RBO Hand 2

- 2018** Gecko elastomer actuator gripper (204)
 HR-Hand (205)
 Edgy-2 (206)
 Soft Gripper X (207)
 Sensory soft hand (208)
 Pneumatic gripper (209)
 Hannes (210)
 Soft Gripper XI (211)
 Soft cable-driven gripper (212)
 Multifingered robotic hand (213)
 Underactuated hand (214)
 Carman Gripper (215)
 Soft Hand III (216)
 GraspMan Hand (217)

Prosthetic gripper



environment, and features that enable devices to operate in harsh and unstructured conditions. Hand prostheses are artificial devices designed to replace missing limbs. The state of the art includes many different solutions, such as the Ottobock Michelangelo Hand (115), the i-Limb Quantum (93), the Open Bionics Hand (23), the Yale Multigrasp Hand (25), and the SoftHand Pro (188). **Figure 2b** shows an example of a prosthetic hand: a BeBionic hand (117) used by an amputee.

2.3. Supervised Manipulation

The robotic device must be able to perform manipulation tasks while assisted remotely by a human supervisor who provides high-level decisional and planning commands. Limited perception and environmental constraints make this application challenging. Indeed, the human operator usually suggests the trajectory to be executed by the robot. Hands designed for this application have requirements in terms of robustness, efficiency, and simplicity in control. This application is typical of industrial environments. Examples of robotic hands designed or used to operate in this field are the iHY (iRobot-Harvard-Yale) Hand (135, 223) and the electrostatic gripper presented by Schaler et al. (193). **Figure 2c** shows an example: an operator using a tablet to program and supervise the action of a robotic manipulator and its end effector.

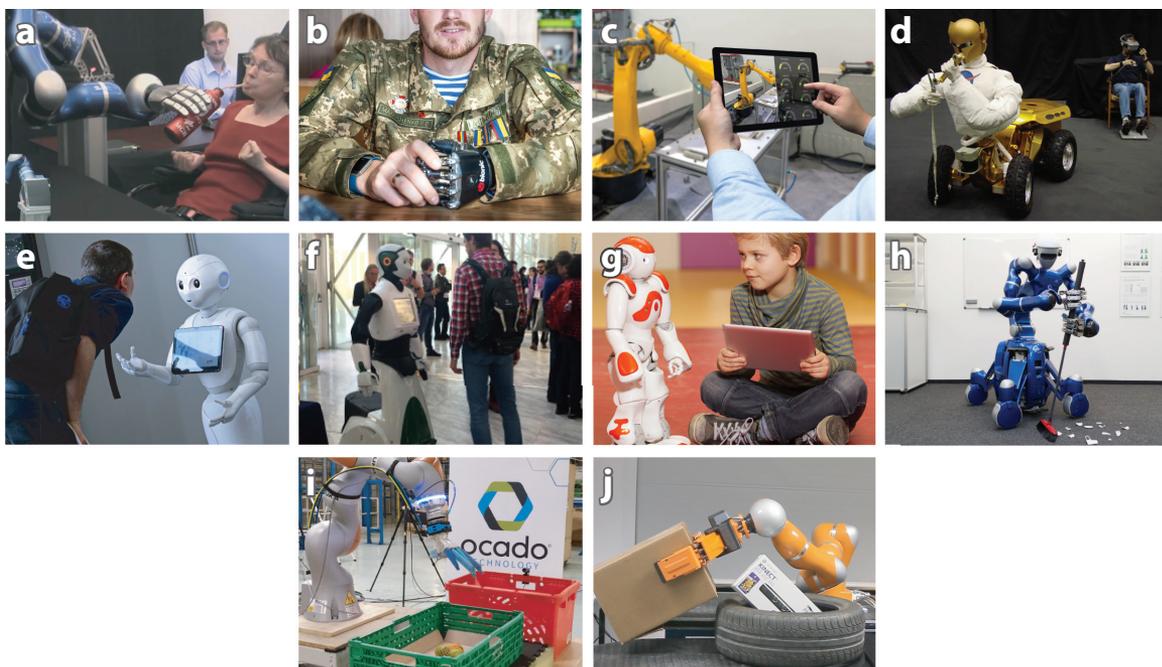


Figure 2

Examples of artificial hands employed in different application domains: (a) assistive robotics (the DLR/HIT Hand II and DLR Lightweight Robot arm assisting a disabled person in a daily living task), (b) prosthetics (the BeBionic hand used by an amputee), (c) supervised manipulation (a robotic manipulator controlled by a tablet app), (d) teleoperation (the NASA Robonaut controlled by a teleoperator; <https://robonaut.jsc.nasa.gov/R2>), (e) teleinteraction (a teleoperated robot interacting with a person), (f) social robotics (a REEM robot helping a person in a mall), (g) entertainment (a NAO robot playing with a child), (h) service robotics (the DLR Justin robot equipped with the DLR Hand II), (i) autonomous manipulation (the RBO Hand, used here to handle food), and (j) logistics (the Velvet Fingers end effector manipulating a box). Panel a adapted from Reference 221 with permission; panels b, c, e, and g adapted from Shutterstock; panel b adapted from Reference 222 with permission; panel i courtesy of OCADO Technology.

2.4. Teleoperation

Teleoperation is the direct operation of a robotic system from a remote position. The main difference between teleoperation and supervised manipulation is that the human operator commands the robot at a much lower level, often with an almost one-to-one correspondence between user actions and robot motions, with an interface that aims at transparency. One of the main uses of teleoperation is to minimize the need for humans to be physically present in dangerous situations (e.g., in irradiated environments or at sites of chemical spills) or after catastrophic events (e.g., earthquakes). Other relevant applications are related to underwater robotics (e.g., the retrieval of archaeological artifacts from the ocean) (137). These technologies must be designed to operate in unknown and sometimes harsh scenarios and guarantee a safe interaction with the environment (e.g., in order to grasp fragile or heavy objects). Such systems usually have strict requirements in terms of robustness, control simplicity, and adaptivity. Examples of robotic hands designed to operate in this field are the KH (Kinetic Humanoid) Hand (97), the RAPHaEL (Robotic Air Powered Hand with Elastic Ligaments) Hand (104), the Handroid Hand (123), and the SCHUNK S5FH Hand (224). **Figure 2d** shows an example: teleoperation of the NASA Robonaut (225) to accomplish a bimanual task.

2.5. Teleinteraction

Teleinteraction, which derives from teleoperation, aims at communication over distance using audio, video, and interaction through a robotic system. These technologies are envisioned mainly to cooperate with people, especially in daily living scenarios. Hands designed for such applications need high specifications in terms of interaction capabilities with humans and the environment, comfort, and pleasantness. The main design requirements are related to natural motion behaviors, safety, robustness, and control simplicity. Examples of robotic hands designed or used in this field of application are the mechanical hand presented by Jau (54) and the hand used by the robot ASIMO (81). **Figure 2e** shows an example: a teleoperated robot interacting with a person.

2.6. Social Robotics

Social robots are systems able to communicate with humans. This type of robot is designed to have a human-like (or human-acceptable) appearance and is usually equipped with a screen to facilitate communication and interaction. Hands designed for these robots usually need a high level of human-robot interaction capabilities and pleasantness, and they have strict requirements in terms of safety and design. Examples of robotic hands designed to operate in this field are the Alpha Hand (153) and the RBO Hand 2 (226). **Figure 2f** shows an example: the REEM humanoid robot (113) helping a person in a mall.

2.7. Entertainment

The aim of entertainment applications is to have a robot for recreation (e.g., toys), for domestic use, or for animatronics in amusement parks or museums. These robots often try to emulate a human, animal, or cartoon character, not only in their appearance but also in their behavior. Such robots usually do not need hands capable of complex interactions with people, and they work in conditions that are under supervised control. Moreover, their hands are often designed with a rigorous design formalism and are characterized by natural movements. Examples of robotic hands designed to operate in this field of application are the hand of the iCub robot (111) and the one used for the robot HRP-4C (114). **Figure 2g** shows an example: a NAO robot playing with a child.

2.8. Service Robotics

Service robots are created to assist humans in performing several kinds of tasks and are often intended to operate in a semiautonomous or fully autonomous way. They are designed to work in scenarios such as domestic environments and require high reliability and good interaction with humans and the environment. Their design requirements relate mainly to robustness, adaptivity, simplicity of control, and natural motion. Examples of robotic hands designed to operate in this field of application are the Ultralight Hand (227) and the MiyazakiLab Hand (107). **Figure 2b** shows an example: the DLR Justin robot (228), equipped with the DLR Hand II, grasping a broom and cleaning the floor.

2.9. Autonomous Manipulation

Robots designed for autonomous manipulation are usually intended to be used in structured environments, although such robots have recently been used in unstructured environments. The former approach is typical of pick-and-place industrial scenarios. Versatile but robust grippers (with two or three fingers) are usually preferred. Historically, grippers (e.g., 43, 48, 52) adopted in this context have been designed for minimum interaction with people, use in well-structured environments, and use in environments where information about the object and the status of the robot are always well known. Robustness, adaptivity, and design formalisms are among the main requirements. Some recent trends are changing this approach to autonomous manipulation, looking for new end effectors that can interact with the environment (and, to some extent, with people) to show intrinsic adaptivity, and that can deal with uncertainties due to limitations in the robot sensorization and perception. Requirements such as robustness and safety are still mandatory in this context. Examples of possible fields of use include harvesting and bin picking from boxes containing disorganized objects of different shapes. Examples of robotic hands designed to operate in this field of application were described by Brown et al. (108), Johnson et al. (229), and Borst et al. (230). **Figure 2i** shows an example: the RBO Hand, used here to perform autonomous food-handling tasks.

2.10. Logistics

Systems adopted in logistics are intended for fast and productive handling of goods in industrial chains. Two main approaches can be found in the state of the art of end effectors for logistics: the use of fixed, ad hoc end effectors, explicitly designed for a certain product and a specific supply chain, and the use of general-purpose systems, able to handle several kinds of goods and characterized by intrinsic versatility. The former approach has been characterized by a high level of reliability and an intrinsic robustness, together with the need for perfect knowledge of the environmental conditions and a rigorous design. The latter approach is looking for systems that can interact with the environment and work in unstructured conditions while still maintaining a high level of robustness and efficiency. Examples of robotic hands designed to operate in this field of application are Fetch and Freight (164) and various SCHUNK hands (46). **Figure 2j** shows an example: the Velvet Fingers end effector (122) manipulating a box.

2.11. Summary

The analysis and observations above suggest some useful considerations that can be used in the following sections. First, the different application domains can be divided into three broad categories: prosthetics and rehabilitation (assistive robotics and prosthetics), industrial (supervised manipulation, autonomous manipulation, and logistics), and human–robot interaction

(teleoperation, teleinteraction, social robotics, entertainment, and service robotics). Moreover, depending on the application domain, it is possible to isolate and highlight some design goals and, consequently, the related design requirements. The robustness and adaptivity of the end effector are among the main features required to accomplish most of the goals of the application considered. This is particularly true if we consider tasks that include robot–environment interaction or lack of environmental information. In this case, robust systems allow a margin of error, while adaptability helps to simplify the control required. Furthermore, high efficiency, combined with robustness and adaptability, can limit the encumbrance. Prosthetics and rehabilitation applications require a particular focus on the safety and naturalness of the motion of the device in order to improve human–robot interaction, comfort, and pleasantness. Finally, another important aspect is simplicity of control, which also facilitates operation in harsh conditions for applications such as teleoperation and autonomous manipulation.

Figure 3 summarizes the results of the application domain analysis, showing possible application domains, design goals that must be respected to operate in the specific field of application, and design requirements needed to realize the desired goals.

3. A 1912–2018 DATABASE OF ROBOT HANDS

Supplemental Table 1 provides a database of the main artificial hands developed from 1912 to 2018. This table, which includes 199 references (mainly from scientific articles), has been compiled

Supplemental Material >

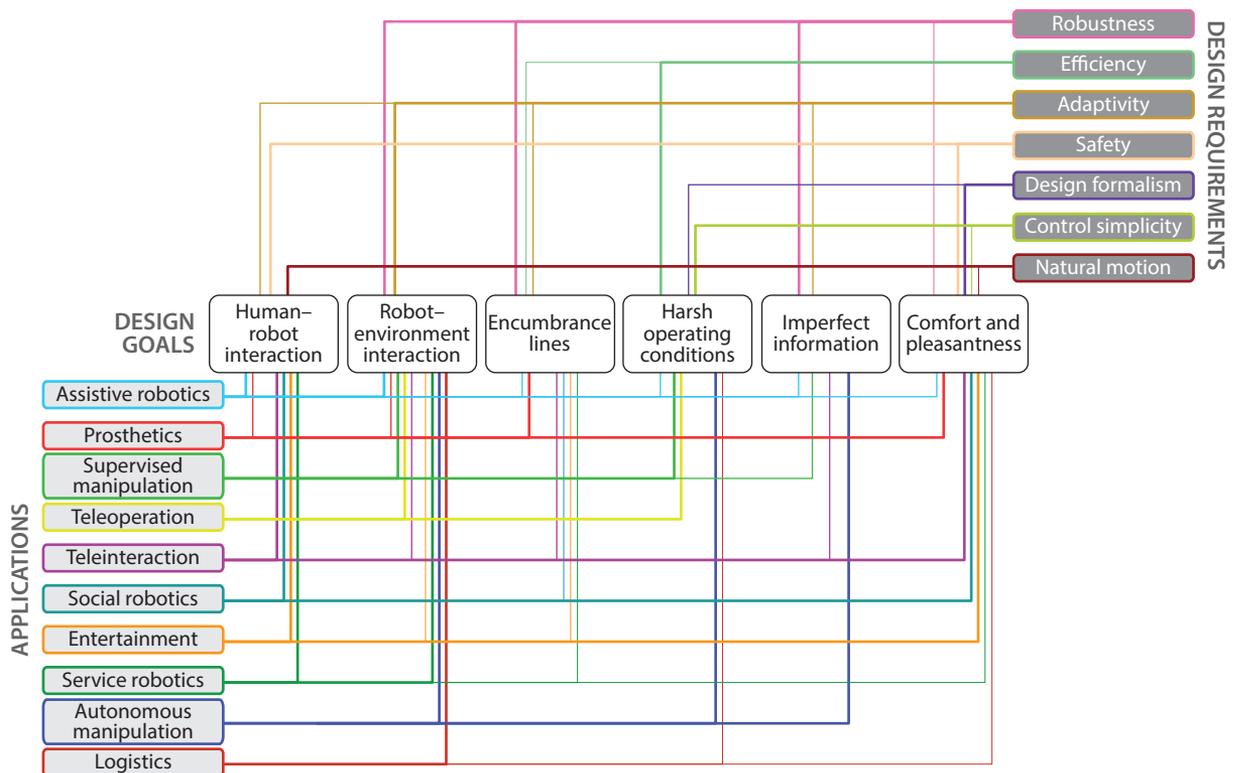


Figure 3

Map of possible correlations between applications (*bottom left*), design goals (*center*), and design requirements (*top right*). Connections are represented by colored lines; thicker lines imply stronger connections.



Figure 4

Different types of hand joints: rigid, flexible, dislocatable, and soft continuous. Images of the rigid, flexible, and soft continuous systems courtesy of DLR, the University of Bologna, and the Robotics and Biology Laboratory at Technische Universität Berlin, respectively.

based on the criteria explained below. The table reports the following information for each device: year of publication, device name, and reference; number of joints and their type; number of degrees of freedom (DoFs) and degrees of actuation (DoAs); transmission architecture; number of motors and type of actuation; and application field(s) among the three broad areas indicated in Section 2 (prosthetics and rehabilitation, industrial, and human–robot interaction).

3.1. Compilation Criteria

We used the compiled information to analyze trends and isolate the technological enablers that are driving the development of the next generation of artificial hands, with particular attention to joint design, transmission architecture, and actuation systems. To include all the different design arrangements and solutions proposed to date, we considered four types of joints: rigid, flexible, dislocatable, and soft continuous (see **Figure 4**). We also considered the most common actuation principles in the literature (**Figure 5**) and different transmission architectures (**Figure 6**).

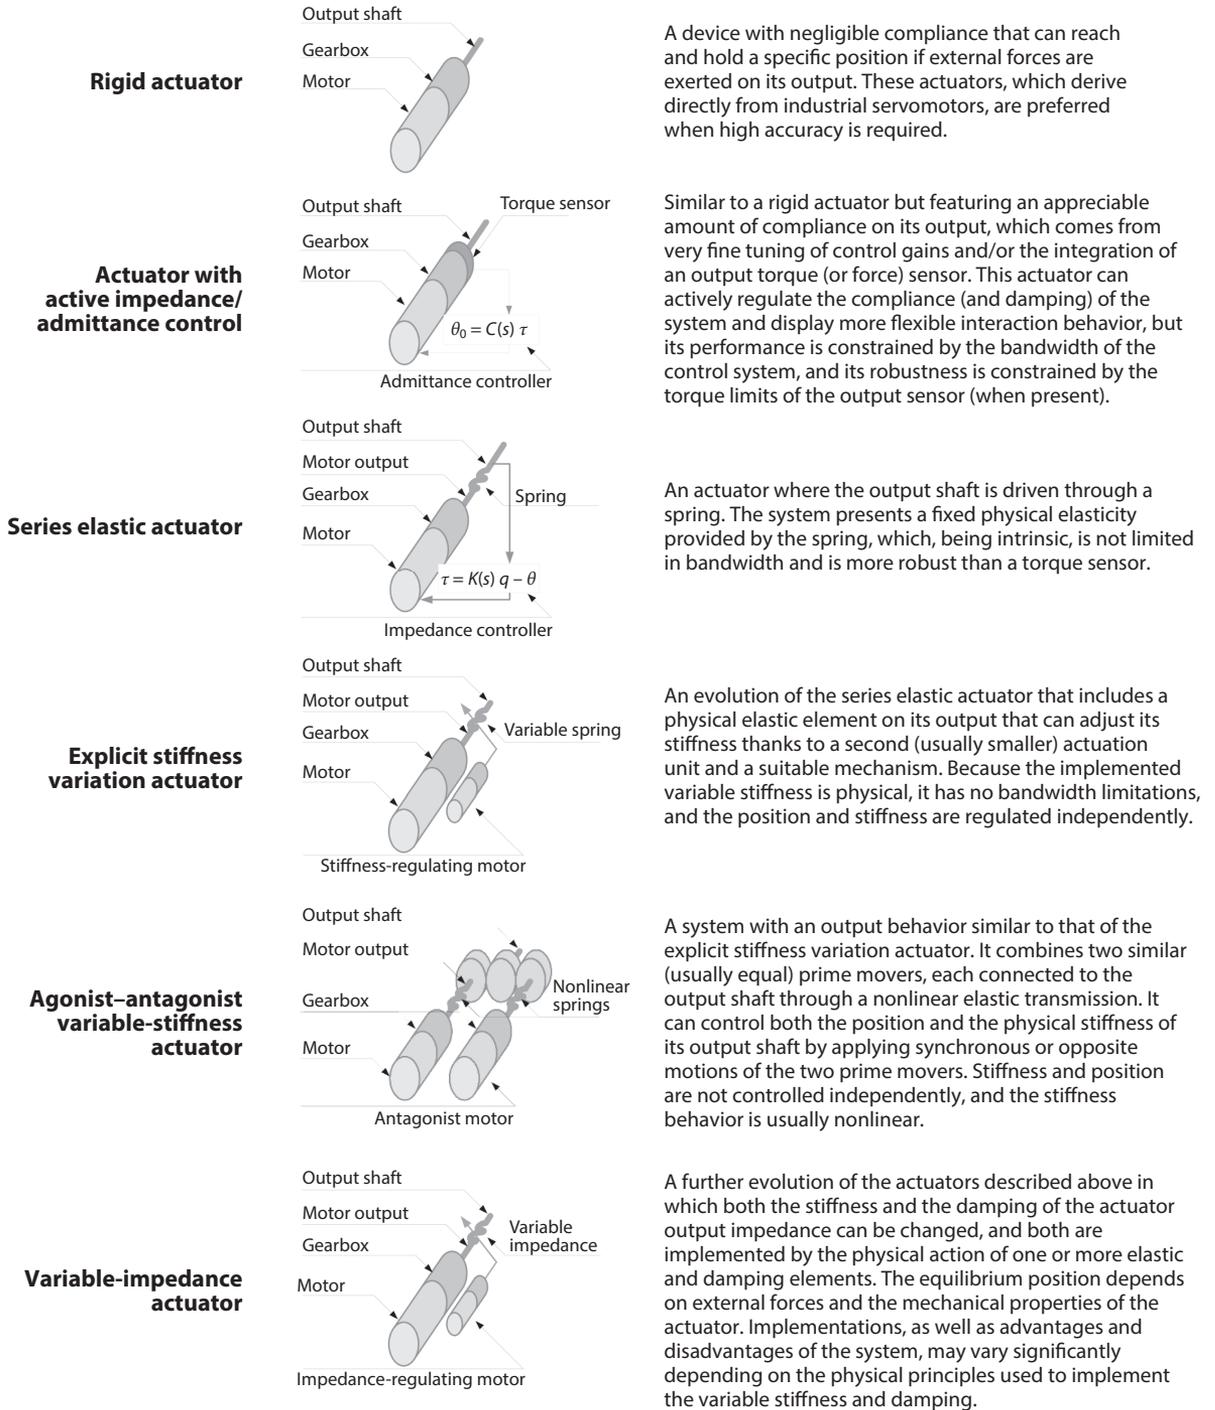


Figure 5

Different actuation principles: rigid actuator, actuator with active impedance/admittance control, series elastic actuator, explicit stiffness variation actuator, agonist–antagonist variable-stiffness actuator, and variable-impedance actuator.

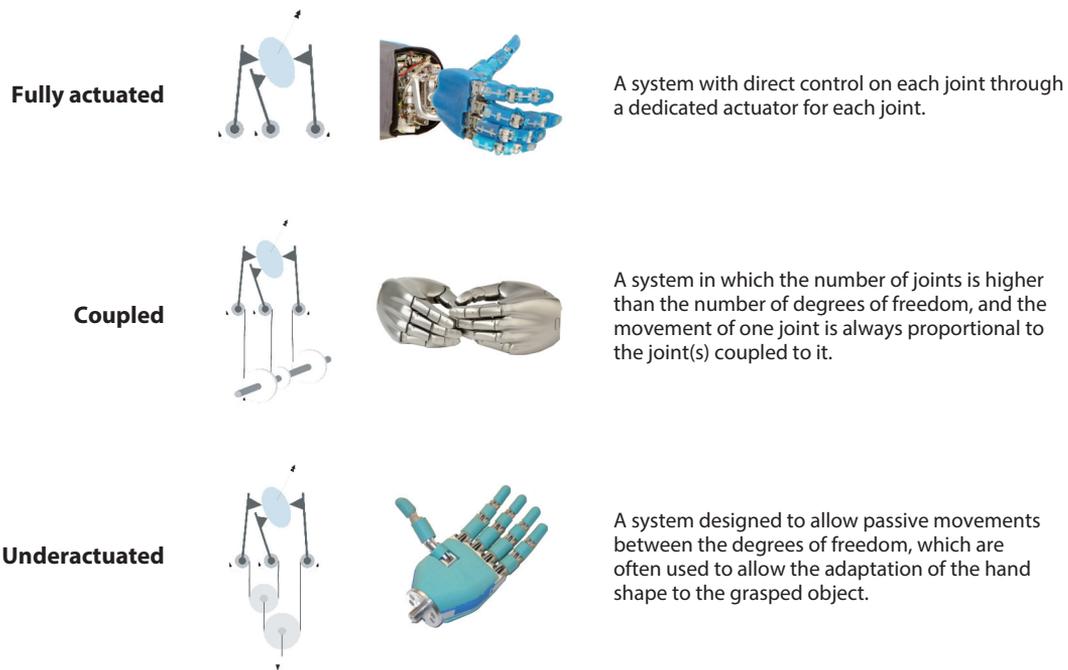


Figure 6

Different types of transmission architectures: fully actuated (e.g., 7), coupled (e.g., 103), and underactuated (e.g., 125). Images of the fully actuated and coupled systems courtesy of DLR; image of the underactuated system courtesy of the Laboratoire de Robotique at Université Laval.

4. EMERGING TRENDS

Supplemental Material >

From **Supplemental Table 1**, one can obtain the distribution over the years of hands with rigid joints versus those with soft joints, hands with rigid actuation versus those with soft actuation, and hands with independent control of fingers versus those with a different approach to the simplification of the motion architecture of fingers (for a detailed description, see Section 4.2). **Figure 7** shows this comparison in terms of the cumulative number of hands of each type, and **Figure 8** does so in terms of the percentages of each type.

As shown in **Figure 8**, there is distinct growth after the year 2000 in the use of soft actuation systems and simplified architectures (e.g., underactuated hands). Moreover, **Figures 7c** and **8c** highlight an increasing interest in the use of hands with synchronized motion principles.

Figure 9 shows the cumulative number and percentages of hands for the three classes of applications. Although prosthetics and rehabilitation is the largest application field over the entire period, there was an increased interest in the development of hands for industrial applications starting at the end of the 1970s and a growing interest in hands designed for human–robot interaction starting at the end of the 1990s. Notably, hands have been much more evenly distributed across the three domains in the past few years than they have been in the past.

The number of hands developed and published has increased considerably in the last decade, with an explosion of new prototypes in the last three years in particular. In our opinion, this interesting phenomenon stems from two main factors: an increasing interest in open-source hardware and the increasing dissemination of rapid prototyping technologies, which enables the easy and economical fabrication of mechanical components with complex geometries. The first factor is

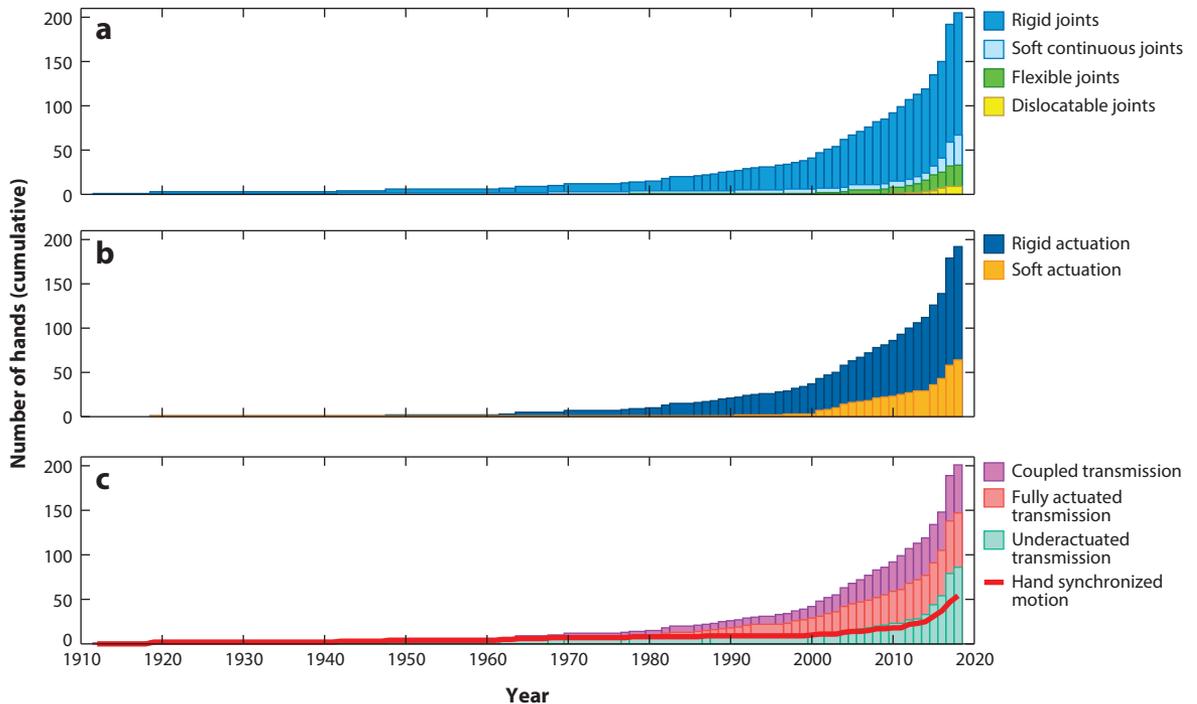


Figure 7

Cumulative distributions of hands from 1912 to 2018 based on (a) the joint type (rigid, soft continuous, flexible, or dislocatable), (b) the actuation type (rigid or soft), and (c) the transmission architecture type (coupled, fully actuated, or underactuated). In panel c, the red line shows the cumulative number of hands that embed hand synchronized motion.

supported by the growing number of open-source initiatives—such as the Open Hand Project (203), the Natural Machine Motion Initiative (231), the Soft Hands platform (232), the open-source e-NABLE community (233), and the OpenBionics Initiative (234)—that aim to foster and disseminate designs and approaches. Moreover, many of the proposed new solutions are based on open-source licenses for both software and mechanics. Examples include the standard Baxter Gripper (151), which derives from the Yale OpenHand Project’s Model T42 (203); the Hannes prosthetic hand (210); and the hand of the robot TIAGo from Pal Robotics (113), the last two of which adopt technologies from the Pisa/IIT (Istituto Italiano di Tecnologia) SoftHand (22) under the Natural Machine Motion Initiative’s OpenHardware licensing scheme. Open-source hardware and rapid prototyping are enabling researchers to easily reproduce different proposed technologies and then build new prototypes and test new ideas.

4.1. Soft-Robotics Technologies and Hands

As shown by **Figure 7**, many research groups have been investigating the development of artificial hands that take inspiration from biological structures—moving from rigid, machine-like designs to solutions where softness is embedded in the mechanics of both the articulations and the actuation systems. This section discusses these two aspects in more detail.

4.1.1. Softness in joint design. Traditionally, most hand devices have used rigid joints, but novel solutions such as flexible or soft joints are becoming increasingly popular. As described by

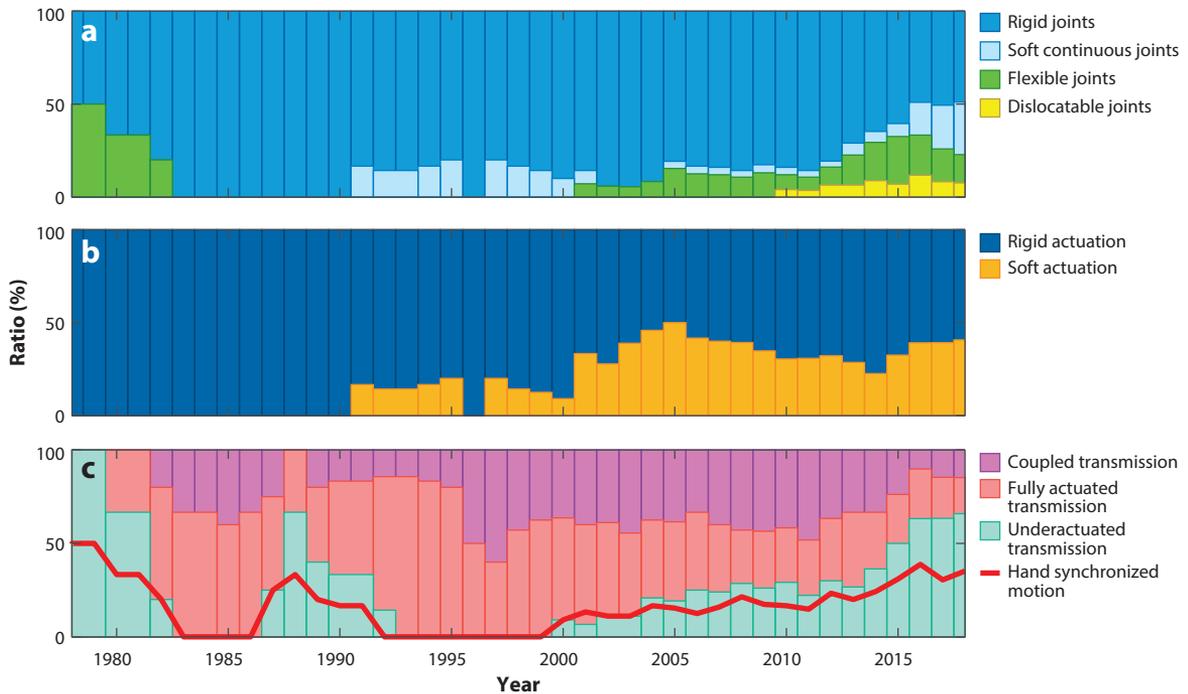


Figure 8

Relative distributions of hands from 1978 to 2018 based on (a) the joint type (rigid, soft continuous, flexible, or dislocatable), (b) the actuation type (rigid or soft), and (c) the transmission architecture type (coupled, fully actuated, or underactuated). In panel c, the red line shows the percentage of hands that embed hand synchronized motion.

Shintake et al. (235) and Hughes et al. (236), the implementations of soft joints range from articulated structures, where the flexibility results from the use of elastic elements, to fully compliant systems that are continuously deformable into myriad possible shapes. Softness is typically created by using different material fabrication techniques, from casting and molding to 3-D printing. In general, soft articulated solutions take more direct inspiration from the human musculoskeletal system and produce systems where the compliance is concentrated in the joints, as in the Model S Hand (155), Alpha Hand (153), Delft Cylinder Hand (24), Handroid Hand (123), Bionic Hand (99), FRH-4 Hand (100), Keio Hand (74), and UB (University of Bologna) Hand III (89).

Soft continuous systems—such as the RBO Hand 2 (26), ECF (Electro-Conjugate Fluid) Robot Hand (129), MiyazakiLab Hand (107), Universal Gripper (108), SDM (Shape Deposition Manufacturing) Hand (109), Karlsruhe Hand (85), and Ultralight Hand (69)—take inspiration from invertebrates, and their whole structure is built using continuously flexible materials. Successful examples like the RBO Hand 2 (26), Soft Gripper (165), Open Bionics Hand (23), Delft Cylinder Hand (24), and Yale Multigrasp Hand (25) highlight the use of soft robotic hands in a wide range of applications.

Soft robotic hands exploit the flexibility of joints to adapt the shape of the figures to the object (or environment) when grasping, substantially simplifying the control strategies (as in, e.g., 125, 135). Soft robotic hands are particularly suitable for use in unstructured environments, where conventional rigid hands require complex control algorithms just to approach an object, and for avoiding collisions with the environment (as in, e.g., 112). Interactions with objects and environmental constraints are used to functionally change the shape of the hand (as in, e.g., 22, 26, 135).

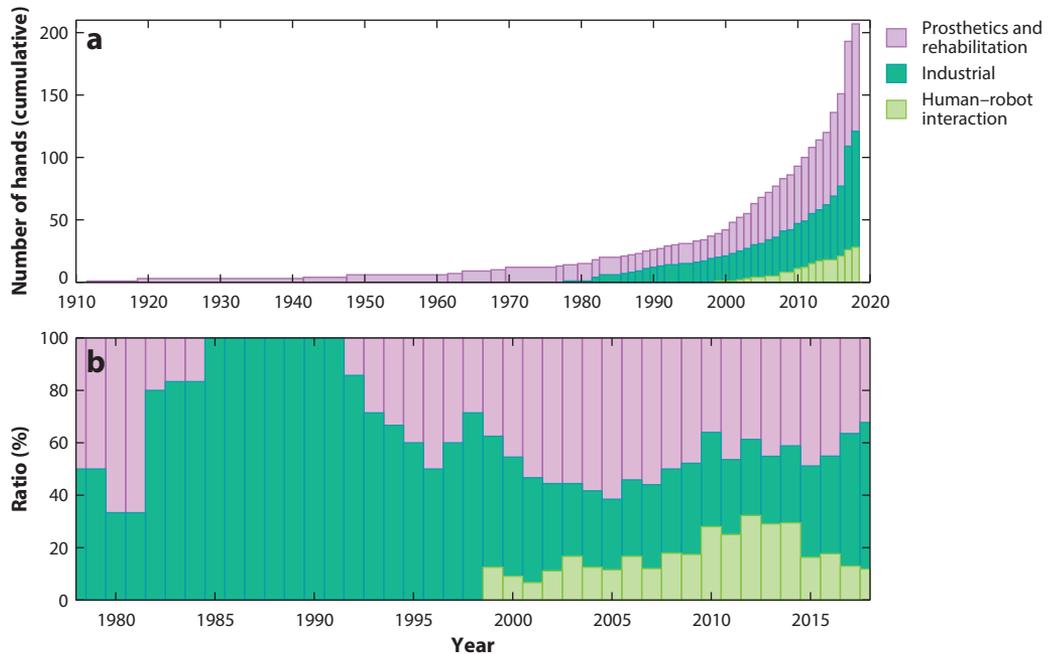


Figure 9

(a) Cumulative distributions of artificial hands from 1912 to 2018 and (b) relative distributions of artificial hands from 1978 to 2018 for the three broad application classes: prosthetics and rehabilitation, industrial, and human–robot interaction.

The compliance of the joints considerably increases the robustness of the robotic hand, which can support strong impacts with the environment or heavy disarticulation. These characteristics guarantee safe human–robot interaction, extending the use of soft robotic hands to various areas, including medical applications.

The growing research interest and technological advancement in soft robotics will lead to a significant increase in the use of soft robots in service robotics, industrial settings, and health care in the next few years. Such a trend is already evident in **Figure 10**, which shows correlations among the three application domains and the different types of joints.

Human–robot interaction applications, for example, tend to avoid using rigid joints, probably because of the unnatural and unsafe behavior of rigid joint technologies. Designs for human–robot interaction applications tend to prefer dislocatable joints, designs for industrial applications tend to prefer flexible and soft continuous joints, and designs for prosthetics and rehabilitation applications tend to prefer flexible and dislocatable joints.

4.1.2. Softness in actuation principles. Rigid actuation has been the most used approach for finger movement for many years, but as shown in **Figures 7 and 8**, alternative compliant solutions are becoming increasingly popular. Indeed, recent applications, such as human–robot interaction, have introduced novel and challenging design goals where the use of compliant actuators can provide significant advantages over traditional actuation.

As presented in **Figure 5**, the compliance in the actuation mechanisms can be introduced through stiffness or impedance modulation or by using soft and flexible materials. The latter are particularly suitable for soft continuous robotic hands, such as shape-memory alloy actuators and pneumatic actuators, which modulate stiffness by controlling the pressure of compressed air.

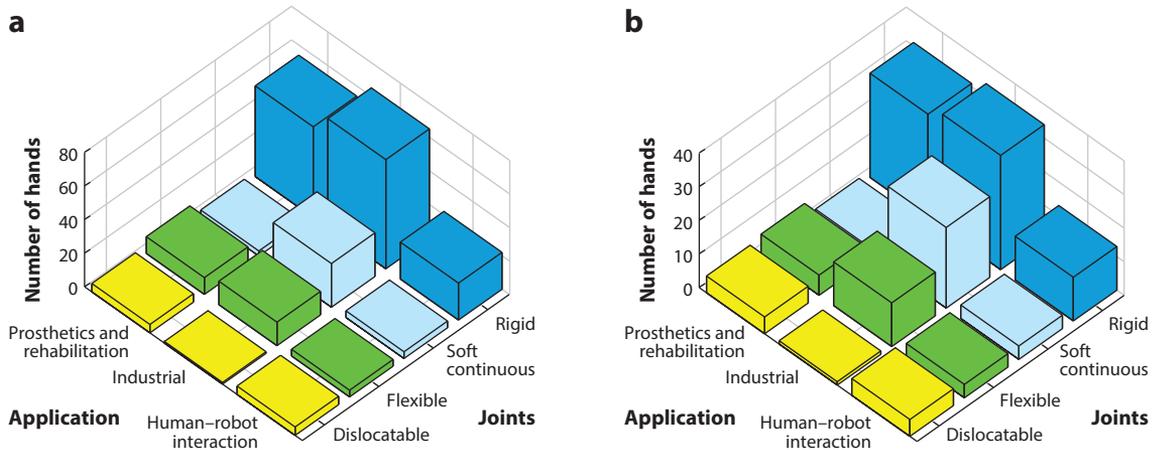


Figure 10

Correlations among the three broad classes of application (prosthetics and rehabilitation, industrial, and human–robot interaction) and the four types of soft joints (rigid, soft continuous, flexible, and dislocatable) for (a) 1912–2018 and (b) 2009–2018.

Figure 11 shows the correlations among the three application domains and the two types of actuation. Especially in the last decade, the number of soft actuators employed in the design of artificial hands has noticeably increased, with the highest rate of use in industrial and human–robot interaction applications.

4.2. Architecture Simplification

Figure 7 highlights the ongoing interest of the research community in solutions that simplify the motion architecture of artificial hands. Several approaches have been adopted, the most relevant of which (fully actuated, coupled, and underactuated) were described in **Figure 6**. Note that the

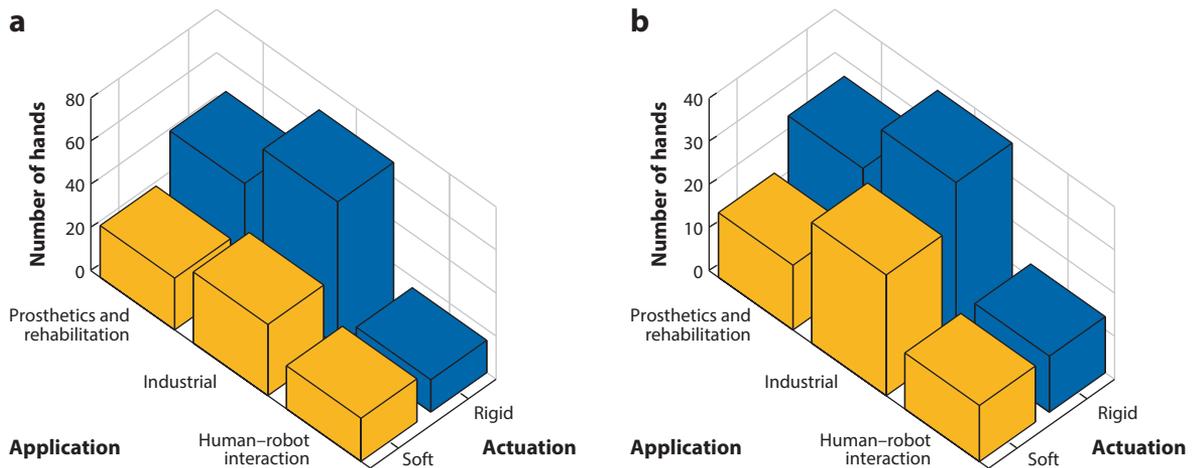


Figure 11

Correlations among the three broad classes of application (prosthetics and rehabilitation, industrial, and human–robot interaction) and the two types of actuation (rigid and soft) for (a) 1912–2018 and (b) 2009–2018.

adoption of one of these motion architectures is not directly related to the adoption of a specific kind of joint (rigid or soft) or actuation principle (rigid or soft). Some prototypes have also combined all three transmission architectures in a single device.

The first and, for many years, most common approach to hand motion was full actuation, where the number of DoFs is equal to the number of joints; the DLR Hand II is a significant example of this architecture. A different approach to simplification is the coupled architecture. These hands use one actuator to control each DoF, and if one of the joints reaches a contact, all the joints coupled to it will stop. Fully actuated and coupled architectures have been predominant in the last decade, but underactuation has now emerged as a novel way to simplify designs. Underactuated systems allow passive movements between DoFs, which are determined by the equilibrium of the contact forces with passive elements such as springs or, less often, clutches or brakes (see 237, 238). Because they use fewer motors, they save space, weight, and cost, which has led to the development of a large number of underactuated hands and adaptive grippers (for a complete review, see 239).

One particularly investigated aspect of robotic and prosthetic underactuated hands is adaptivity. Hands and grippers [such as those proposed by Laliberté et al. (72) and Dollar & Howe (109), respectively] are characterized by many DoFs but just one DoA. The use of a coupled or underactuated motion architecture can be related to some of the DoFs of the hand, e.g., fingers or pairs of fingers. Some special approaches in the design of the motion architecture extend the idea behind coupled and underactuated actuation to all of a hand's joints. This approach is trivial in hands with a reduced number of DoFs and DoAs (e.g., prosthetic grippers) but nontrivial in anthropomorphic hands with many DoFs. Only in the last two decades has a novel approach to the simplification and coordination of finger movements emerged. This approach, which we refer to as hand synchronized motion (as opposed to synchronized motion only within each finger), takes inspiration from biology and neuroscience and proposes a systematic method for designing artificial hands with a simplified architecture. Neuroscience studies suggest that the brain uses the hand as an organized and ordered ensemble. Particular patterns of muscular activities can form a so-called base set, analogous to the concept of basis in the theory of vector spaces (240): a minimal number of linearly independent elements that, under specific operations, generate all members of a given set, in this case, the set of all movements. Such a base set is referred to as the space of postural synergies or the eigengrasp space (241, 242). Different approaches in robotics have recently tried to take advantage of the idea of synergies, aiming to reproduce the same coordinated and ordered ensemble of human hand motion (95, 141). The word synergies is strictly related to the neuroscientific context and can generate confusion if used improperly in an engineering context. For that reason, we prefer the term hand synchronized motion, which is purely descriptive and does not necessarily imply a connection with any neuroscientific context.

The results shown in **Figure 12** highlight how, in the last decade, hands with underactuated transmissions dominate in all applications, even if there are still a good number of solutions with coupled transmission in prosthetics and rehabilitation and with independent transmission in industrial applications. Almost all solutions that implement hand synchronized motion rely on underactuated transmissions.

5. FURTHER PERSPECTIVES

The previous sections have highlighted some new trends and technological solutions in artificial hands. The primary aim of this review was to analyze these trends and highlight the main methods and approaches proposed over the years, and a complete analysis of the consequences that such new designs can have in the use, planning, and control of novel and future hands is beyond the

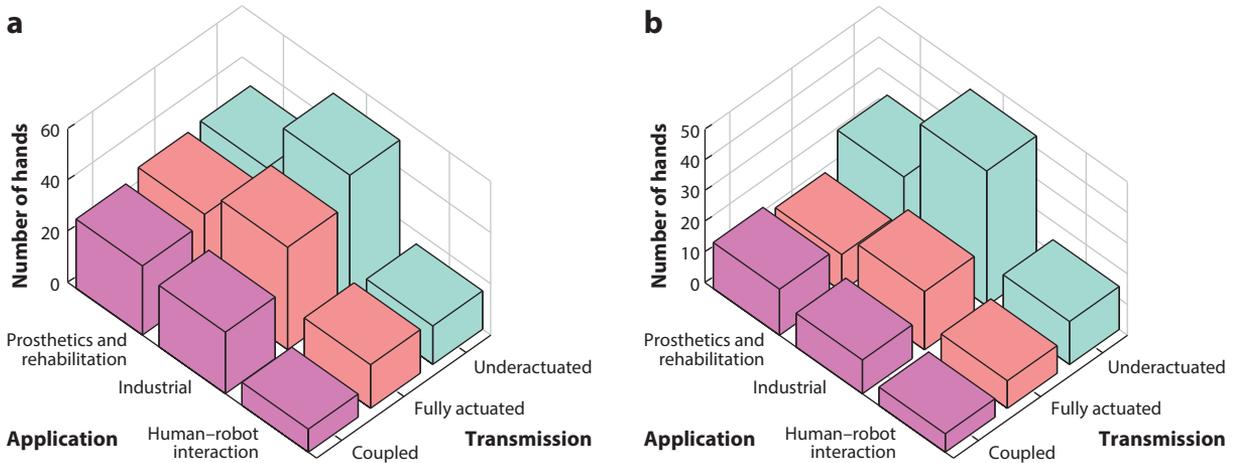


Figure 12

Correlations among the three broad classes of application (prosthetics and rehabilitation, industrial, and human–robot interaction) and the three types of transmission architectures (coupled, fully actuated, or underactuated) for (a) 1912–2018 and (b) 2009–2018.


scope of the article. However, we would like to discuss a few important consequences that these emerging trends are having, or could have, in the field of artificial hands.

5.1. Planning

In our opinion, softness and adaptivity enable artificial hands to carry out real interactions with objects, the environment, and people. As discussed by Bonilla et al. (243), such new capabilities shift the conventional paradigm of grasp planning, moving it away from a timid approach, in which the fingers must interact only with the object when performing a grasp, without perturbing the equilibrium of the object, the environment, or the hand itself. This approach to manipulation, which is a consequence of the rigidity of the contacts and the fragility of the hand, has been recently challenged by the introduction of adaptable, underactuated, and/or soft hands. Devices such as the underactuated Robotiq Three-Finger Gripper (98), RBO Hand and RBO Hand 2 (26, 128), iHY Hand (135), and Pisa/IIT SoftHand (22) are designed to be much simpler and much more robust with respect to the entire interaction process. This approach allows these hands to be used in more daring interactions with the objects in an environment—using their full surface for enveloping grasps and exploiting objects and environmental constraints to functionally shape the hand, going beyond its nominal kinematic limits by exploiting structural softness (as discussed in, e.g., 244).

Figure 13 illustrates the differences between the rigid and soft approaches to manipulation. In the classical paradigm (Figure 13a), the planner searches for suitable points on the object that generate a nominal grasp of good quality and for trajectories that can bring the fingertips there while avoiding contact with the environment. In the corresponding example shown in Figure 13b, in order to grasp the cup while avoiding the wall on the left, the planner must find a path in a narrow passage. Soft manipulation (Figure 13c) subverts this scheme. In the example shown in Figure 13d, hand–object, object–environment, and hand–environment contacts are not avoided; rather, they are sought after and exploited to shape the hand itself around the object. The set of all possible physical interactions among the hand, the object, and the environment, which define the hand–object functional interaction, is sometimes referred to as the set of enabling constraints.


a Rigid manipulation paradigm

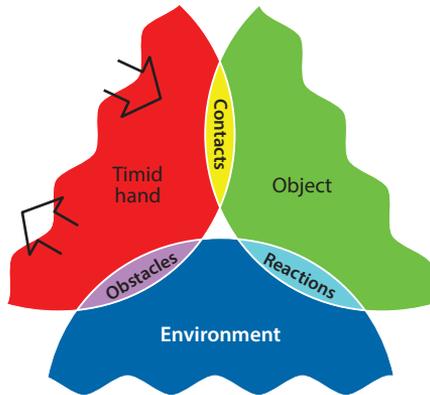

b Rigid manipulation example



c Soft manipulation paradigm

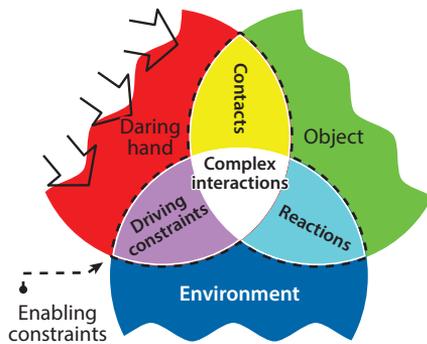

d Soft manipulation example



Figure 13

Paradigm shift in manipulation, from (a,b) rigid manipulation to (c,d) soft manipulation. Primary colors identify the scenario's main actors: red for the robotic hand, blue for the environment, and green for the target object. Secondary colors codify simple interactions between the actors: yellow for hand–object, cyan for object–environment, and purple for environment–hand. Complex interactions that involve all three actors simultaneously are shown in white. Figure adapted from Reference 243 with permission.

The analysis of such possibilities constitutes a new challenge for existing grasping algorithms. Adaptation to entirely or partially unknown scenes remains difficult, and only a few approaches have been investigated so far.

5.2. Sensorization

For many years, one of the main challenges in the development of artificial hands related to adding different kinds of sensors, such as joint torque measurement and finger posture reconstruction. The novel approaches proposed in the last three decades require fewer sensors and, at least in some fields, reduce the need for precision and accuracy in the sensorization. A new set of minimalist sensor systems (as in 245–247) can minimize the amount of sensorization and help to further simplify hand designs.

5.3. Robustness

One of the most evident benefits of the new design trends toward simplified soft hands is the unprecedented level of robustness. Such robustness will bring new attention to some aspects that will require consideration: the need for a new set of benchmarks and evaluation criteria that can guide the development of new hands and the need to maintain focus on systems that can benefit from this new capability. For instance, because artificial hands can now be used in the real world, the designs must be reliable and effective, and parameters like material life and fatigue need to be assessed quantitatively. A set of physical tests was presented by Falco et al. (248), and examples of proposed solutions or achievement were described by Grebenstein et al. (249) for the DLR Hand and by Zisimatos et al. (250) for the Open Bionics Hand.

5.4. Tactile Exploration

Besides vision-based methods, hand compliance offers the real possibility of using tactile exploration for 3-D reconstruction of unknown environments and objects. Tactile sensing can solve some severe limitations of computer vision, such as sensitivity to illumination and limited perspective. As an example, a combined procedure based on dynamic potential fields that aims to reconstruct 3-D object models, which are then used for grasp planning and execution, was presented by Bierbaum et al. (251) and subsequently extended by Herzog et al. (252).

5.5. Costs

Reduced complexity and the possibility of using new fabrication technologies are opening the way to reduced costs for the production of artificial hands. Moreover, the design of robust and compliant joints comes with an interesting side effect: the possibility of using materials with lower mechanical strength and precision. The softness of the joints and actuation enables the use of rubber and plastic materials, allowing for fabrication processes that can reduce costs for commercial devices (e.g., by using injection molding) and for advancement in research (e.g., by using rapid prototyping techniques).

6. CONCLUSION

The main objective of this article was to analyze the state of the art of artificial hands as well as new trends that are emerging in the field. We reviewed and grouped the most important application domains of robotic hands, extracting the set of requirements that ultimately led to the development of soft-robotics solutions and the simplification of actuation arrangements. We also provided a comprehensive analysis of the novel enabling technologies for the design of joints, transmissions, and actuators that enabled these two novel trends. We limited our discussion to these aspects while neglecting others (such as finger kinematics and sensors), aiming to emphasize the effect of these two new approaches over other design parameters that, at least in our opinion, have had a minor impact. We concluded with an in-depth discussion of the advantages of soft and simple hand designs and by reporting the most important new perspectives generated by those designs and their interaction with other aspects of hand design and robotics in general.

DISCLOSURE STATEMENT

Some of the research described in this article has received funding from the European Union's Horizon 2020 Research and Innovation Programme under grant agreements 688857 (SoftPro) and 645599 (SOMA). The content of this publication is the sole responsibility of the authors. The

European Commission or its services cannot be held responsible for any use that may be made of the information it contains.

LITERATURE CITED

1. Alpenfels EJ. 1955. The anthropology and social significance of the human hand. *Artif. Limbs* 2:4–21
2. Zuo KJ, Olson JL. 2014. The evolution of functional hand replacement: from iron prostheses to hand transplantation. *Plast. Surg.* 22:44–51
3. Bicchi A. 2000. Hands for dexterous manipulation and robust grasping: a difficult road toward simplicity. *IEEE Trans. Robot. Autom.* 16:652–62
4. Biagiotti L, Lotti F, Melchiorri C, Vassura G. 2004. *How far is the human hand? A review on anthropomorphic robotic end-effectors*. Rev. Pap., Univ. Bologna, Bologna, Italy. <http://www-lar.deis.unibo.it/woda/data/deis-lar-publications/3cbd.Document.pdf>
5. Jacobsen S, Iversen E, Knutti D, Johnson R, Biggers K. 1986. Design of the Utah/M.I.T. dextrous hand. In *1986 IEEE International Conference on Robotics and Automation*, Vol. 3, pp. 1520–32. New York: IEEE
6. Lovchik C, Diftler MA. 1999. The Robonaut hand: a dexterous robot hand for space. In *1999 IEEE International Conference on Robotics and Automation*, Vol. 2, pp. 907–12. New York: IEEE
7. Butterfaß J, Grebenstein M, Liu H, Hirzinger G. 2001. DLR-Hand II: next generation of a dextrous robot hand. In *2001 ICRA: IEEE International Conference on Robotics and Automation*, Vol. 1, pp. 109–14. New York: IEEE
8. Kawasaki H, Komatsu T, Uchiyama K. 2002. Dexterous anthropomorphic robot hand with distributed tactile sensor: Gifu Hand II. *IEEE/ASME Trans. Mechatron.* 7:296–303
9. Shadow Robot Co. 2018. Shadow Dexterous Hand. *Shadow Robot Company*. <https://www.shadowrobot.com/products/dexterous-hand>
10. Gama Melo EN, Aviles Sanchez OF, Amaya Hurtado D. 2014. Anthropomorphic robotic hands: a review. *Ing. Desarro.* 32:279–313
11. Tai K, El-Sayed AR, Shahriari M, Biglarbegian M, Mahmud S. 2016. State of the art robotic grippers and applications. *Robotics* 5:11
12. Mattar E. 2013. A survey of bio-inspired robotics hands implementation: new directions in dexterous manipulation. *Robot. Auton. Syst.* 61:517–44
13. Kirori AK, Dua RL. 2012. Review of control mechanism of multi-fingered robotic arm and proposal of new design. *IOSR J. Eng.* 2:1251–54
14. Belter JT, Segil JL, SM B. 2013. Mechanical design and performance specifications of anthropomorphic prosthetic hands: a review. *J. Rehabil. Res. Dev.* 50:599–618
15. Vujaklija I, Farina D, Aszmann O. 2016. New developments in prosthetic arm systems. *Orthop. Res. Rev.* 8:31–39
16. Correll N, Bekris KE, Berenson D, Brock O, Causo A, et al. 2018. Analysis and observations from the first Amazon Picking Challenge. *IEEE Trans. Autom. Sci. Eng.* 15:172–88
17. Eppner C, Höfer S, Jonschkowski R, Martín-Martín R, Sieverling A, et al. 2016. Lessons from the Amazon Picking Challenge: four aspects of building robotic systems. In *Robotics: Science and Systems XII*, ed. D Hsu, N Amato, S Berman, S Jacobs, chap. 36. N.p.: Robot. Sci. Syst. Found.
18. Pratt G, Manzo J. 2013. The DARPA Robotics Challenge. *IEEE Robot. Autom. Mag.* 20:10–12
19. Riener R. 2016. The Cybathlon promotes the development of assistive technology for people with physical disabilities. *J. Neuroeng. Rehabil.* 13:49
20. IEEE Tech. Comm. Robot. Hand Grasping Manip. 2016. Robotic Grasping and Manipulation Competition. *IEEE Technical Committee on Robotic Hand Grasping and Manipulation*. http://www.rhgm.org/activities/competition_iros2016
21. Dipo Power. 2018. Dipo Power website. <http://dipo-power.com>
22. Catalano MG, Grioli G, Farnioli E, Serio A, Piazza C, Bicchi A. 2014. Adaptive synergies for the design and control of the Pisa/IIT SoftHand. *Int. J. Robot. Res.* 33:768–82
23. Kontoudis GP, Liarokapis MV, Zisimatos AG, Mavrogiannis CI, Kyriakopoulos KJ. 2015. Open-source, anthropomorphic, underactuated robot hands with a selectively lockable differential mechanism:

- towards affordable prostheses. In *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 5857–62. New York: IEEE
24. Smit G, Plettenburg DH, van der Helm FC. 2015. The lightweight Delft Cylinder Hand: first multi-articulating hand that meets the basic user requirements. *IEEE Trans. Neural Syst. Rehabil. Eng.* 23:431–40
 25. Belter JT, Dollar AM, Leddy M. 2016. *Multi-grasp prosthetic hand*. US Patent Appl. 15/240819
 26. Deimel R, Brock O. 2016. A novel type of compliant and underactuated robotic hand for dexterous grasping. *Int. J. Robot. Res.* 35:161–85
 27. Pons J, Ceres R, Pfeiffer F. 1999. Multifingered dextrous robotics hand design and control: a review. *Robotica* 17:661–74
 28. Saudabayev A, Varol HA. 2015. Sensors for robotic hands: a survey of state of the art. *IEEE Access* 3:1765–82
 29. Dorrance DW. 1912. *Artificial hand*. US Patent 1,042,413
 30. Schlesinger G. 1919. Der mechanische Aufbau der künstlichen Glieder. In *Ersatzglieder und Arbeitshilfen für Kriegsbeschädigte und Unfallverletzte*, ed. M Borchardt, K Hartmann, H Leymann, R Radike, G Schlesinger, H Schwiening, pp. 321–661. Berlin: Springer
 31. Pringle A. 1919. *Artificial hand*. US Patent 1,324,564
 32. Becker Mech. Hand Co. 2018. Products. *Becker Mechanical Hand Company*. <http://www.beckermechanicalhand.com/products>
 33. Reiter R. 1948. Eine neue Elektrokunsthands. *Grenzgebiete Med.* 4:133–35
 34. Dale FL. 1948. *Artificial hand*. US Patent 2,457,305
 35. Tomovic R, Boni G. 1962. An adaptive artificial hand. *IRE Trans. Autom. Control* 7:3–10
 36. Sherman ED. 1964. A Russian bioelectric-controlled prosthesis: report of a research team from the Rehabilitation Institute of Montreal. *Can. Med. Assoc. J.* 91:1268–70
 37. Rakić M. 1964. An automatic hand prosthesis. *Med. Electron. Biol. Eng.* 2:47–55
 38. Moiseevich B, Pinkhasovich P, Savelievich Y. 1970. *Artificial hand for prostheses with bioelectrical control*. US Patent 3,521,303
 39. Ottobock. 2018. Solution overview: upper limb prosthetics. *Ottobock*. <http://www.ottobock.com/prosthetics/upper-limb-prosthetics/solution-overview/>
 40. Crossley FE, Umholtz F. 1977. Design for a three-fingered hand. *Mech. Mach. Theory* 12:85–93
 41. Hirose S, Umetani Y. 1978. The development of soft gripper for the versatile robot hand. *Mech. Mach. Theory* 13:351–59
 42. TRS. 2018. About TRS. *TRS*. <http://www.trsprosthetics.com/about-trs>
 43. Okada T. 1982. Computer control of multijointed finger system for precise object-handling. *IEEE Trans. Syst. Man Cybernet.* 12:289–99
 44. Rovetta A, Franchetti I, Vicentini P. 1982. *Multi-purpose mechanical hand*. US Patent 4,351,553
 45. Salisbury JK, Craig JJ. 1982. Articulated hands: force control and kinematic issues. *Int. J. Robot. Res.* 1:4–17
 46. SCHUNK. 1983. Milestones of innovation. *SCHUNK*. https://schunk.com/fi_en/company/about-schunk/innovation-milestones
 47. Hanafusa H, Kobayashi H, Terasaki N. 1983. Fine control of the object with articulated multi-finger robot hands. In *1983 International Conference on Advanced Robotics*, pp. 245–52. Tokyo: Jpn. Ind. Robot Assoc.
 48. Kim J, Blythe D, Penny D, Goldenberg A. 1987. Computer architecture and low level control of the PUMA/RAL hand system: work in progress. In *1987 IEEE International Conference on Robotics and Automation*, Vol. 4, pp. 1590–94. New York: IEEE
 49. Ulrich N, Paul R, Bajcsy R. 1988. A medium-complexity compliant end effector. In *1988 IEEE International Conference on Robotics and Automation*, pp. 434–36. New York: IEEE
 50. Rakić M. 1989. Multifingered robot hand with selfadaptability. *Robot. Comput.-Integr. Manuf.* 5:269–76
 51. Vanbrussel H, Santoso B, Reynaerts D. 1989. Design and control of a multi-fingered robot hand provided with tactile feedback. In *Proceedings of the NASA Conference on Space Telerobotics*, Vol. 3, pp. 89–101. Washington, DC: NASA

52. Paetsch W, Kaneko M. 1990. A three fingered, multijointed gripper for experimental use. In *IEEE International Workshop on Intelligent Robots and Systems: Towards a New Frontier of Applications*, Vol. 2, pp. 853–58. New York: IEEE
53. Suzumori K, Iikura S, Tanaka H. 1991. Development of flexible microactuator and its applications to robotic mechanisms. In *1991 IEEE International Conference on Robotics and Automation*, pp. 1622–27. New York: IEEE
54. Jau BM. 1992. Man-equivalent telepresence through four fingered human-like hand system. In *1992 IEEE International Conference on Robotics and Automation*, pp. 843–48. New York: IEEE
55. Melchiorri C, Vassura G. 1992. Mechanical and control features of the University of Bologna hand version 2. In *Proceedings of the 1992 IEEE/RSJ International Conference on Intelligent Robots and Systems*, Vol. 1, pp. 187–93. New York: IEEE
56. Kyberd P, Tregidgo R, Sachetti R, Schmidl H, Snaith M, et al. 1993. The Marcus intelligent hand prosthesis. In *Rehabilitation Technology: Strategies for the European Union*, ed. E Ballabio, I Palencia-Porrero, R Puig de la Bellacasa, pp. 98–102. Amsterdam: IOS
57. Okuno R, Yoshida M, Akazawa K. 1996. Development of biomimetic prosthetic hand controlled by electromyogram. In *1996 4th International Workshop on Advanced Motion Control*, Vol. 1, pp. 103–8. New York: IEEE
58. Crisman JD, Kanojia C, Zeid I. 1996. Graspar: a flexible, easily controllable robotic hand. *IEEE Robot. Autom. Mag.* 3:32–38
59. Lane DM, Davies JBC, Casalino G, Bartolini G, Cannata G, et al. 1997. AMADEUS: advanced manipulation for deep underwater sampling. *IEEE Robot. Autom. Mag.* 4:34–45
60. Butterfass J, Hirzinger G, Knoch S, Liu H. 1998. DLR's multisensory articulated hand. I. Hard- and software architecture. In *1998 IEEE International Conference on Robotics and Automation*, Vol. 3, pp. 2081–86. New York: IEEE
61. Caffaz A, Cannata G. 1998. The design and development of the DIST-hand dextrous gripper. In *1998 IEEE International Conference on Robotics and Automation*, Vol. 3, pp. 2075–80. New York: IEEE
62. Lin LR, Huang HP. 1998. NTU hand: a new design of dexterous hands. *ASME J. Mech. Des.* 120:282–92
63. Kawasaki H. 1999. Mechanism design of anthropomorphic robot hand: Gifu Hand I. *J. Robot. Mechatron.* 11:269–73
64. Fukaya N, Toyama S, Asfour T, Dillmann R. 2000. Design of the TUAT/Karlsruhe humanoid hand. In *2000 IEEE/RSJ International Conference on Intelligent Robots and Systems*, Vol. 3, pp. 1754–59. New York: IEEE
65. Light C, Chappell P. 2000. Development of a lightweight and adaptable multiple-axis hand prosthesis. *Med. Eng. Phys.* 22:679–84
66. Kolluru R, Valavanis KP, Smith S, Tsourveloudis N. 2000. Design fundamentals of a reconfigurable robotic gripper system. *IEEE Trans. Syst. Man Cybernet. A* 30:181–87
67. Keymeulen D, Assad C. 2001. *Investigation of the Harada robot hand for space*. Paper presented at the 2nd IEEE-RAS International Conference on Humanoid Robots, Tokyo, Nov. 22–24
68. Gazeau JP, Zehloul S, Arsicault M, Lallemand JP. 2001. The LMS hand: force and position controls in the aim of the fine manipulation of objects. In *2001 IEEE International Conference on Robotics and Automation*, Vol. 3, pp. 2642–48. New York: IEEE
69. Schulz S, Pylatiuk C, Bretthauer G. 2001. A new ultralight anthropomorphic hand. In *2001 IEEE International Conference on Robotics and Automation*, Vol. 3, pp. 2437–41. New York: IEEE
70. Zhang Y, Han Z, Zhang H, Shang X, Wang T, et al. 2001. Design and control of the BUAA four-fingered hand. In *2001 IEEE International Conference on Robotics and Automation*, Vol. 3, pp. 2517–22. New York: IEEE
71. Dechev N, Cleghorn W, Naumann S. 2001. Multiple finger, passive adaptive grasp prosthetic hand. *Mech. Mach. Theory* 36:1157–73
72. Laliberté T, Birglen L, Gosselin C. 2002. Underactuation in robotic grasping hands. *Mach. Intell. Robot. Control* 4:1–11

73. Massa B, Roccella S, Carrozza MC, Dario P. 2002. Design and development of an underactuated prosthetic hand. In *2002 IEEE International Conference on Robotics and Automation*, Vol. 4, pp. 3374–79. New York: IEEE
74. Yamano I, Takemura K, Maeno T. 2003. Development of a robot finger for five-fingered hand using ultrasonic motors. In *2003 IEEE/RSJ International Conference on Intelligent Robots and Systems*, Vol. 3, pp. 2648–53. New York: IEEE
75. Gao X, Jin M, Jiang L, Xie Z, He P, et al. 2003. The HIT/DLR dexterous hand: work in progress. In *2003 IEEE International Conference on Robotics and Automation*, Vol. 3, pp. 3164–68. New York: IEEE
76. Namiki A, Imai Y, Ishikawa M, Kaneko M. 2003. Development of a high-speed multifingered hand system and its application to catching. In *2003 IEEE/RSJ International Conference on Intelligent Robots and Systems*, Vol. 3, pp. 2666–71. New York: IEEE
77. Pons J, Rocon E, Ceres R, Reynaerts D, Saro B, et al. 2004. The MANUS-HAND dextrous robotics upper limb prosthesis: mechanical and manipulation aspects. *Auton. Robots* 16:143–63
78. Carrozza MC, Suppo C, Sebastiani F, Massa B, Vecchi F, et al. 2004. The SPRING hand: development of a self-adaptive prosthesis for restoring natural grasping. *Auton. Robots* 16:125–41
79. Yokoi H, Arieta AH, Katoh R, Yu W, Watanabe I, Maruishi M. 2004. Mutual adaptation in a prosthetics application. In *Embodied Artificial Intelligence*, ed. F Iida, R Pfeifer, L Steels, Y Kuniyoshi, pp. 146–59. Berlin: Springer
80. Boblan I, Bannasch R, Schwenk H, Prielzel F, Miertsch L, Schulz A. 2004. A human-like robot hand and arm with fluidic muscles: biologically inspired construction and functionality. In *Embodied Artificial Intelligence*, ed. F Iida, R Pfeifer, L Steels, Y Kuniyoshi, pp. 160–79. Berlin: Springer
81. Matsuda H. 2004. Multi-finger hand device. EP Patent Appl. EP20020758875
82. Yang J, Abdel-Malek K, Pitarch EP. 2004. Design and analysis of a cable actuated hand prosthesis. In *ASME 2004 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, Vol. 2, pp. 273–80. New York: Am. Soc. Mech. Eng.
83. Roccella S, Carrozza MC, Cappiello G, Dario P, Cabibihan JJ, et al. 2004. Design, fabrication and preliminary results of a novel anthropomorphic hand for humanoid robotics: RCH-1. In *2004 IEEE/RSJ International Conference on Intelligent Robots and Systems*, Vol. 1, pp. 266–71. New York: IEEE
84. Schulz S, Pylatiuk C, Kargov A, Oberle R, Bretthauer G. 2004. Progress in the development of anthropomorphic fluidic hands for a humanoid robot. In *2004 4th IEEE/RAS International Conference on Humanoid Robots*, Vol. 2, pp. 566–75. New York: IEEE
85. Schulz S, Pylatiuk C, Reischl M, Martin J, Mikut R, Bretthauer G. 2005. A hydraulically driven multi-functional prosthetic hand. *Robotica* 23:293–99
86. Ueda J, Ishida Y, Kondo M, Ogasawara T. 2005. Development of the NAIST-Hand with vision-based tactile fingertip sensor. In *Proceedings of the 2005 IEEE International Conference on Robotics and Automation*, pp. 2332–37. New York: IEEE
87. Kargov A, Asfour T, Pylatiuk C, Oberle R, Klosek H, et al. 2005. Development of an anthropomorphic hand for a mobile assistive robot. In *9th International Conference on Rehabilitation Robotics*, pp. 182–86. New York: IEEE
88. Carrozza MC, Cappiello G, Stellan G, Zaccone F, Vecchi F, et al. 2005. A cosmetic prosthetic hand with tendon driven under-actuated mechanism and compliant joints: ongoing research and preliminary results. In *Proceedings of the 2005 IEEE International Conference on Robotics and Automation*, pp. 2661–66. New York: IEEE
89. Lotti F, Tiezzi P, Vassura G, Biagiotti L, Palli G, Melchiorri C. 2005. Development of UB Hand 3: early results. In *Proceedings of the 2005 IEEE International Conference on Robotics and Automation*, pp. 4488–93. New York: IEEE
90. Choi B, Lee S, Choi HR, Kang S. 2006. Development of anthropomorphic robot hand with tactile sensor: SKKU Hand II. In *2006 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 3779–84. New York: IEEE
91. Maeno T, Hino T. 2006. Miniature five-fingered robot hand driven by shape memory alloy actuators. In *Proceedings of the 12th LASTED International Conference on Robotics and Applications*, ed. MH Hamza, pp. 174–79. Calgary, Can.: ACTA Press

92. Zhao D, Jiang L, Huang H, Jin M, Cai H, Liu H. 2006. Development of a multi-DOF anthropomorphic prosthetic hand. In *2006 IEEE International Conference on Robotics and Biomimetics*, pp. 878–83. New York: IEEE
93. Touch Bionics. 2018. History. *Touch Bionics*. <http://www.touchbionics.com/about/history>
94. Elumotion. 2018. Elumotion website. <http://elumotion.com>
95. Brown CY, Asada HH. 2007. Inter-finger coordination and postural synergies in robot hands via mechanical implementation of principal components analysis. In *2007 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 2877–82. New York: IEEE
96. Zollo L, Roccella S, Guglielmelli E, Carrozza MC, Dario P. 2007. Biomechatronic design and control of an anthropomorphic artificial hand for prosthetic and robotic applications. *IEEE/ASME Trans. Mechatron.* 12:418–29
97. Mouri T, Kawasaki H. 2007. A novel anthropomorphic robot hand and its master slave system. In *Humanoid Robots, Human-Like Machines*, ed. M Hackel, pp. 29–42. Rijeka, Croatia: In Tech
98. Robotiq. 2008. *Robotiq 3-Finger Adaptive Robot Gripper Instruction Manual*. Lévis, Can.: Robotiq. <http://support.robotiq.com/display/IMB/Home>
99. Takamuku S, Fukuda A, Hosoda K. 2008. Repetitive grasping with anthropomorphic skin-covered hand enables robust haptic recognition. In *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 3212–17. New York: IEEE
100. Gaiser I, Schulz S, Kargov A, Klosek H, Bierbaum A, et al. 2008. A new anthropomorphic robotic hand. In *8th IEEE-RAS International Conference on Humanoid Robots*, pp. 418–22. New York: IEEE
101. Gosselin C, Pelletier F, Laliberte T. 2008. An anthropomorphic underactuated robotic hand with 15 dofs and a single actuator. In *2008 IEEE International Conference on Robotics and Automation*, pp. 749–54. New York: IEEE
102. Controzzi M, Cipriani C, Carrozza MC. 2008. Mechatronic design of a transradial cybernetic hand. In *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 576–81. New York: IEEE
103. Liu H, Wu K, Meusel P, Seitz N, Hirzinger G, et al. 2008. Multisensory five-finger dexterous hand: the DLR/HIT Hand II. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 3692–97. New York: IEEE
104. Hong D, Smith C, McCraw A, Guevara C, Cothorn K. 2009. *RAPHaEL: Robotic Air-Powered Hand with Elastic Ligaments*. Paper presented at the 6th International Conference on Ubiquitous Robots and Ambient Intelligence, Gwangju, South Korea, Oct. 29–31
105. Kurita Y, Ono Y, Ikeda A, Ogasawara T. 2009. NAIST Hand 2: human-sized anthropomorphic robot hand with detachable mechanism at the wrist. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 2271–76. New York: IEEE
106. Dalley SA, Wiste TE, Withrow TJ, Goldfarb M. 2009. Design of a multifunctional anthropomorphic prosthetic hand with extrinsic actuation. *IEEE/ASME Trans. Mechatron.* 14:699–706
107. Honda Y, Miyazaki F, Nishikawa A. 2010. Control of pneumatic five-fingered robot hand using antagonistic muscle ratio and antagonistic muscle activity. In *2010 3rd IEEE RAS and EMBS International Conference on Biomedical Robotics and Biomechanics*, pp. 337–42. New York: IEEE
108. Brown E, Rodenberg N, Amend J, Mozeika A, Steltz E, et al. 2010. Universal robotic gripper based on the jamming of granular material. *PNAS* 107:18809–14
109. Dollar AM, Howe RD. 2010. The highly adaptive SDM hand: design and performance evaluation. *Int. J. Robot. Res.* 29:585–97
110. Prensilia. 2010. *IHI Azzurra series*. Data Sheet, Prensilia, Pontedera, Italy. http://mindtrans.narod.ru/pdfs/H1_Azzurra_Hand.pdf
111. Schmitz A, Pattacini U, Nori F, Natale L, Metta G, Sandini G. 2010. Design, realization and sensorization of the dexterous iCub hand. In *2010 10th IEEE-RAS International Conference on Humanoid Robots*, pp. 186–91. New York: IEEE
112. Grebenstein M, Chalon M, Hirzinger G, Siegwart R. 2010. Antagonistically driven finger design for the anthropomorphic DLR Hand Arm System. In *2010 10th IEEE-RAS International Conference on Humanoid Robots*, pp. 609–16. New York: IEEE
113. PAL Robot. 2018. Products. *PAL Robotics*. <https://www.pal-robotics.com/en/products>

114. Kaneko K, Kanehiro F, Morisawa M, Tsuji T, Miura K, et al. 2011. Hardware improvement of cybernetic human HRP-4C for entertainment use. In *2011 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 4392–99. New York: IEEE
115. Ottobock. 2011. Michelangelo prosthetic hand. *Ottobock*. <http://www.ottobockus.com/prosthetics/upper-limb-prosthetics/solution-overview/michelangelo-prosthetic-hand/>
116. Losier Y, Clawson A, Wilson A, Scheme E, Englehart K, et al. 2011. An overview of the UNB hand system. In *MEC '11: Raising the Standard: University of New Brunswick's International Conference on Advanced Limb Prosthetics*, pp. 251–54. Fredericton, Can.: Univ. N.B.
117. Medynski C, Rattray B. 2011. *BeBionic prosthetic design*. In *MEC '11: Raising the Standard: University of New Brunswick's International Conference on Advanced Limb Prosthetics*, pp. 279–82. Fredericton, Can.: Univ. N.B.
118. Chalon M, Wedler A, Baumann A, Bertleff W, Beyer A, et al. 2011. Dexhand: a space qualified multi-fingered robotic hand. In *2011 IEEE International Conference on Robotics and Automation*, pp. 2204–10. New York: IEEE
119. Altobelli DE, Coulter S, Perry NC. 2011. Design considerations in upper extremity prostheses. In *MEC '11: Raising the Standard: University of New Brunswick's International Conference on Advanced Limb Prosthetics*, pp. 255–58. Fredericton, Can.: Univ. N.B.
120. Thayer N, Priya S. 2011. Design and implementation of a dexterous anthropomorphic robotic typing (DART) hand. *Smart Mater. Struct.* 20:035010
121. Yamaguchi A, Takemura K, Yokota S, Edamura K. 2011. A robot hand using electro-conjugate fluid. *Sens. Actuators A* 170:139–46
122. Tincani V, Catalano MG, Farnioli E, Garabini M, Grioli G, et al. 2012. Velvet Fingers: a dexterous gripper with active surfaces. In *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1257–63. New York: IEEE
123. ITK. 2011. The “Handroid”. *ITK*. <http://www.itk-pro.com/en/pro/kindengisyu.htm>
124. Wonik Robot. 2018. History. *Wonik Robotics*. <http://www.simlab.co.kr/History.htm>
125. Baril M, Laliberté T, Gosselin C, Routhier F. 2013. On the design of a mechanically programmable underactuated anthropomorphic prosthetic gripper. *J. Mech. Des.* 135:121008
126. Sandia Natl. Lab. 2012. *The Sandia Hand*. Handout, Sandia Natl. Lab., Albuquerque, NM. http://www.sandia.gov/research/robotics/_assets/documents/SandiaHand_Handout_Final.pdf
127. Grioli G, Catalano M, Silvestro E, Tono S, Bicchi A. 2012. Adaptive synergies: an approach to the design of under-actuated robotic hands. In *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1251–56. New York: IEEE
128. Deimel R, Brock O. 2013. A compliant hand based on a novel pneumatic actuator. In *2013 IEEE International Conference on Robotics and Automation*, pp. 2047–53. New York: IEEE
129. Ueno S, Takemura K, Yokota S, Edamura K. 2013. Micro flexible robot hand using electro-conjugate fluid. In *Micro/Nano Materials, Devices, and Applications*, ed. J Friend, HH Tan, chap. 89234U. Proc. SPIE Vol. 8923. Bellingham, WA: Soc. Photo-Opt. Instrum. Eng.
130. Robotiq. 2015. *Robotiq product list*. Prod. List, Robotiq, Lévis, Can. <https://www.shopcross.com/sites/default/files/data-sheets/Robotiq-Product-List-Catalog.pdf>
131. Melchiorri C, Palli G, Berselli G, Vassura G. 2013. Development of the UB Hand IV: overview of design solutions and enabling technologies. *IEEE Robot. Autom. Mag.* 20:72–81
132. Vincent Syst. 2018. VINCENTevolution 3. *Vincent Systems*. <https://vincentsystems.de/en/prosthetics/vincent-evolution-3>
133. Deshpande AD, Xu Z, Weghe MJV, Brown BH, Ko J, et al. 2013. Mechanisms of the anatomically correct testbed hand. *IEEE/ASME Trans. Mechatron.* 18:238–50
134. Tavakoli M, de Almeida AT. 2014. Adaptive under-actuated anthropomorphic hand: ISR-SoftHand. In *2014 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1629–34. New York: IEEE
135. Odhner LU, Jentoft LP, Claffee MR, Corson N, Tenzer Y, et al. 2014. A compliant, underactuated hand for robust manipulation. *Int. J. Robot. Res.* 33:736–52

136. Sensinger J, Lipsey J, Sharkey T, Thomas A, Miller L, et al. 2014. Initial experiences with the RIC arm. In *MEC '14: Redefining the Norm: University of New Brunswick's Myoelectric Controls/Powered Prosthetics Symposium*, pp. 223–25. Fredericton, Can.: Univ. N.B.
137. Stuart H, Wang S, Gardineer B, Christensen DL, Aukes DM, Cutkosky MR. 2014. A compliant underactuated hand with suction flow for underwater mobile manipulation. In *2014 IEEE International Conference on Robotics and Automation*, pp. 6691–97. New York: IEEE
138. Ciocarlie M, Hicks FM, Holmberg R, Hawke J, Schlicht M, et al. 2014. The Velo gripper: a versatile single-actuator design for enveloping, parallel and fingertip grasps. *Int. J. Robot. Res.* 33:753–67
139. Hassan T, Manti M, Passetti G, d'Elia N, Cianchetti M, Laschi C. 2015. Design and development of a bio-inspired, under-actuated soft gripper. In *2015 37th Annual International Conference of the IEEE Engineering in Medicine and Biology Society*, pp. 3619–22. New York: IEEE
140. Della Santina C, Grioli G, Catalano M, Brando A, Bicchi A. 2015. Dexterity augmentation on a synergistic hand: the Pisa/IIT SoftHand+. In *2015 IEEE-RAS 15th International Conference on Humanoid Robots*, pp. 497–503. New York: IEEE
141. Chen W, Xiong C, Yue S. 2015. Mechanical implementation of kinematic synergy for continual grasping generation of anthropomorphic hand. *IEEE/ASME Trans. Mechatron.* 20:1249–63
142. Radford NA, Strawser P, Hambuchen K, Mehling JS, Verdeyen WK, et al. 2015. Valkyrie: NASA's first bipedal humanoid robot. *J. Field Robot.* 32:397–419
143. Simone F, York A, Seelecke S. 2015. Design and fabrication of a three-finger prosthetic hand using SMA muscle wires. In *Bioinspiration, Biomimetics, and Bioreplication 2015*, ed. A Lakhtakia, M Knez, RJ Martín-Palma, chap. 94290T. Proc. SPIE Vol. 9429. Bellingham, WA: Soc. Photo-Opt. Instrum. Eng.
144. Ceccarelli M, Zottola M. 2017. Design and simulation of an underactuated finger mechanism for LARM hand. *Robotica* 35:483–97
145. Homberg BS, Katschmann RK, Dogar MR, Rus D. 2015. Haptic identification of objects using a modular soft robotic gripper. In *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1698–705. New York: IEEE
146. van der Riet D, Stopforth R, Bright G, Diegel O. 2015. The low cost design of a 3D printed multi-fingered myoelectric prosthetic hand. In *Mechatronics: Principles, Technologies and Applications*, ed. E Brusa, pp. 85–117. New York: Nova Sci.
147. Wu FY, Asada HH. 2015. “Hold-and-manipulate” with a single hand being assisted by wearable extra fingers. In *2015 IEEE International Conference on Robotics and Automation*, pp. 6205–12. New York: IEEE
148. Niiyama R, Sun X, Sung C, An B, Rus D, Kim S. 2015. Pouch motors: printable soft actuators integrated with computational design. *Soft Robot.* 2:59–70
149. Tavakoli M, Lopes P, Lourenço J, Rocha RP, Giliberto L, et al. 2017. Autonomous selection of closing posture of a robotic hand through embodied soft matter capacitive sensors. *IEEE Sens. J.* 17:5669–77
150. Hawkes EW, Christensen DL, Han AK, Jiang H, Cutkosky MR. 2015. Grasping without squeezing: shear adhesion gripper with fibrillar thin film. In *2015 IEEE International Conference on Robotics and Automation*, pp. 2305–12. New York: IEEE
151. Franchi G, ten Pas A, Platt R, Panzieri S. 2015. The Baxter Easyhand: a robot hand that costs \$150 US in parts. In *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 2917–22. New York: IEEE
152. Xu Z, Todorov E. 2016. Design of a highly biomimetic anthropomorphic robotic hand towards artificial limb regeneration. In *2016 IEEE International Conference on Robotics and Automation*, pp. 3485–92. New York: IEEE
153. Cerruti G, Chablat D, Gouaillier D, Sakka S. 2016. Alpha: a hybrid self-adaptable hand for a social humanoid robot. In *2016 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 900–6. New York: IEEE
154. Piazza C, Della Santina C, Catalano M, Grioli G, Garabini M, Bicchi A. 2016. SoftHand Pro-D: matching dynamic content of natural user commands with hand embodiment for enhanced prosthesis control. In *2016 IEEE International Conference on Robotics and Automation*, pp. 3516–23. New York: IEEE
155. Backus SB, Dollar AM. 2016. An adaptive three-fingered prismatic gripper with passive rotational joints. *IEEE Robot. Autom. Lett.* 1:668–75

156. Godfrey SB, Bianchi M, Zhao K, Catalano MG, Breighner R, et al. 2016. The SoftHand Pro: translation from robotic hand to prosthetic prototype. In *Converging Clinical and Engineering Research on Neurorehabilitation II: Biosystems and Biorobotics*, ed. J Ibáñez, J González-Vargas, J Azorín, M Akay, J Pons, pp. 469–73. Cham, Switz.: Springer
157. Galloway KC, Becker KP, Phillips B, Kirby J, Licht S, et al. 2016. Soft robotic grippers for biological sampling on deep reefs. *Soft Robot.* 3:23–33
158. Open Bionics. 2016. *ADA V1.1*. Data Sheet, Open Bionics, Bristol, UK. https://openbionicslabs.com/s/Ada_v1_1_Datasheet.pdf
159. Zhao H, O'Brien K, Li S, Shepherd RF. 2016. Optoelectronically innervated soft prosthetic hand via stretchable optical waveguides. *Sci. Robot.* 1:eaai7529
160. Kim HI, Han MW, Song SH, Ahn SH. 2016. Soft morphing hand driven by SMA tendon wire. *Composites B* 105:138–48
161. Atasoy A, Kaya E, Toptas E, Kuchimov S, Kaplanoglu E, Ozkan M. 2016. 24 DOF EMG controlled hybrid actuated prosthetic hand. In *2016 IEEE 38th Annual International Conference of the Engineering in Medicine and Biology Society*, pp. 5059–62. New York: IEEE
162. She Y, Chen J, Shi H, Su HJ. 2016. Modeling and validation of a novel bending actuator for soft robotics applications. *Soft Robot.* 3:71–81
163. Shintake J, Rosset S, Schubert B, Floreano D, Shea H. 2016. Versatile soft grippers with intrinsic electroadhesion based on multifunctional polymer actuators. *Adv. Mater.* 28:231–38
164. Wise M, Ferguson M, King D, Diehr E, Dymesich D. 2016. *Fetch and Freight: standard platforms for service robot applications*. Paper presented at the 25th International Joint Conference on Artificial Intelligence, New York, July 9–15
165. Wang Z, Torigoe Y, Hirai S. 2017. A prestressed soft gripper: design, modeling, fabrication, and tests for food handling. *IEEE Robot. Autom. Lett.* 2:1909–16
166. Zhou J, Chen S, Wang Z. 2017. A soft-robotic gripper with enhanced object adaptation and grasping reliability. *IEEE Robot. Autom. Lett.* 2:2287–93
167. Mottard A, Laliberté T, Gosselin C. 2017. Underactuated tendon-driven robotic/prosthetic hands: design issues. In *Robotics: Science and Systems XIII*, ed. N Amato, S Srinivasa, N Ayanian, S Kuindersma, chap. 19. N.p.: Robot. Sci. Syst. Found.
168. Controzzi M, Clemente F, Barone D, Ghionzoli A, Cipriani C. 2017. The SSSA-MyHand: a dexterous lightweight myoelectric hand prosthesis. *IEEE Trans. Neural Syst. Rehabil. Eng.* 25:459–68
169. Zappatore GA, Reina G, Messina A. 2017. Adam's hand: an underactuated robotic end-effector. In *Advances in Italian Mechanism Science*, ed. G Boschetti, A Gasparetto, pp. 239–46. Cham, Switz.: Springer
170. Amend J, Lipson H. 2017. The JamHand: dexterous manipulation with minimal actuation. *Soft Robot.* 4:70–80
171. Lee DH, Park JH, Park SW, Baeg MH, Bae JH. 2017. KITECH-Hand: a highly dexterous and modularized robotic hand. *IEEE/ASME Trans. Mechatron.* 22:876–87
172. Gopura R, Bandara D, Gunasekera N, Hapuarachchi V, Ariyaratna B. 2017. A prosthetic hand with self-adaptive fingers. In *2017 3rd International Conference on Control, Automation and Robotics*, pp. 269–74. New York: IEEE
173. Li Y, Chen Y, Yang Y, Wei Y. 2017. Passive particle jamming and its stiffening of soft robotic grippers. *IEEE Trans. Robot.* 33:446–55
174. Tian M, Xiao Y, Wang X, Chen J, Zhao W. 2017. Design and experimental research of pneumatic soft humanoid robot hand. In *Robot Intelligence Technology and Applications 4*, ed. JH Kim, F Karray, J Jo, P Sincak, H Myung, pp. 469–78. Cham, Switz.: Springer
175. Mio R, Villegas B, Ccorimanya L, Flores KM, Salazar G, Elías D. 2017. Development and assessment of a powered 3D-printed prosthetic hand for transmetacarpal amputees. In *2017 3rd International Conference on Control, Automation and Robotics*, pp. 85–90. New York: IEEE
176. Wen L, Li Y, Cong M, Lang H, Du Y. 2017. Design and optimization of a tendon-driven robotic hand. In *2017 IEEE International Conference on Industrial Technology*, pp. 767–72. New York: IEEE
177. Wiste T, Goldfarb M. 2017. Design of a simplified compliant anthropomorphic robot hand. In *2017 IEEE International Conference on Robotics and Automation*, pp. 3433–38. New York: IEEE

178. Mishra AK, Del Dottore E, Sadeghi A, Mondini A, Mazzolai B. 2017. SIMBA: tendon-driven modular continuum arm with soft reconfigurable gripper. *Front. Robot. AI* 4:4
179. Nishimura T, Mizushima K, Suzuki Y, Tsuji T, Watanabe T. 2017. Variable-grasping-mode underactuated soft gripper with environmental contact-based operation. *IEEE Robot. Autom. Lett.* 2:1164–71
180. Hao Y, Wang T, Ren Z, Gong Z, Wang H, et al. 2017. Modeling and experiments of a soft robotic gripper in amphibious environments. *Int. J. Adv. Robot. Syst.* 14(4). <https://doi.org/10.1177/1729881417724191>
181. Wu L, de Andrade MJ, Saharan LK, Rome RS, Baughman RH, Tadesse Y. 2017. Compact and low-cost humanoid hand powered by nylon artificial muscles. *Bioinspirat. Biomimet.* 12:026004
182. Bircher WG, Dollar AM, Rojas N. 2017. A two-fingered robot gripper with large object reorientation range. In *2017 IEEE International Conference on Robotics and Automation*, pp. 3453–60. New York: IEEE
183. McCann CM, Dollar AM. 2017. Design of a Stewart platform-inspired dexterous hand for 6-DOF within-hand manipulation. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1158–63. New York: IEEE
184. Ren Z, Zhou C, Xin S, Tsagarakis N. 2017. HERI hand: a quasi dexterous and powerful hand with asymmetrical finger dimensions and under actuation. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 322–28. New York: IEEE
185. Ho V, Hirai S. 2017. Design and analysis of a soft-fingered hand with contact feedback. *IEEE Robot. Autom. Lett.* 2:491–98
186. Jeong SH, Kim KS, Kim S. 2017. Designing anthropomorphic robot hand with active dual-mode twisted string actuation mechanism and tiny tension sensors. *IEEE Robot. Autom. Lett.* 2:1571–78
187. Ko T, Kaminaga H, Nakamura Y. 2017. Underactuated four-fingered hand with five electro hydrostatic actuators in cluster. In *2017 IEEE International Conference on Robotics and Automation*, pp. 620–25. New York: IEEE
188. Piazza C, Catalano MG, Godfrey SB, Rossi M, Grioli G, et al. 2017. The SoftHand Pro-H: a hybrid body-controlled, electrically powered hand prosthesis for daily living and working. *IEEE Robot. Autom. Mag.* 24:87–101
189. Liu Y, Jiang L, Fan S, Yang D, Zhao J, Liu H. 2017. A novel actuation configuration of robotic hand and the mechanical implementation via postural synergies. In *2017 IEEE International Conference on Robotics and Automation*, pp. 2215–22. New York: IEEE
190. Choi KY, Akhtar A, Bretl T. 2017. A compliant four-bar linkage mechanism that makes the fingers of a prosthetic hand more impact resistant. In *2017 IEEE International Conference on Robotics and Automation*, pp. 6694–99. New York: IEEE
191. Low JH, Lee WW, Khin PM, Thakor NV, Kukreja SL, et al. 2017. Hybrid tele-manipulation system using a sensorized 3-D-printed soft robotic gripper and a soft fabric-based haptic glove. *IEEE Robot. Autom. Lett.* 2:880–87
192. Hasegawa S, Wada K, Niitani Y, Okada K, Inaba M. 2017. A three-fingered hand with a suction gripping system for picking various objects in cluttered narrow space. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1164–71. New York: IEEE
193. Schaler EW, Ruffatto D, Glick P, White V, Parness A. 2017. An electrostatic gripper for flexible objects. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1172–79. New York: IEEE
194. Arns M, Laliberté T, Gosselin C. 2017. Design, control and experimental validation of a haptic robotic hand performing human-robot handshake with human-like agility. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 4626–33. New York: IEEE
195. Low J, Cheng N, Khin P, Thakor N, Kukreja S, et al. 2017. A bidirectional soft pneumatic fabric-based actuator for grasping applications. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1180–86. New York: IEEE
196. Makino S, Kawaharazuka K, Kawamura M, Asano Y, Okada K, Inaba M. 2017. High-power, flexible, robust hand: development of musculoskeletal hand using machined springs and realization of self-weight supporting motion with humanoid. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1187–92. New York: IEEE

197. Stavenuiter RA, Birglen L, Herder JL. 2017. A planar underactuated grasper with adjustable compliance. *Mech. Mach. Theory* 112:295–306
198. Wang N, Lao K, Zhang X. 2017. Design and myoelectric control of an anthropomorphic prosthetic hand. *J. Bionic Eng.* 14:47–59
199. Scharff RB, Doubrovski EL, Poelman WA, Jonker PP, Wang CC, Geraedts JM. 2017. Towards behavior design of a 3D-printed soft robotic hand. In *Soft Robotics: Trends, Applications and Challenges*, ed. C Laschi, J Rossiter, F Iida, M Cianchetti, L Margheri, pp. 23–29. Cham, Switz.: Springer
200. Yang Y, Zhang W, Xu X, Hu H, Hu J. 2017. LIPSA hand: a novel underactuated hand with linearly parallel and self-adaptive grasp. In *Mechanism and Machine Science*, ed. X Zhang, N Wang, Y Huang, pp. 111–19. Singapore: Springer
201. Taska Prosthet. 2018. Taska Prosthetics website. <http://www.taskaprosthetics.com>
202. Terryn S, Brancart J, Lefeber D, Van Assche G, Vanderborght B. 2017. Self-healing soft pneumatic robots. *Sci. Robot.* 2:eaan4268
203. Ma R, Dollar A. 2017. Yale OpenHand project: optimizing open-source hand designs for ease of fabrication and adoption. *IEEE Robot. Autom. Mag.* 24:32–40
204. Glick P, Suresh S, Ruffatto D, Cutkosky M, Tolley MT, Parness A. 2018. A soft robotic gripper with gecko-inspired adhesive. *IEEE Robot. Autom. Lett.* 3:903–10
205. Faudzi AAM, Ooga J, Goto T, Takeichi M, Suzumori K. 2018. Index finger of a human-like robotic hand using thin soft muscles. *IEEE Robot. Autom. Lett.* 3:92–99
206. Jianshu Z, Xiaojiao C, Jing L, Yinan T, Zheng W. 2018. A soft robotic approach to robust and dexterous grasping. In *2018 IEEE International Conference on Soft Robotics (RoboSoft)*, pp. 412–17. New York: IEEE
207. Hongying Z, Kumar AS, Fuh JYH, Wang MY. 2018. Topology optimized design, fabrication and evaluation of a multimaterial soft gripper. In *2018 IEEE International Conference on Soft Robotics (RoboSoft)*, pp. 424–30. New York: IEEE
208. Nassour J, Ghadiya V, Hugel V, Hamker FH. 2018. Design of new sensory soft hand: combining air-pump actuation with superimposed curvature and pressure sensors. In *2018 IEEE International Conference on Soft Robotics (RoboSoft)*, pp. 164–69. New York: IEEE
209. Yuen MCS, Lear TR, Tonoyan H, Telleria M, Kramer-Bottiglio R. 2018. Toward closed-loop control of pneumatic grippers during pack-and-deploy operations. *IEEE Robot. Autom. Lett.* 3:1402–9
210. Rehab Technol. Lab. 2018. Sviluppo dispositivi medici. *Rehab Technologies Lab.* <http://rehab.iit.it/sviluppo-dispositivi>
211. Pedro P, Ananda C, Rafael PB, Carlos AR, Alexandre BC. 2018. Closed structure soft robotic gripper. In *2018 IEEE International Conference on Soft Robotics (RoboSoft)*, pp. 66–70. New York: IEEE
212. Chen F, Xu W, Zhang H, Wang Y, Cao J, et al. 2018. Topology optimized design, fabrication, and characterization of a soft cable-driven gripper. *IEEE Robot. Autom. Lett.* 3:2463–70
213. Mizushima K, Oku T, Suzuki Y, Tsuji T, Watanabe T. 2018. Multi-fingered robotic hand based on hybrid mechanism of tendon-driven and jamming transition. In *2018 IEEE International Conference on Soft Robotics (RoboSoft)*, pp. 376–81. New York: IEEE
214. Tianjian C, Maximilian HH, Matei C. 2018. Underactuated hand design using mechanically realizable manifolds. In *2018 IEEE International Conference on Robotics and Automation*. New York: IEEE. Forthcoming
215. Morrison D, Tow A, McTaggart M, Smith R, Kelly-Boxall N, et al. 2018. Cartman: the low-cost Cartesian manipulator that won the Amazon Robotics Challenge. In *2018 IEEE International Conference on Robotics and Automation*. New York: IEEE. Forthcoming
216. Alspach A, Kim J, Yamane K. 2018. Design and fabrication of a soft robotic hand and arm system. In *2018 IEEE International Conference on Soft Robotics (RoboSoft)*, pp. 369–95. New York: IEEE
217. Nagamanikandan G, Sai SVK, Karthik C, Thondiyath A. 2018. GraspMan: a novel robotic platform with grasping, manipulation, and multimodal locomotion capability. In *2018 IEEE International Conference on Robotics and Automation*. New York: IEEE. Forthcoming

218. Castellini C, Van Der Smagt P, Sandini G, Hirzinger G. 2008. Surface EMG for force control of mechanical hands. In *2008 IEEE International Conference on Robotics and Automation*, pp. 725–30. New York: IEEE
219. Belter JT, Leddy MT, Gemmell KD, Dollar AM. 2016. Comparative clinical evaluation of the Yale Multigrasp Hand. In *2016 6th IEEE International Conference on Biomedical Robotics and Biomechanics*, pp. 528–35. New York: IEEE
220. Kargov A, Ivlev O, Pylatiuk C, Asfour T, Schulz S, et al. 2007. Applications of a fluidic artificial hand in the field of rehabilitation. In *Rehabilitation Robotics*, ed. SS Kommu, pp. 261–86. Rijeka, Croatia: InTech
221. Vogel J, Haddadin S, Jarosiewicz B, Simeral JD, Bacher D, et al. 2015. An assistive decision-and-control architecture for force-sensitive hand–arm systems driven by human–machine interfaces. *Int. J. Robot. Res.* 34:763–80
222. Leidner D, Borst C, Dietrich A, Beetz M, Albu-Schäffer A. 2015. Classifying compliant manipulation tasks for automated planning in robotics. In *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 1769–76. New York: IEEE
223. Romay A, Kohlbrecher S, Conner DC, Stumpf A, von Stryk O. 2014. Template-based manipulation in unstructured environments for supervised semi-autonomous humanoid robots. In *2014 14th IEEE-RAS International Conference on Humanoid Robots*, pp. 979–86. New York: IEEE
224. Cerulo I, Ficuciello F, Lippiello V, Siciliano B. 2017. Teleoperation of the SCHUNK S5FH underactuated anthropomorphic hand using human hand motion tracking. *Robot. Auton. Syst.* 89:75–84
225. Ambrose RO, Aldridge H, Askew RS, Burrige RR, Bluethmann W, et al. 2000. Robonaut: NASA's space humanoid. *IEEE Intell. Syst. Their Appl.* 15:57–63
226. Knoop E, Bächer M, Wall V, Deimel R, Brock O, Beardsley P. 2017. Handshakiness: benchmarking for human-robot hand interactions. In *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 4982–89. New York: IEEE
227. Asfour T, Regenstern K, Azad P, Schroder J, Bierbaum A, et al. 2006. ARMAR-III: an integrated humanoid platform for sensory-motor control. In *2006 6th IEEE-RAS International Conference on Humanoid Robots*, pp. 169–75. New York: IEEE
228. Albu-Schäffer A, Haddadin S, Ott C, Stemmer A, Wimböck T, Hirzinger G. 2007. The DLR lightweight robot: design and control concepts for robots in human environments. *Ind. Robot* 34:376–85
229. Johnson M, Shrewsbury B, Bertrand S, Wu T, Duran D, et al. 2015. Team IHMC's lessons learned from the DARPA Robotics Challenge Trials. *J. Field Robot.* 32:192–208
230. Borst C, Fischer M, Haidacher S, Liu H, Hirzinger G. 2003. DLR Hand II: experiments and experience with an anthropomorphic hand. In *2003 IEEE International Conference on Robotics and Automation*, Vol. 1, pp. 702–7. New York: IEEE
231. Nat. Mach. Motion Init. 2017. Natural Machine Motion Initiative website. <https://www.naturalmachinemotioninitiative.com>
232. Tech. Univ. Berlin. 2016. Soft Hands. *Technische Universität Berlin Department of Computer Engineering and Microelectronics*. http://www.robotics.tu-berlin.de/menu/research/soft_hands
233. e-NABLE. 2018. About us. *Enabling the Future*. <http://enablingthefuture.org/about>
234. Liarokapis MV, Zisimatos AG, Mavrogiannis CI, Kyriakopoulos KJ. 2014. *OpenBionics: an open-source initiative for the creation of affordable, modular, light-weight, underactuated robot hands and prosthetic devices*. Paper presented at the 2nd Arizona State University Rehabilitation Robotics Workshop, Tempe, Feb. 28–Mar. 1
235. Shintake J, Cacucciolo V, Floreano D, Shea H. 2018. Soft robotic grippers. *Adv. Mater.* 30:1707035
236. Hughes J, Culha U, Giardina F, Guenther F, Rosendo A, Iida F. 2016. Soft manipulators and grippers: a review. *Front. Robot. AI* 3:69
237. Ulrich N, Kumar V. 1988. Grasping using fingers with coupled joints. In *Trends and Developments in Mechanisms, Machines and Robotics*, ed. A Midha, pp. 201–8. New York: Am. Soc. Mech. Eng.
238. Lee S. 1990. *Artificial dexterous hand*. US Patent 4,955,918
239. Birglen L, Laliberté T, Gosselin CM. 2007. *Underactuated Robotic Hands*. Berlin: Springer

240. Easton TA. 1972. On the normal use of reflexes: The hypothesis that reflexes form the basic language of the motor program permits simple, flexible specifications of voluntary movements and allows fruitful speculation. *Am. Sci.* 60:591–99
241. Prattichizzo D, Malvezzi M, Bicchi A. 2010. On motion and force control of grasping hands with postural synergies. In *Robotics: Science and Systems VI*, ed. Y Matsuoka, H Durrant-Whyte, J Neira, pp. 49–56. Cambridge, MA: MIT Press
242. Ciocarlie M, Goldfeder C, Allen P. 2007. *Dexterous grasping via eigengrasps: a low-dimensional approach to a high-complexity problem*. Paper presented at the 3rd Robotics: Science and Systems Conference, Atlanta, June 27–30
243. Bonilla M, Farnioli E, Piazza C, Catalano M, Grioli G, et al. 2014. Grasping with soft hands. In *2014 14th IEEE-RAS International Conference on Humanoid Robots*, pp. 581–87. New York: IEEE
244. Eppner C, Deimel R, Álvarez-Ruiz J, Maertens M, Brock O. 2015. Exploitation of environmental constraints in human and robotic grasping. *Int. J. Robot. Res.* 34:1021–38
245. Cannata G, Maggiali M, Metta G, Sandini G. 2008. An embedded artificial skin for humanoid robots. In *2008 IEEE International Conference on Multisensor Fusion and Integration for Intelligent Systems*, pp. 434–38. New York: IEEE
246. Wall V, Zöllner G, Brock O. 2017. A method for sensorizing soft actuators and its application to the RBO Hand 2. In *2017 IEEE International Conference on Robotics and Automation*, pp. 4965–70. New York: IEEE
247. Lessing JA, Whitesides GM, Martinez RV, Yang D, Mosadegh B, et al. 2017. *Sensors for soft robots and soft actuators*. US Patent Appl. 15/503549
248. Falco J, Van Wyk K, Liu S, Carpin S. 2015. Grasping the performance: facilitating replicable performance measures via benchmarking and standardized methodologies. *IEEE Robot. Autom. Mag.* 22:125–36
249. Grebenstein M, Albu-Schäffer A, Bahls T, Chalon M, Eiberger O, et al. 2011. The DLR hand arm system. In *2011 IEEE International Conference on Robotics and Automation*, pp. 3175–82. New York: IEEE
250. Zisimatos AG, Liarokapis MV, Mavrogiannis CI, Kyriakopoulos KJ. 2014. Open-source, affordable, modular, light-weight, underactuated robot hands. In *2014 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 3207–12. New York: IEEE
251. Bierbaum A, Rambow M, Asfour T, Dillmann R. 2009. Grasp affordances from multi-fingered tactile exploration using dynamic potential fields. In *9th IEEE-RAS International Conference on Humanoid Robots*, pp. 168–74. New York: IEEE
252. Herzog A, Pastor P, Kalakrishnan M, Righetti L, Bohg J, et al. 2014. Learning of grasp selection based on shape-templates. *Auton. Robots* 36:51–65