



## Correction to: Rotation Forest for multi-target regression

Juan J. Rodríguez<sup>1</sup> · Mario Juez-Gil<sup>1</sup> · Carlos López-Nozal<sup>1</sup> · Álgar Arnaiz-González<sup>1</sup> 

Published online: 25 July 2021

© Springer-Verlag GmbH Germany, part of Springer Nature 2021

**Correction to:**  
**International Journal of Machine Learning and Cybernetics**  
<https://doi.org/10.1007/s13042-021-01329-1>

Unfortunately, Figs. 1 and 2 were published incorrectly in the online published article. The correct Figs. 1 and 2 are given below.

---


The original article can be found online at <https://doi.org/10.1007/s13042-021-01329-1>.

---


✉ Álgar Arnaiz-González  
alvarag@ubu.es

Juan J. Rodríguez  
jjrodriguez@ubu.es

<sup>1</sup> Department of Computer Science, Universidad de Burgos,  
Avda. Cantabria s/n, 09006 Burgos, Spain

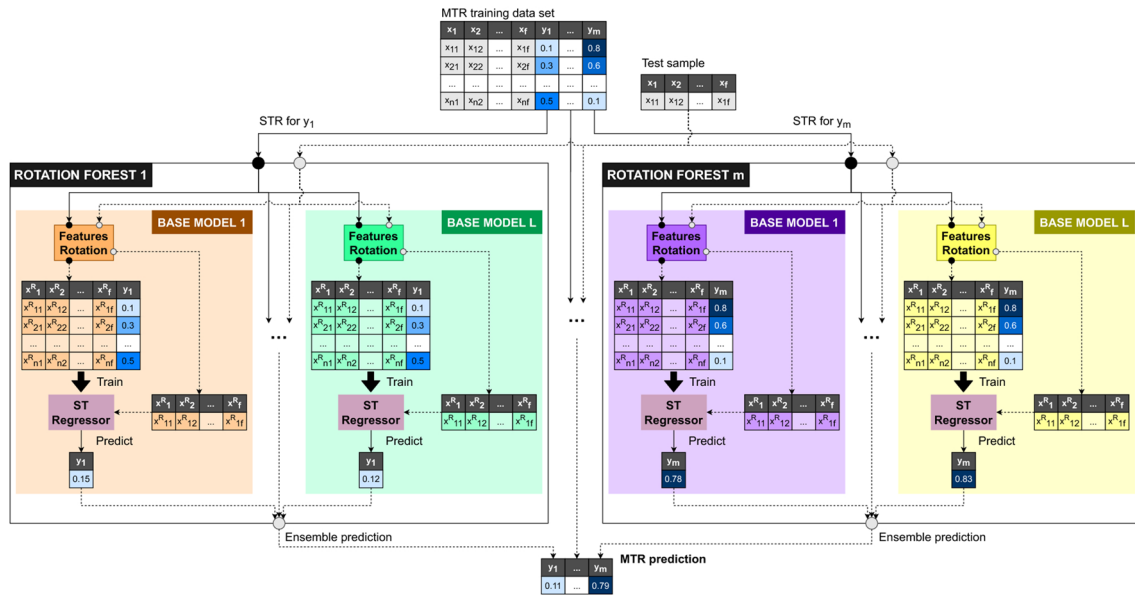

**Fig. 1** An example of using Rotation Forest for MTR by means of ST. As many rotations (each one depicted with a different color) as the number of single-target tasks multiplied by the ensemble size ( $m \times L$ ), are performed

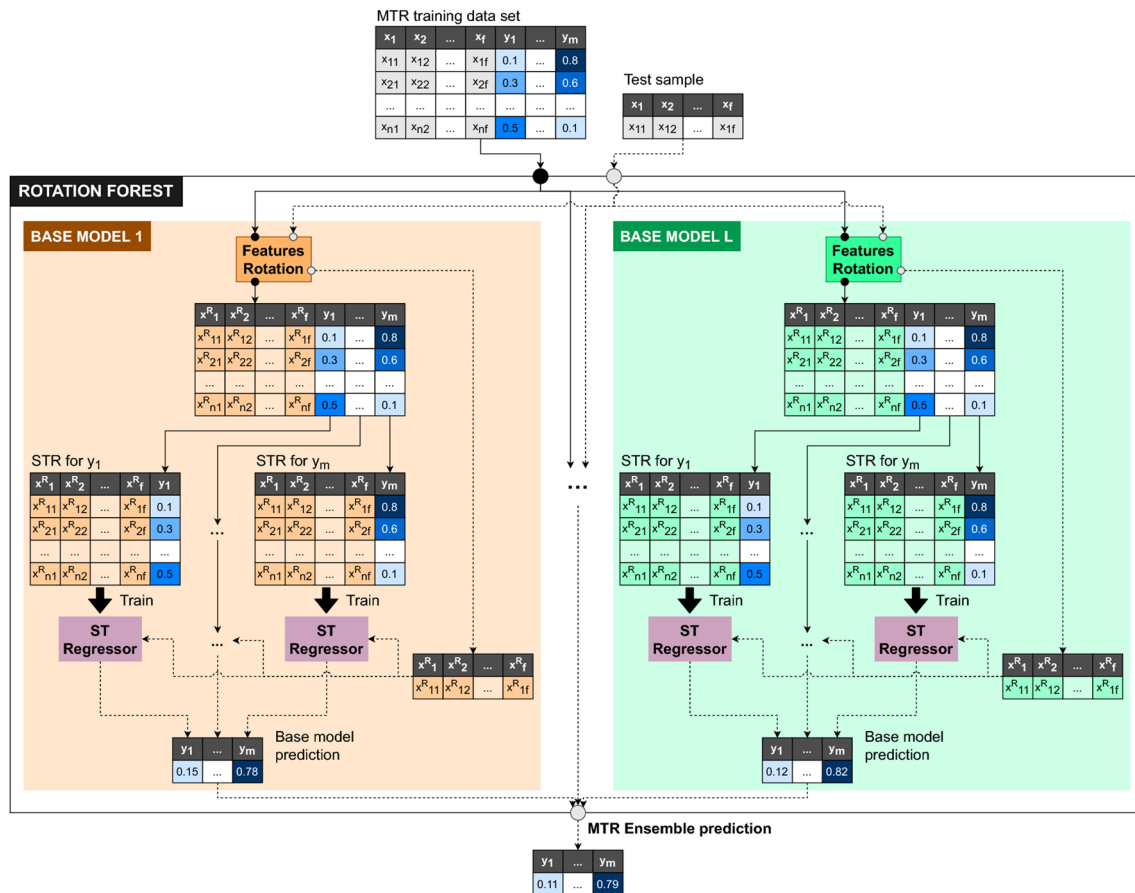

**Fig. 2** An example of the Rotation Forest ensemble proposed in this paper, where data set rotation is performed before applying the MTR approach. All single-target tasks of a specific base model share the same rotation of the data (depicted using the same color)