A Higher Order Perturbative Parton Evolution Toolkit (HOPPET)

G. P. Salam and J. Rojo

LPTHE,

UPMC – Univ. Paris 6,

Université Paris Diderot – Paris 7,

CNRS UMR 7589,

75252 Paris cedex 05, France

Abstract

This document describes a Fortran 95 package for carrying out DGLAP evolution and other common manipulations of parton distribution functions (PDFs). The PDFs are represented on a grid in x-space so as to avoid limitations on the functional form of input distributions. Good speed and accuracy are obtained through the representation of splitting functions in terms of their convolution with a set of piecewise polynomial basis functions, and Runge-Kutta techniques are used for the evolution in Q. Unpolarised evolution is provided to NNLO, including heavy-quark thresholds in the $\overline{\rm MS}$ scheme, and longitudinally polarised evolution to NLO. The code is structured so as to provide simple access to the objects representing splitting functions and PDFs, making it possible for a user to extend the facilities already provided. A streamlined interface is also available, facilitating use of the evolution part of the code from F77 and C/C++.

Program Summary

Title of program: HOPPET

Version: 1.1

Catalogue identifier:

Program obtainable from: http://projects.hepforge.org/hoppet/

Distribution format: compressed tar file

E-mail: salam@lpthe.jussieu.fr, rojo@lpthe.jussieu.fr

License: GNU Public License

Computers: all

Operating systems: all

Program language: Fortran 95

Memory required to execute: $\leq 10 \text{ MB}$

Other programs called: none External files needed: none

Number of bytes in distributed program, including test data etc.: $\sim 270~\mathrm{kB}$

Keywords: unpolarised and longitudinally polarised parton space-like distribution functions (PDFs), DGLAP evolution equations, x-space solutions.

Nature of the physical problem: Solution of the DGLAP evolution equations up to NNLO (NLO) for unpolarised (longitudinally polarised) PDFs, and provision of tools to facilitate manipulation (convolutions, etc.) of PDFs with user-defined coefficient and splitting functions.

Method of solution: representation of PDFs on a grid in x, adaptive integration of splitting functions to reduce them to a discretised form, obtaining fast convolutions that are equivalent to integration with an interpolated form of the PDFs; Runge Kutta solution of the Q evolution, and its caching so as to speed up repeated evolution with different initial conditions.

Restrictions on complexity of the problem: PDFs should be smooth on the scale of the discretisation in x.

Typical running time: a few seconds for initialisation, then ~ 10 ms for creating a tabulation with a relative accuracy of 10^{-4} from a new initial condition (on a 3.4 GHz Pentium IV processor). Further details in Sect. 9.2.

Contents

1	Introduction			
2	Perturbative evolution in QCD	7		
3	Numerical techniques 3.1 Higher order matrix representation	9 9 11		
4	Single-flavour grids and convolutions 4.1 Grid definitions (grid_def)	12 13 14 16 17		
5	Multi-flavour grids and convolutions5.1Full-flavour PDFs and flavour representations5.1.1Human representation5.1.2Evolution representation5.2Splitting function matrices5.2.1Derived splitting matrices5.3The DGLAP convolution components5.3.1QCD constants5.3.2DGLAP splitting matrices5.3.3Mass threshold matrices5.3.4Putting it together: dglap_holder	18 18 20 21 22 23 23 24 25 26		
6 7	DGLAP evolution 6.1 Running coupling	27 28 29 29 31 31		
•	7.1 Preparing a PDF table	31		
8	Streamlined interface 8.1 Initialisation	34 35		

9	Benchmarks			
	9.1 Accuracy	37		
	9.2 Timing			
10	Conclusions	42		
\mathbf{A}	Example programs	44		
	A.1 General interface	44		
	A.2 Streamlined interface	47		
	A.3 Accessing tables	48		
В	HOPPET reference guide	49		
\mathbf{C}	Initialisation of grid quantities	49		
D	NNLO splitting functions	52		
\mathbf{E}	Useful tips on Fortran 95	53		

1 Introduction

There has been considerable discussion over the past years (e.g. [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]) of numerical solutions of the Dokshitzer-Gribov-Lipatov-Altarelli-Parisi (DGLAP) equation [11] for the Quantum Chromodynamics (QCD) evolution of parton distribution functions (PDFs).

The DGLAP equation [11] is a renormalisation group equation for the quantity $q_i(x, Q^2)$, the density of partons of type (or flavour) i carrying a fraction x of the longitudinal momentum of a hadron, when resolved at a scale Q. It is one of the fundamental equations of perturbative QCD, being central to all theoretical predictions for hadron-hadron and lepton-hadron colliders.

Technically, it is a matrix integro-differential equation,

$$\frac{\partial q_i(x, Q^2)}{\partial \ln Q^2} = \frac{\alpha_s(Q^2)}{2\pi} \int_x^1 \frac{dz}{z} P_{ij}\left(z, \alpha_s\left(Q^2\right)\right) q_j\left(\frac{x}{z}, Q^2\right) , \tag{1}$$

whose kernel elements $P_{ij}(z,Q^2)$ are known as splitting functions, since they describe the splitting of a parton of kind j into a parton of kind i carrying a fraction z of the longitudinal momentum of j. The parton densities themselves $q_i(x,Q^2)$ are essentially non-perturbative, since they depend on physics at hadronic mass scales $\lesssim 1$ GeV, where the QCD coupling is large. On the other hand the splitting functions are given by a perturbative expansion in the QCD coupling $\alpha_s(Q^2)$. Thus given partial experimental information on the parton densities¹ — for example over a limited range of Q, or for only a subset of parton flavours

¹Of course it is not the parton densities, but rather structure functions, which can be derived from them perturbatively, that are measured experimentally.

— the DGLAP equations can be used to reconstruct the parton densities over the full range of Q and for all flavours.

The pivotal role played by the DGLAP equation has motivated a considerable body of literature discussing its numerical solution [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]. There exist two main classes of approaches: those that solve the equation directly in x-space and those that solve it for Mellin transforms of the parton densities, defined as

$$q_N(N,Q^2) = \int_0^1 dx x^N q_i(x,Q^2) ,$$
 (2)

and subsequently invert the transform back to x-space. Recently, a novel approach has been proposed which combines advantages of the N-space and x-space methods [8]. N-space based methods are of interest because the Mellin transform converts the convolution of eq. (1) into a multiplication, resulting in a continuum of independent matrix differential (rather than integro-differential) equations, one for each value of N, making the evolution more efficient numerically.

The drawback of the Mellin method is that one needs to know the Mellin transforms of both the splitting functions and the initial conditions. There can also be subtleties associated with the inverse Mellin transform. The x-space method is in contrast more flexible, since the inputs are only required in x-space; however it is generally considered to less efficient numerically, because of the need to carry out the convolution in eq. (1).

To understand the question of efficiencies one should analyse the number of operations needed to carry out the evolution. Assuming that one needs to establish the results of the evolution at N_x values of x, and N_Q values of Q, one essentially needs $\mathcal{O}\left(N_x^2N_Q\right)$ operations with an x-space method, where the N_x^2 factor comes from the convolutions. In the Mellin-space method, one needs $\mathcal{O}\left(N_xN_QM\right)$ operations, where M is the number of points used for Mellin inversion. One source of drawback of the x-space method is that, nearly always, $N_x \sim \ln 1/x_{\min}$ and so the method scales as the square of $\ln 1/x_{\min}$, where the Mellin method is linear (and M can be kept roughly independent of x_{\min}).

The other issue relates to how one goes to higher numerical integration and interpolation orders. In x-space methods one tends to choose x values that are uniformly distributed (be it in $\ln 1/x$ or some other more complex function) — this limits one to higher-order extensions of the Trapezium and Simpson-rule type integrations, whose order in general is n_p-1 where n_p is the number of points used for the integration. The precision of the integration is given by $(\delta x)^{n_p}$ where δx is the grid spacing. Higher n_p improves the accuracy, but typically n_p can not be taken too large because of large cancellations between weights that arise for large n_p . In the Mellin method one is free to position the M points as one likes, and one can then use Gaussian type integration [5, 3, 9]; using n_p points one manages to get a numerical order $2n_p-1$, i.e. accuracy $(\delta x)^{2n_p}$, and furthermore the integration weights do not suffer from cancellations at large n_p , allowing one to increase n_p , and thus the accuracy, quite considerably.

Despite it being more difficult to obtain high accuracy with x-space methods, their greater flexibility means that they are widespread, serving as the basis of the well-known QCDNUM program [1], and used also by the CTEQ [12] and MRST/MRSW [13] global

fitting collaborations. Higher-order methods in x-space have been developed in [2, 4, 6, 7, 14], and more recently have been incorporated also in QCDNUM.

HOPPET, the program presented here, uses higher-order methods both for the x-integrations and Q evolution. It combines this with multiple grids in x-space: a high-density grid at large x where it is hardest to obtain good accuracy, and coarser grids at smaller x where the smoothness of the PDFs facilitates the integrations. One of the other crucial features of the program is that it pre-calculates as much information as possible, so as to reduce the evolution of a new PDF initial condition to a modest set of addition and multiplication operations. Additionally, the program provides access to a range of low and medium-level operations on PDFs which should allow a user to extend the facilities already provided.

The functionality described in this article has been present in HOPPET's predecessors for several years (they were available on request), but had never been documented. Those predecessors have been used in a number of different contexts, like resummation of event shapes in DIS [14], automated resummation of event shapes [15], studies of resummation in the small-x limit [16], and in a posteriori inclusion of PDFs in NLO final-state calculations [17, 18], as well as used for benchmark comparisons with Pegasus [3] in [19]. Since the code had not hitherto been released in a documented form, it is the authors' hope that availability of this documentation may make the package somewhat more useful.

This manual is structured as follows: Sect. 2 briefly summarises the perturbative QCD ingredients contained in HOPPET, while Sect. 3 describes the numerical techniques used to solve the DGLAP equation. Sects. 4-7 present in detail the capabilities of the HOPPET package with its general F95 interface, with emphasis on those aspects that can be adapted by a user to tailor it to their own needs. Sect. 8 describes a streamlined interface to HOPPET which embodies its essential capabilities in a simple interface available a variety of programming languages: F77 and C/C++. Finally, Sect. 9 presents a detailed quantitative study of the performance of HOPPET, and in the final section we conclude. A set of appendices contain various example programs, both for the general and the streamlined interfaces, a reference guide with the most important HOPPET modules, details on technical aspects and a set of useful tips on Fortran 95.

A reader whose interest is to use HOPPET to perform fast and efficient evolution of PDFs may wish to skip Sects. 4 to 7 and move directly to Sect. 8, which describes the user-friendlier streamlined interface, accessible from F95, F77 and C/C++, and which contains the essential functionalities of HOPPET. He/she is also encouraged to go through the various example programs which contain detailed descriptions and explanations. On the other hand, a reader interested in the more flexible and general functionalities of HOPPET, should also consult Sects. 4 to 7.

Note that throughout this documentation, a PDF refers always to a momentum density rather than a parton density, that is, when we refer to a gluon, we mean xg(x) rather than g(x), the same convention as used in the LHAPDF PDF library [20].

2 Perturbative evolution in QCD

First of all we set up the notation and conventions that are used through HOPPET. The DGLAP equation for a non-singlet parton distribution reads

$$\frac{\partial q(x,Q^2)}{\partial \ln Q^2} = \frac{\alpha_s(Q^2)}{2\pi} \int_x^1 \frac{dz}{z} P(z,\alpha_s(Q^2)) q\left(\frac{x}{z},Q^2\right) \equiv \frac{\alpha_s(Q^2)}{2\pi} P(x,\alpha_s(Q^2)) \otimes q\left(x,Q^2\right) . \tag{3}$$

Note that the related variable $t \equiv \ln Q^2$ is also used through HOPPET. The splitting functions in eq. (3) are known up to NNLO in the unpolarised case [21, 22]:

$$P(z, \alpha_s(Q^2)) = P^{(0)}(z) + \frac{\alpha_s(Q^2)}{2\pi} P^{(1)}(z) + \left(\frac{\alpha_s(Q^2)}{2\pi}\right)^2 P^{(2)}(z) , \qquad (4)$$

and up to NLO in the polarised case. The generalisation to the singlet case is straightforward, as it is the generalisation of eq. (3) to the case of time-like evolution², relevant for example for fragmentation function analysis, where partial NNLO results are also available [24].

As with the splitting functions, all perturbative quantities in HOPPET are defined to be a coefficient of $\alpha_s/2\pi$. The one exception is the β -function coefficients of the running coupling equation:

$$\frac{d\alpha_s}{d\ln Q^2} = \beta \left(\alpha_s \left(Q^2\right)\right) = -\alpha_s (\beta_0 \alpha_s + \beta_1 \alpha_s^2 + \beta_2 \alpha_s^3) . \tag{5}$$

The evolution of the strong coupling and the parton distributions can be performed in both the fixed flavour-number scheme (FFNS) and the variable flavour-number scheme (VFNS). In the VFNS case we need the matching conditions between the effective theories with n_f and $n_f + 1$ light flavours for both the strong coupling $\alpha_s(Q^2)$ and the parton distributions at the heavy quark mass threshold m_h^2 .

These matching conditions for the parton distributions receive non-trivial contributions beginning at NNLO. For light quarks $q_{l,i}$ of flavour i (quarks that are considered massless below the heavy quark mass threshold m_h^2) the matching between their values in the n_f and $n_f + 1$ effective theories reads:

$$q_{l,i}^{(n_f+1)}(x,m_h^2) = q_{l,i}^{(n_f)}(x,m_h^2) + \left(\frac{\alpha_s(m_h^2)}{2\pi}\right)^2 A_{qq,h}^{\text{ns},(2)}(x) \otimes q_{l,i}^{(n_f)}(x,m_h^2) , \qquad (6)$$

where $i = 1, ..., n_f$, while for the gluon distribution and the heavy quark PDF q_h one has

² The general structure of the relation between space-like and time-like evolution and splitting functions has been investigated in [23, 24, 25, 26, 27].

a coupled matching condition:

$$g^{(n_f+1)}(x, m_h^2) = g^{(n_f)}(x, m_h^2)$$

$$+ \left(\frac{\alpha_s(m_h^2)}{2\pi}\right)^2 \left[A_{\text{gq,h}}^{S,(2)}(x) \otimes \Sigma^{(n_f)}(x, m_h^2) + A_{\text{gg,h}}^{S,(2)}(x) \otimes g^{(n_f)}(x, m_h^2)\right],$$

$$(q_h + \bar{q}_h)^{(n_f+1)}(x, m_h^2) = \left(\frac{\alpha_s(m_h^2)}{2\pi}\right)^2 \left[\tilde{A}_{\text{hq}}^{S,(2)}(x) \otimes \Sigma^{(n_f)}(x, m_h^2) + \tilde{A}_{\text{hg}}^{S,(2)}(x) \otimes g^{(n_f)}(x, m_h^2)\right],$$

with $q_h = \bar{q}_h$, and the singlet PDF $\Sigma(x,Q^2)$ is defined in Table 1. The NNLO matching coefficients were computed in [28]³. Notice that the above conditions will lead to small discontinuities of the PDFs in its evolution in Q^2 , which are cancelled by similar matching terms in the coefficient functions resulting in continuous physical observables. In particular, the heavy quark PDFs start from a non-zero value at threshold at NNLO, which sometimes can even be negative.

The corresponding NNLO relation for the matching of the coupling constant at the heavy quark threshold m_h^2 is given by

$$\alpha_s^{(n_f+1)}(m_h^2) = \alpha_s^{(n_f)}(m_h^2) + C_2 \left(\frac{\alpha_s^{(n_f)}(m_h^2)}{2\pi}\right)^3$$
, (8)

where the matching coefficient C_2 was computed in [29].

The default basis for the PDFs, called the human representation in HOPPET, is such that the entries in an array pdf(-6:6) of PDFs correspond to:

$$\bar{t} = -6, \bar{b} = -5, \bar{c} = -4, \bar{s} = -3, \bar{u} = -2, \bar{d} = -1,$$

$$g = 0,$$

$$d = 1, u = 2, s = 3, c = 4, b = 5, t = 6.$$
(9)

This representation is the same as that used through the LHAPDF library [20]. However, this representation leads to a complicated form of the evolution equations. The splitting matrix can be simplified considerably (made diagonal except for a 2×2 singlet block) by switching to a different flavour representation, which is named the evln representation, for the PDF set, as explained in detail in [30, 31]. This representation is described in Table 1.

In the evln basis, the gluon evolves coupled to the singlet PDF Σ , and all non-singlet PDFs evolve independently. Notice that the representations of the PDFs are preserved under linear operations, so in particular they are preserved under DGLAP evolution. The conversion from the human to the evln representations of PDFs requires that the number of active quark flavours n_f is specified by the user, as described in Sect. 5.1.2.

In HOPPET unpolarised DGLAP evolution is available up to NNLO in the MS scheme, while for the DIS scheme only evolution up to NLO is available. For polarised evolution only the $\overline{\rm MS}$ scheme is available. The variable factscheme takes different values for each factorisation scheme:

 $^{^3}$ The authors are thanked for the code corresponding to the calculation.

i	name	q_i
$-6\ldots-(n_f+1)$	q_i	q_i
$-n_f \ldots -2$	$q_{\mathrm{NS},i}^-$	$(q_i - \bar{q}_i) - (q_1 - \bar{q}_1)$
-1	$q_{ m NS}^{V^{'}}$	$\sum_{j=1}^{n_f} (q_j - \bar{q}_j)$
0	g	gluon
1	\sum	$\sum_{j=1}^{n_f} (q_j + \bar{q}_j)$
$2 \dots n_f$	$q_{\mathrm{NS},i}^+$	$(q_i + \bar{q}_i) - (q_1 + \bar{q}_1)$
$(n_f+1)\dots 6$	q_i	q_i

Table 1:

The evolution representation (called evln in HOPPET) of PDFs with n_f active quark flavours in terms of the human representation.

factscheme	Evolution
1	unpolarised MS scheme
2	unpolarised DIS scheme
3	polarised $\overline{\rm MS}$ scheme

Note that mass thresholds are currently missing in the DIS scheme.

3 Numerical techniques

We briefly introduce now the numerical techniques used to perform parton evolution: the discretisation of PDFs and their convolutions with splitting functions on a grid in x, and the subsequent DGLAP evolution in Q^2 .

The first aspect that we discuss is how to represent PDFs and associated convolutions in terms of an interpolating grid in x-space. Note that this technique can be applied to any quantity that appears through convolutions, so it is not restricted to parton distributions. Then we will describe how to obtain the solution of the DGLAP evolution equations.

3.1 Higher order matrix representation

Given a set of N_x grid points $y_{\alpha} = \ln 1/x_{\alpha}$, labelled by an index α and (for later convenience) a uniform grid spacing, $y_{\alpha} = \alpha \delta y$, one can approximate a parton distribution function xq(x,t) by interpolating the PDF at the grid points,⁴

$$xq(y = \ln 1/x, t) = \sum_{\alpha} w_{\alpha}(y)q_{\alpha}(t), \qquad (10)$$

⁴From the numerical point of view, it is advantageous to interpolate xq rather than q itself because the is in general smoother.

where $w_{\alpha}(y)$ are the interpolation weights, we have defined

$$q_{\alpha}(t) \equiv x_{\alpha}q(y_{\alpha}, t) , \qquad (11)$$

and the sum over α runs over n+1 points in the vicinity of y for an interpolation order n. Note that Greek indices represent the y dimension, while Roman indices are used to represent the flavour dimension.

The convolution of a single-flavour PDF with a splitting function P(z,t) can be written as

$$(P \otimes q)(y,t) = \sum_{\alpha} \omega_{\alpha}(y)(P \otimes q)_{\alpha}(t) , \qquad (12)$$

where we have replaced the convolution by its grid representation.

$$(P \otimes q)_{\alpha}(t) = \sum_{\beta} P_{\alpha\beta}(t) \, q_{\beta}(t) \,, \tag{13}$$

where β runs over $\mathcal{O}(N_x)$ points of the grid and we have defined

$$P_{\alpha\beta}(t) = \int_{e^{-y_{\alpha}}}^{1} dz \, P(z, t) \, w_{\beta}(y_{\alpha} + \ln z) . \qquad (14)$$

Note that the piecewise interpolating polynomials that we use are not smooth at the grid points. The reason for this is that this type of interpolation strategy is much more suited for the numerical integration required in convolutions than other strategies which impose continuity on the interpolating polynomials, like for example splines, which are in general slower and less accurate for the same number of grid points.

A virtue of having a uniform grid in $y = \ln 1/x$ is that the interpolation functions can be arranged to have a structure $w_{\beta}(y) = w_{\beta}(y - y_{\beta})$, so that $P_{\alpha\beta}$ just depends on $\alpha - \beta$, and can be rewritten $\mathcal{P}_{\alpha-\beta}$. A slight subtlety arises at large x, where if one writes $w_{\beta}(y) = w_{\beta}(y - y_{\beta})$ one is effectively assuming an interpolation that uses identically zero interpolation points for $x \geq 1$ [6, 10], even though xq(x) is not formally defined for x > 1. In practice this is often not too important (because PDFs drop rapidly towards x = 1), but we shall include two options: one that uses effective zero-points beyond x = 1 and one that ensures that the interpolation is based only on the physically valid domain of the PDFs.

These two choices are represented in Fig. 1. For an interpolation of order n (that is, which uses information from n+1 grid points), the option of using only points with $x \leq 1$ is denoted by order = n. This has the consequence that for $\beta \leq n$ we cannot write $P_{\alpha\beta} = \mathcal{P}_{\alpha-\beta}$, and so must explicitly store $\mathcal{O}(N_x n)$ distinct $P_{\alpha\beta}$ entries. The option of using artificial (zero-valued) points at x > 1 is denoted by order = -n, and does allow us to write $P_{\alpha\beta} = \mathcal{P}_{\alpha-\beta}$ (thus we store only $\mathcal{O}(N_x)$ entries), with $\mathcal{P}_{\alpha-\beta} = 0$ for $\alpha < \beta$.

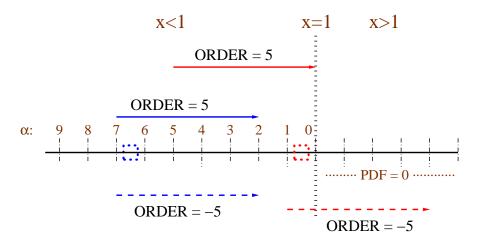


Figure 1: The different strategies (+ve and -ve order) for interpolation of the grid near x = 1. The dotted (blue, red) boxes indicate two regions in which we illustrate the interpolation of the PDF, while the (blue, red) lines with arrows indicate the corresponding range of grid points on which the interpolation is based.

3.2 Evolution operators

The DGLAP evolution equation, eq. (3), is easily approximated in terms of its grid representation by

$$\frac{\partial q_{\alpha}(t)}{\partial t} = \frac{\alpha_s(t)}{2\pi} \sum_{\beta} P_{\alpha\beta}(t) q_{\beta}(t) , \qquad (15)$$

where for a general value of α the sum over β extends over $\mathcal{O}(\alpha + |\mathbf{order}|)$ points of the grid. Introducing $M_{\alpha\beta}(t_0) = \delta_{\alpha\beta}$ as initial condition at some initial scale t_0 , one can alternatively solve

$$\frac{\partial M_{\alpha\beta}(t)}{\partial t} = \frac{\alpha_s(t)}{2\pi} \sum_{\gamma} P_{\alpha\gamma}(t) M_{\gamma\beta}(t) . \tag{16}$$

Then the evolved parton distribution at the grid points is given by

$$q_{\alpha}(t) = \sum_{\beta} M_{\alpha\beta}(t) q_{\beta}(t_0) . \tag{17}$$

We refer to $M_{\alpha\beta}(t)$ as the evolution operator. From a practical point of view, we will solve eqs. (15) and (16) with higher order iterative Runge-Kutta methods, as described in Sect. 6.2.1.

A further simplification occurs if one can rewrite the splitting functions P as a translation invariant object. Using the properties discussed in the previous subsection, we can rewrite $P_{\alpha\beta} = \mathcal{P}_{\alpha-\beta}$, and then similarly one can rewrite $M_{\alpha\beta} = \mathcal{M}_{\alpha-\beta}$, and it is as simple to determine $M_{\alpha\beta}(t)$ as it is to determine the evolution of a single vector q_{α} , i.e. one just evolves a single column, $\beta = 0$, of $M_{\alpha\beta}(t)$.

4 Single-flavour grids and convolutions

HOPPET is written in Fortran 95 (F95). This has considerable advantages compared to F77, as will be seen in the discussion of the program, though it does lack a number of fully object-oriented features and this sometimes restricts the scope for expressiveness. Fortran 95 perhaps not being the best known language in the high-energy physics community, occasionally some indications will be give to help the reader with less-known language constructs, with further information in Appendix E.

All routines described in this section need access to the convolution module, which can either be obtained directly by adding a

```
use convolution
```

statement at the beginning of the relevant subprogram (before any implicit none or similar declarations). Alternatively, as with the rest of the routines described in this documentation, it can be accessed indirectly through the hoppet_v1 module

```
use hoppet_v1
```

Unless you are delving into the innards of HOPPET, the latter is more convenient since it provides access to everything you are likely to need.

4.1 Grid definitions (grid_def)

The grid (in y) is the central element of the PDF evolution. Information concerning the grid is stored in a derived type $grid_def$:

```
type(grid_def) :: grid
call InitGridDef(grid,dy=0.1_dp,ymax=10.0_dp,order=5)
```

This initialises a grid between x=1 and down to $x=e^{-ymax}$, with uniform grid spacing in $y=\ln 1/x$ of dy=0.1, with a grid which uses order 5 interpolation with only $x\leq 1$ points. The user can modify this choice to better suit his/her particular needs, as explained in Sect. 3.1. One notes the use of keyword arguments — the keywords are not mandatory in this case, but have been included to improve the legibility. Having defined a grid, the user need not worry about the details of the grid representation.

In line with the convention set out in the Fortran 90 edition of Numerical Recipes [32] we shall use _dp to indicate that numbers are in double precision, and real(dp) to declare double precision variables. The integer parameter dp is defined in the module types (and available indirectly through module hoppet_v1).

It is often useful to have multiple grids, with coarser coverage at small x and finer coverage at high x, to improve the precision the convolution⁵ at large-x without introducing an unnecessarily large density of points at small-x. To support this option, we can first define an array of sub-grids, and then use them to initialise a combined grid as follows:

$$\lim_{x \to 1} q(x, Q^2) \sim (1 - x)^m , \qquad (18)$$

 $^{^{5}}$ The reason that denser grids are required at large-x is that if a typical parton distributions goes as

When combining them, the locked=.true. option has been specified, which ensures that after any convolution, information from the finer grids is propagated into the coarser ones. This places some requirements on the grid spacings, notably that a coarse grid have a spacing that is a multiple of that of the next finest grid. If the requirements are not satisfied by the subgrids that have been provided, then new similar, but more suitable subgrids are automatically generated.

Note that the two kinds of invocation of InitGridDef actually correspond to different (overloaded) subroutines. The Fortran 95 compiler automatically selects the correct one on the basis of the types of arguments passed.

Though only grids that are uniform in y have been implemented (and the option of a simultaneous combination of them), nearly all of the description that follows and all code outside the **convolution** module are independent of this detail, the only exception being certain statements about timings. Therefore were there to be a strong motivation for an alternative, non-uniform grid, it would suffice to modify the **convolution** module, while the rest of the library (and its interfaces) would remain unchanged.

4.2 x-space functions

Normal x-space functions (such as PDFs) are held in double precision arrays, which are to be allocated as follows

```
real(dp), pointer :: xgluon(:)
call AllocGridQuant(grid,xgluon)
```

Note that for this to work, xgluon(:) should be a pointer, and not just have the allocatable attribute. To deallocate a grid quantity, one may safely use the F95 deallocate command.

Since xgluon(:) is just an array, it carries no information about the grid. Therefore to set and access its value, one must always provide the information about the grid. This is not entirely satisfactory, and is one of the drawbacks of the use of F95.

then its logarithmic derivative with respect to x is divergent,

$$\lim_{x \to 1} \frac{\partial \ln q(x, Q^2)}{\partial \ln x} = \lim_{x \to 1} \frac{-mx}{1 - x} \to -\infty , \qquad (19)$$

and therefore to maintain the relative accuracy of the evolution, grids with denser coverage at large-x are required.

There are a number of ways of setting a grid quantity. Suppose for example that we have a function

which returns the gluon momentum density xg(x) (cf. Sect. 3.1). Then we can call

```
call InitGridQuant(grid,xgluon,example_xgluon)
```

to initialise **xgluon** with a representation of the return value from the function **example_xgluon**. Alternative methods for initialising grid quantities are described in Appendix C.

To then access the gluon at a given value of $y = \ln 1/x$, one proceeds as follows

```
real(dp) :: y, xgluon_at_y
...
y = 5.0_dp
xgluon_at_y = EvalGridQuant(grid,xgluon,y) !! again this returns xg(x)
```

Note that again we have to supply the grid argument to EvalGridQuant because the xgluon array itself carries no information about the grid (other than its size).

A less efficient, but perhaps more 'object-oriented' way of accessing the gluon is via the notation

```
xgluon_at_y = xgluon .aty. (y.with.grid)
```

There also exists an .atx. operator for evaluating the PDF at a given x value. Many of these procedures and operators are overloaded so as to work with higher-dimensional arrays of grid quantities, for example a multi-flavour PDF array pdf(:,:). The first index will always correspond to the representation on the grid, while the second index would here indicate the flavour.

Note that arithmetic operators all have higher precedence than library-defined operators such as .aty.; accordingly some ways of writing things are more efficient than others:

```
xgluon_at_y_times_2 = 2 * xgluon .aty. (y.with.grid) ! very inefficient
xgluon_at_y_times_2 = 2 * (xgluon .aty. (y.with.grid)) ! fairly efficient
xgluon_at_y_times_2 = 2 * EvalGridQuant(grid,xgluon,y) ! most efficient
```

In the first case the whole of the array xgluon is multiplied by 2, and then the result is evaluated at y, whereas in the second and third cases only the result of the gluon at y is multiplied by 2.

4.3 Grid convolution operators

While it is relatively straightforward internally to represent a grid-quantity (e.g. a PDF) as an array, for convolution operators it is generally useful to have certain extra information.

Accordingly a derived type has been defined to hold a convolution operator, and routines are provided for allocation and initialisation of splitting functions. The following example describes how the gg LO splitting function would be used to initialise the corresponding convolution operator:

```
type(grid_conv) :: xPgg
call AllocGridConv(grid,xPgg)
call InitGridConv(grid,xPgg, xPgg_func)
```

where the P_{gg} splitting function is provided in the form of the function xPgg_func. Note that this function must return $xP_{gg}(x)$:

```
! returns various components of exp(-y) P_gg (exp(-y))
real(dp) function xPgg_func(y)
 use types
 use convolution_communicator ! provides cc_piece, and cc_REAL,...
                             ! provides CA, TR, nf, ...
 implicit none
 real(dp), intent(in) :: y
 real(dp)
 x = exp(-y); xPgg_func = zero
  if (cc_piece == cc_DELTA) then
                                 ! Delta function term
     xPgg_func = (11*CA - 4*nf*TR)/6.0_dp
 else
     if (cc_piece == cc_REAL .or. cc_piece == cc_REALVIRT) &
        & xPgg_func = 2*CA*(x/(one-x) + (one-x)/x + x*(one-x))
     if (cc_piece == cc_VIRT .or. cc_piece == cc_REALVIRT) &
        & xPgg_func = xPgg_func - 2*CA*one/(one-x)
     xPgg_func = xPgg_func * x ! remember to return x * Pgg
  end if
end function xPgg_func
```

To address the issue that convolution operators can involve plus-distributions and delta functions, the module convolution_communicator contains a variable cc_piece which indicates which part of the splitting function is to be returned — the real, virtual, real + virtual, or δ -function pieces.

The initialisation of a grid_conv object uses an adaptive Gaussian integrator (a variant of CERNLIB's dgauss) to calculate the convolution of the splitting function with trial weight functions. The default accuracy for these integrations is 10^{-7} . It can be modified to value eps with the following subroutine call

```
call SetDefaultConvolutionEps(eps)
```

which is to be made before creating the grid_def object. Alternatively, an optional eps argument can be included in the call to InitGridDef as follows:

```
type(grid_def) :: grid
real(dp) :: eps
[ ... set eps ... ]
call InitGridDef(grid,dy=0.1_dp,ymax=10.0_dp,order=3,eps)
```

Note that eps is just one of the parameters affecting the final accuracy of convolutions. In practice (unless going to extremely high accuracies) the grid spacing and interpolation scheme are more critical.

Having allocated and initialised a xPgg splitting function, we can go on to use it. For example:

```
real(dp), pointer :: xPgg_x_xgluon(:)
...
call AllocGridQuant(grid,xPgg_x_xgluon) !! Allocate memory for result of convolution
xPgg_x_xgluon = xPgg .conv. xgluon !! Convolution of xPgg with xgluon
```

Since the return value of xPgg .conv. xgluon is just an F95 array, one can also write more complex expressions. Supposing we had defined also a xPgq splitting function and a singlet quark distribution xquark, as well as as2pi = $\alpha_s/2\pi$, then to first order in α_s we could write the gluon evolution through a step dt in $\ln Q^2$ as

```
xgluon = xgluon + (as2pi*dt) * ((xPgg .conv. xgluon) + (xPgq .conv. xquark))
```

Note that like .aty., .conv. has a low precedence, so the use of brackets is important to ensure that the above expressions are sensible. Alternatively, the issues of precedence can be addressed by using * (also defined as convolution when it appears between a splitting function and a PDF) instead of .conv.:

```
xgluon = xgluon + (as2pi*dt) * (xPgg*xgluon + xPgq*xquark)
```

Note that, for brevity, from now on we will drop the explicit use of x in front of names PDF and convolution operator variables.

4.3.1 Other operations on grid_conv objects

It is marginally less transparent to manipulate grid_conv types than PDF distributions, but still fairly simple:

```
call AllocGridConv(grid,Pab)
                                     ! Pab memory allocated
                                                           (opt.alloc)
call InitGridConv(grid,Pab)
                                     ! Pab = 0
call InitGridConv(Pab,Pcd[,factor])  ! Pab = Pcd [*factor] (opt.alloc)
call InitGridConv(grid,Pab,function) ! Pab = function
                                                           (opt.alloc)
call SetToZero(Pab)
                                     ! Pab = 0
call Multiply (Pab, factor)
                                     ! Pab = Pab * factor
call AddWithCoeff(Pab,Pcd[,coeff])
                                     ! Pab = Pab + Pcd [*coeff]
call AddWithCoeff(Pab,function)
                                     ! Pab = Pab + function
call SetToConvolution(Pab,Pac,Pcb)
                                     ! Pab = Pac.conv.Pcb (opt.alloc)
call SetToConvolution(P(:,:),Pa(:,:),Pb(:,:))
                                                         ! (opt.alloc)
                                     ! P(:,:) = matmul(Pa(:,:),Pb(:,:))
call SetToCommutator(P(:,:),Pa(:,:),Pb(:,:))
                                                         ! (opt.alloc)
                                     ! P(:,:) = matmul(Pa(:,:),Pb(:,:))
                                               -matmul(Pb(:,:),Pa(:,:))
call Delete(Pab)
                                     ! Pab memory freed
```

Routines labelled "(opt.alloc.)" allocate the memory for the grid_conv object if the memory has not already been allocated. (If it has already been allocated it is assumed to correspond to the same grid as any other grid_conv objects in the same subroutine call). Some calls require that one specify the grid definition being used (grid), because otherwise there is no way for the subroutine to deduce which grid is being used.

If repeatedly creating a grid_conv object for temporary use, it is important to remember to Delete it afterwards, so as to avoid memory leaks.

Nearly all the routines are partially overloaded so as to be able to deal with one and twodimensional arrays of grid_conv objects as well. The exceptions are those that initialise the grid_conv object from a function (arrays of functions do not exist), as well as the convolution routines (for which the extension to arrays might be considered non-obvious) and the commutation routine which only has sense for matrices of grid_conv objects.

4.3.2 Derived grid_conv objects

Sometimes it can be cumbersome to manipulate the <code>grid_conv</code> objects directly, for example when trying to create a <code>grid_conv</code> that represents not a fixed order splitting function, but the resummed evolution from one scale to another. For such situations the following approach can be used

Here GetDerivedProbes allocates and sets up an array of probe parton distributions. Since a single-flavour parton distribution is a one-dimensional array of real(dp), the array of probes is a two-dimensional array of real(dp), the second dimension corresponding to the index of the probe. One then carries out whatever operations one wishes on each of the probes. Finally with the call to SetDerivedConv, one can reconstruct a grid_conv object that corresponds to the set of operations just carried out

Some comments about memory allocation: the probes are automatically allocated and deallocated; in contrast the call to SetDerivedConv(Presult,probes) knows nothing about the grid, so Presult must have been explicitly allocated for a specific grid beforehand.

A note of caution: when one's grid is made of nested subgrids with the locking option set to .true., after a convolution of a grid_def object with a parton distribution, the coarser grids for the parton distribution are supplemented with more accurate information from the finer grids. When carrying out multiple convolutions, this happens after each convolution. There is no way to emulate this with a single grid_def object, and the locking

would actually confuse the reconstruction of resulting <code>grid_def</code> object. So when the user requests the probes, locking is temporarily turned off globally and then reestablished after the derived <code>grid_object</code> has been constructed. Among other things this means that acting with a derived <code>grid_object</code> will not be fully equivalent to carrying out the individual operations separately. In particular the accuracy may be slightly lower (whatever is lost due to the absence of intermediate locking).

5 Multi-flavour grids and convolutions

The discussion in the previous section about how to represent functions and associated convolutions in a general x—space grid holds for any kind of problem involving convolutions, even if the examples were given in the context of DGLAP evolution. In this section we shall examine the tools made available specifically to address the DGLAP evolution problem.

5.1 Full-flavour PDFs and flavour representations

The routines described in this section are available from the pdf_general and pdf_representation modules, or via the hoppet_v1 general module.

Full flavour PDFs sets are just like single flavour PDFs except that they have an extra dimension. They are represented by arrays, and if you want HOPPET to deal with allocation for you, they should be pointer arrays. One can allocate a single PDF (two dimensional real(dp) array) or an array of PDFs (three-dimensional real(dp) array)

```
real(dp), pointer :: PDF(:,:), PDFarray(:,:,:)
call AllocPDF(grid,PDF)     ! allocates PDF(0:,-6:7)
call AllocPDF(grid,PDFarray,0,10)   ! allocates PDFarray(0:,-6:7,0:10)
```

The first dimension corresponds to the grid in y; the second dimension corresponds to the flavour index. Its lower bound is -6, as one would expect.

What takes a bit more getting used to is that its upper bound is 7. The reason is as follows: the flavour information can be represented in different ways, for example each flavour separately, or alternatively as singlet and non-singlet combinations. In practice both are used inside the program and it is useful for a PDF distribution to have information about the representation, and this is stored in PDF(:,7)⁶.

5.1.1 Human representation.

When a PDF is allocated it is automatically labelled as being in the human representation, described in Sect. 2. Constants with names like iflv_bbar, iflv_g, iflv_b, are defined in module pdf_representation, to facilitate symbolic access to the different flavours.

⁶ In the current release of HOPPET, in particular, for PDFs in the human representation one has PDF(:,7)=0, while for PDFs in the evln representation, the information on the active number of flavours is encoded as nf = (abs(q(2,7))+abs(q(3,7)))/(abs(q(0,7))+abs(q(1,7))), so that it is conserved under linear combinations.

However this feature might be modified in future versions of the program.

If you are creating a PDF as an automatic array (one whose bounds are decided not by the allocation routine, but on the fly), for example in a function that returns a PDF, then you should label it yourself as being in the human representation, either with the LabelPdfAsHuman(pdf) subroutine call, or by setting pdf(:,7) to zero:

```
module pdf_initial_condition
  use hoppet_v1; implicit none
contains
  function unpolarized_dummy_pdf(xvals) result(pdf)
    real(dp), intent(in) :: xvals(:)
                        :: pdf(size(xvals),-6:7)
   real(dp)
    ! clean method for labelling as PDF as being in the human representation
    call LabelPdfAsHuman(pdf)
    ! Alternatively, by setting everything to zero
    ! (notably pdf(:,7)), the PDF representation
    ! is automatically set to be human
   pdf(:,:) = 0
   ! iflv_g is pre-defined integer parameter (=0) for symbolic ref. to gluon
   pdf(:,iflv_g) = 1.7_dp * xvals**(-0.1_dp) * (1-xvals)**5 ! Returns x*g(x)
    [... set other flavours here ...]
  end function unpolarized_dummy_pdf
end module pdf_initial_condition
```

The function has been placed in a module so as to provide an easy way for a calling routine to have access to its interface (this is needed for the dimension of xvals to be correctly passed). Writing a function such as that above is probably the easiest way of initialising a PDF:

```
use hoppet_v1; use pdf_initial_condition; implicit none
type(grid_def) :: grid
real(dp), pointer :: pdf(:,:)
[...]
call AllocPDF(grid,pdf)
pdf = unpolarized_dummy_pdf(xValues(grid))
```

There exist a number of other options, which can be found by browsing through src/pdf_general.f90. Of these a sometimes handy one is

```
call AllocPDF(grid,pdf)
call InitPDF_LHAPDF(grid, pdf, LHAsub, Q)
```

where LHAsub is the name of a subroutine with the same interface as LHAPDF's evolvePDF [20]:

```
subroutine LHAsub(x,Q,res)
  use types; implicit none
  real(dp), intent(in) :: x,Q
  real(dp), intent(out) :: res(-6:6) ! on output contains flavours -6:6 at x,Q
  [...] ! Note that it should return momentum densities
end subroutine LHAsub
```

Note that LHAsub should return momentum densities, as happens with the LHAPDF routines [20].

Having initialised a PDF, to then extract it at a given y value, one can either examine a particular flavour using the methods described in Sect. 4.2

```
real(dp) :: y, gluon_at_y
gluon_at_y = pdf(:,iflv_g) .aty. (y.with.grid)
! OR
gluon_at_y = EvalGridQuant(grid,pdf(:,iflv_g),y)
or one can extract all flavours simultaneously
real(dp) :: pdf_at_y(-6:6)
pdf_at_y = pdf(:,-6:6) .aty. (y.with.grid)
! OR
pdf_at_y = EvalGridQuant(grid,pdf(:,-6:6),y)
```

with the latter being more efficient if one needs to extract all flavours simultaneously. Note that here we have explicitly specified the flavours, -6:6, that we want.⁷

5.1.2 Evolution representation

For the purpose of carrying out convolutions, the human representation is not very advantageous because the splitting matrix in flavour space is quite complicated. Accordingly HOPPET uses a different representation of the flavour internally when carrying out convolution of splitting matrices with PDFs. For most purposes the user need not be aware of this. The two exceptions are when a user plans to create derived splitting matrices (being careless about the flavour representation will lead to mistakes) or wishes to carry out repeated convolutions for a fixed n_f value (appropriate manual changes of the flavour representation can speed things up).

The splitting matrix can be simplified considerably by switching to a different flavour representation, as can be seen in Table 1. When carrying out a convolution, the only non-diagonal part is the block containing indices 0, 1. This representation is referred to as the evln representation. Whereas the human representation is n_f -independent the evln depends on n_f through the Σ and q_{NS}^V entries and the fact that flavours beyond n_f are left in the human representation (since they are inactive for evolution with n_f flavours).

To take a PDF in the human representation and make a copy in an evln representation, one uses the CopyHumanPdfToEvln routine

```
real(dp), pointer :: pdf_human(:,:), pdf_evln(:,:)
integer :: nf_lcl ! NB: nf would conflict with global variable
[... setting up pdf_human, nf_lcl, etc. ...]
call AllocPDF(grid,pdf_evln) ! or it might be an automatic array
call CopyHumanPdfToEvln(nf_lcl, pdf_human, pdf_evln) ! From human to evolution representation
```

where one specifies the n_f value for the evln representation. One can go in the opposite direction with

⁷If instead we had said pdf(:,:) the result would have corresponded to a slice of flavours -6:7, i.e. including an interpolation of the representation labelling information, which would be meaningless.

```
call CopyEvlnPdfToHuman(nf_lcl, pdf_evln, pdf_human)
```

At any time one can check which is the representation of a given PDF using the GetPdfRep function,

```
integer nf_rep
real(dp), pointer :: pdf(:,:)
[... set up pdf, ...]
nf_rep = GetPdfRep(pdf)
```

which returns the number of active flavours if the PDF is in the evln representation, or a negative integer if the PDF is in the human representation.

5.2 Splitting function matrices

Splitting function matrices and their actions on PDFs are defined in module dglap_objects (accessible as usual from module hoppet_v1). They have type split_mat. Below we shall discuss routines for creating specific predefined DGLAP splitting matrices, but for now we consider a general splitting matrix.

The allocation of split_mat objects,

```
type(split_mat) :: P
integer :: nf_lcl
call AllocSplitMat(grid, P, nf_lcl)
```

is similar to that for $grid_conv$ objects. The crucial difference is that one must supply a value for n_f , so that when the splitting matrix acts on a PDF it knows which flavours are decoupled. From the point of view of subsequent initialisation a $split_mat$ object just consists of a set of splitting functions. If need be, they can be initialised by hand, for example

```
call InitGridConv(grid,P%qq
                                  , P_function_qq
  call InitGridConv(grid,P%qg
                                   , P_function_qg
                                  , P_function_gq
  call InitGridConv(grid,P%gq
                              , P_function_gg
  call InitGridConv(grid,P%gg
  call InitGridConv(grid,P%NS_plus , P_function_NS_plus )
  call InitGridConv(grid,P%NS_minus, P_function_NS_minus)
  call InitGridConv(grid,P%NS_V
                                  , P_function_NS_V
We can then write
  real(dp), pointer :: q(:,:), delta_q(:,:)
  [... allocations, etc. ...]
  delta_q = P .conv. q
  delta_q = P * q
```

and delta_q will have the following components

$$\begin{pmatrix} \delta \Sigma \\ \delta g \end{pmatrix} = \begin{pmatrix} \mathsf{P} \% \mathsf{q} \mathsf{q} & \mathsf{P} \% \mathsf{q} \mathsf{g} \\ \mathsf{P} \% \mathsf{g} \mathsf{q} & \mathsf{P} \% \mathsf{g} \mathsf{g} \end{pmatrix} \otimes \begin{pmatrix} \Sigma \\ g \end{pmatrix}$$

$$\delta q_{\mathrm{NS},i}^{+} = \mathsf{P} \% \mathsf{NS_plus} \otimes q_{\mathrm{NS},i}^{+}$$

$$\delta q_{\mathrm{NS}}^{-} = \mathsf{P} \% \mathsf{NS_minus} \otimes q_{\mathrm{NS},i}^{-}$$

$$\delta q_{\mathrm{NS}}^{V} = \mathsf{P} \% \mathsf{NS_V} \otimes q_{\mathrm{NS}}^{V}$$

$$(20)$$

We have written the result in terms of components in the evln representation (and this is the representation used for the actual convolutions). When a convolution with a PDF in human representation is carried out, the program automatically copies the PDF to the evln representation, carries out the convolution and converts the result back to the human representation. The cost of changing a representation is $\mathcal{O}(N_x)$, whereas the convolution is $\mathcal{O}(N_x^2)$, so in principle the former is negligible. In practice, especially when aiming for high speed at low N_x , the change of representation can imply a significant cost. In such cases, if multiple convolutions are to be carried out, it may be advantageous to manually change into the appropriate evln representation, carry out all the convolutions and then change back to the human manually representation at the end, see Sect. 5.1.

As for grid_conv objects, a variety of routines have been implemented to help manipulate splitting matrices:

```
type(split_mat) :: PA, PB, PC
real(dp) :: factor
call InitSplitMat(PA,PB[,factor])
                                  ! PA = PB [*factor] (opt.alloc)
                                    ! PA = 0
call SetToZero(PA)
call Multiply(PA,factor)
                                    ! PA = PA * factor
call AddWithCoeff(PA,PB[,factor])
                                    ! PA = PA + PB [*factor]
call SetToConvolution(PA,PB,PC)
                                    ! PA = PB*PC
                                                           (opt.alloc)
                                    ! PA = PB*PC-PC*PB
call SetToCommutator(PA,PB,PC)
                                                           (opt.alloc)
call Delete(split_mat)
                                    ! PA's memory freed
```

5.2.1 Derived splitting matrices

As with grid_conv objects, HOPPET provides means to construct a split_mat object that corresponds to an arbitrary series of split_mat operations, as long as they all involve the same value of n_f . One proceeds in a very similar way as in Sect. 4.3.2,

```
real(dp), pointer :: probes(:,:,:)
type(split_mat) :: PA, PB, Pcomm
integer :: i
[...set nf_lcl,...]
```

Note that we need to provide the number of active quark flavours to GetDerivedSplitMatProbes. As in Sect. 4.3.2, we first need to set up some 'probe' PDFs (note the extra dimension compared to earlier, since we also have flavour information; the probe index always corresponds to the last dimension); then we act on those probes; finally we allocate the splitting matrix, and set its contents based on the probes, which are then automatically deallocated.

5.3 The DGLAP convolution components

5.3.1 QCD constants

The splitting functions that we set up will depend on various QCD constants (n_f , colour factors), so it is useful to here to summarise how they are dealt with within the program.

The treatment of the QCD constants is *not* object oriented. There is a module (qcd) that provides access to commonly used constants in QCD:

```
real(dp) :: ca, cf, tr, nf
integer :: nf_int

real(dp) :: beta0, beta1, beta2
[ ... ]
```

Note that **nf** is in double precision — if you want the integer value of n_f , use **nf_int**.

To set the value of n_f , call

```
integer :: nf_lcl
call qcd_SetNf(nf_lcl)
```

where we have used the local variable nf_lcl to avoid conflicting with the nf variable provided by the qcd module. Whatever you do, do not simply modify the value of the nf variable by hand — when you call qcd_SetNf it adjusts a whole set of other constants (e.g. the β function coefficients) appropriately.

There are situations in which it's of interest to vary the other colour factors of QCD, for example, if these colour factors are to be determined from a fit to deep-inelastic scattering experimental data. For that purpose, use

```
real(dp) :: ca_lcl, cf_lcl, tr_lcl
call qcd_SetGroup(ca_lcl, cf_lcl, tr_lcl)
```

Again all other constants in the qcd module will be adjusted. A word of caution: the NNLO splitting functions actually depend on a colour structure that goes beyond the usual C_A , C_F and T_R , namely $d_{abc}d^{abc}$, which in the present version of HOPPET is hard-wired to its default QCD value.

5.3.2 DGLAP splitting matrices

The module dglap_objects includes a number of routines for providing access to the split_mat objects corresponding to DGLAP splitting functions

In each case the splitting function is set up for the n_f and colour-factor values that are current in the qcd module, as set with the qcd_SetNf and qcd_SetGroup subroutine calls. If one subsequently resets the n_f or colour factor values, the split_mat objects continue to correspond to the n_f and colour factor values for which they were initially calculated. With the above subroutines for initialising DGLAP splitting functions, the normalisation is as given in eq. (4).

In practice, because convolutions take a time $\mathcal{O}(N^2)$, where N is the number of points in the grid, whereas additions and multiplications take a time $\mathcal{O}(N)$, in a program it is more efficient to first sum the splitting matrices and then carry out the convolution,

Note the use of brackets in the line setting dq: all scalar factors are first multiplied together $(\mathcal{O}(1))$ so that we only have one multiplication of a PDF $(\mathcal{O}(N_x))$. Note also that we have chosen to include the (as2pi * dt) factor as multiplying the pdf, rather than the other option of multiplying P_sum, i.e.

```
call Multiply(P_sum, (as2pi * dt))
dq = P_sum .conv. q
```

The result would have been identical, but splitting matrices with positive interpolation order essentially amount to an $\mathcal{O}(7 \times \text{order} \times N)$ sized array, whereas the PDF is an $\mathcal{O}(13N)$ sized array and the for high positive orders that are sometimes used, it is cheaper to multiply the latter.

The default for the NNLO splitting functions are the interpolated expressions, which are very fast to evaluate. Other possibilities, like the exact splitting functions or a previous set of approximated NNLO splitting functions which was used before the full calculation

was available are described in Appendix D. Note that the QCD colour factors introduced in Sect. 5.3.1 cannot be modified if the interpolated NNLO splitting functions are used, since these expressions use the default QCD values.

5.3.3 Mass threshold matrices

Still in the dglap_objects module, we have a type dedicated to crossing heavy quark mass thresholds.

```
type(grid_def) :: grid
type(mass_threshold_mat) :: MTM_NNLO

call InitMTMNNLO(grid, MTM_NNLO) ! MTM_NNLO is coeff of (as/2pi)**2
```

This is the coefficient of $(\alpha_s/2\pi)^2$ for the convolution matrix that accounts for crossing a heavy flavour threshold in $\overline{\rm MS}$ factorisation scheme, at $\mu_F = m_h$, where m_h is the heavy-quark pole mass, as has been described in Sect. 2. Since the corresponding NLO term is zero, the number of flavours in α_s is immaterial at NNLO.

The treatment of n_f in the mass_threshold_mat is very specific because at NNLO, the only order in the $\overline{\rm MS}$ factorisation scheme at which it's non-zero and currently known, it is independent of n_f . Its action does of course however depend on n_f . Since, as for split_mat objects, we don't want to the action of of the mass_threshold_mat to depend on the availability of the current n_f information from the qcd module, instead we require that before using a mass_threshold_mat, you should explicitly indicate the number of flavours (defined as including the new heavy flavour). This is done using a call to the SetNfMTM(MTM_NNLO,nf_incl_heavy) subroutine. So for example to take a PDF in the effective theory with $n_f=3$ active flavours pdf_nf3, and convert it to the corresponding PDF in the effective theory with $n_f=4$ active flavours pdf_nf4 at m_h^2 , one uses code analogous to the following

```
real(dp) :: pdf_nf3(:,:), pdf_nf4(:,:)
[ ... ]
call SetNfMTM(MTM, 4)
pdf_nf4 = pdf_nf3 + (as2pi)**2 * (MTM_NNLO.conv.pdf_nf3)
```

The convolution only works if the pdf's are in the human representation and an error is given if this is not the case. Any heavy flavour (like for example intrinsic charm) present in pdf_nf3 would be left in unchanged.

Note that the type mass_threshold_mat is not currently suitable for general changes of flavour-number. For example if you wish to carry out a change in the DIS scheme or at a scale $\mu_F \neq m_h$ then you have to combine a series of different convolutions (essentially correcting with the lower number of flavours to the $\overline{\rm MS}$ factorisation scheme at $\mu_F = m_h$ before changing the number of flavours and then correcting back to the original scheme and scale using the higher number of flavours).

As for the NNLO splitting functions, the mass threshold corrections come in exact and parametrised variants. By default it is the latter that is used (provided by Vogt [33]). The cost of initialising with the exact variants of the mass thresholds is much lower than for the

exact NNLO splitting functions (partly because there is no n_f dependence, partly because it is only one flavour component of the mass-threshold function that is complex enough to warrant parametrisation). The variant can be chosen by the user before initialising the mass-threshold_mat by making the following subroutine call:

```
integer :: threshold_variant
  call dglap_Set_nnlo_nfthreshold(threshold_variant)
with the following variants defined (as integer parameters), again in the module dglap_choices:
  nnlo_nfthreshold_exact
  nnlo_nfthreshold_param [default]
```

5.3.4 Putting it together: dglap_holder

The discussion so far in this subsection was intended to provide the reader with an overview of the different DGLAP components that have been implemented and of how they can be initialised individually. This is useful above all if the user needs to tune the program to some specific unusual application.

In practice, one foresees that most users will need just a standard DGLAP evolution framework, and so will prefer not need to manage all these components individually. Accordingly HOPPET provides a type, dglap_holder which holds all the components required for a given kind of evolution. To initialise all information for a fixed-flavour number evolution, one does as follows

The constants factscheme_* are defined in module dglap_choices. The corrections to the splitting functions to get the DIS scheme are implemented by carrying out appropriate convolutions of the $\overline{\rm MS}$ splitting and coefficient functions. Currently the DIS scheme is only implemented to NLO⁸. The polarised splitting functions are only currently known to NLO.

Initialisation can also be carried out with a single call for a range of different numbers of flavours:

⁸It's NNLO implementation would actually be fairly straightforward given the parametrisation provided in [34], and may be performed in future releases of HOPPET.

```
integer :: nflo, nfhi
[...]
nflo = 3; nfhi = 6   ! [calls to qcd_SetNf handled automatically]
call InitDglapHolder(grid, dglap_h, factscheme, nloop, nflo, nfhi)
```

Mass thresholds are not currently correctly supported in the DIS scheme.

For all the above calls, at NNLO the choice of exact of parametrised splitting functions and mass thresholds is determined by the calls to dglap_Set_nnlo_splitting and dglap_Set_nnlo_nfthreshold, as described in Sects. 5.3.2 and 5.3.3 respectively. These calls must be made prior to the call to InitDglapHolder.

Having initialised a dglap_holder one has access to various components:

```
type dglap_holder
  type(split_mat), pointer :: allP(1:nloop, nflo:nfhi) ! FFNS: nflo=nfhi=nf_lcl
  type(split_mat), pointer :: P_LO, P_NLO, P_NNLO
  type(mass_threshold_mat) :: MTM2
  logical :: MTM2_exists
  integer :: factscheme, nloop
  integer :: nf
  [ ... ]
end type dglap holder
```

Some just record information passed on initialisation, for example factscheme and nloop. Other parts are set up once and for all on initialisation, notably the allP matrix, which contains the 1-loop, 2-loop, etc. splitting matrices for the requested n_f range.

Yet other parts of the dglap_holder type depend on n_f . Before accessing these, one should first perform the following call:

```
call SetNfDglapHolder(dglap_h, nf_lcl)
```

This creates links:

```
dglap_h%P_LO => dglap_h%allP(1,nf_lcl)
dglap_h%P_NLO => dglap_h%allP(2,nf_lcl)
dglap_h%P_NNLO => dglap_h%allP(3,nf_lcl)
```

for convenient named access to the various splitting matrices, and it also sets the global (qcd) n_f value (via a call to qcd_SetNf) and where relevant updates the internal n_f value associated with MTM2 (via a call to SetNfMTM).

As with other types that allocate memory for derived types, that memory can be freed via a call to the Delete subroutine,

```
call Delete(dglap_h)
```

6 DGLAP evolution

So far we have described all the tools that are required to perform DGLAP convolutions of PDFs. In this section we describe how the different ingredients are put together to perform the actual evolution.

6.1 Running coupling

Before carrying out any DGLAP evolutions, one first needs to set up a running_coupling object (defined in module qcd_coupling):

As can be seen, many of the arguments are optional. Their default values are as follows:

The running coupling object is initialised so that at scale Q the coupling is equal to alfas. The running is carried out with the nloop β -function. If the fixnf argument is present, then the number of flavours is kept fixed at that value. Otherwise flavour thresholds are implemented at scales

```
muMatch_mQuark * quark_masses(4:6)
```

where the quark masses are *pole* masses. The choice to use pole masses (and their particular default values) is inspired by the benchmark runs [19] in which HOPPET results were compared to those of Vogt's moment-space code QCD-Pegasus [3]. The default value of the QCD coupling is taken to be close to the present world average [35].

To access the coupling at some scale Q one uses the following function call:

```
alfas = Value(coupling, Q [, fixnf])
```

This is the value of the coupling as obtained from the Runge-Kutta solution of the nloop version of eq. (5) (the numerical solution is actually carried out for $1/\alpha_s$), together with the appropriate mass thresholds. For typical values of $\alpha_s(M_Z)$ the coupling is guaranteed to be reliably determined in the range 0.5 GeV $< Q < 10^{19}$ GeV. The values of the β function coefficients used in the evolution correspond to those obtained with the values of the QCD colour factors that were in vigour at the moment of initialisation of the coupling.

In the variable flavour-number case, the fixnf argument allows one to obtain the coupling for fixnf flavours even outside the natural range of scales for that number of flavours. This is only really intended to be used close to the natural range of scales, and can be slow if one goes far from that range (a warning message will be output). If one is interested in a coupling that (say) never has more than 5 active flavours, then rather than

using the fixnf option in the Value subroutine, it is best to initialise the coupling with a fictitious large value for the top mass.

Often it is convenient to be able to enquire about the mass information embodied in a running_coupling. For example in the PDF evolution below, all information about the location of mass thresholds is obtained from the running_coupling type.

The quark pole mass for flavour ifly can be obtained with the call

```
pole_mass = QuarkMass(coupling, iflv)
```

The range of scales, Qlo < Qhi for which ifly is the heaviest active flavour is obtained by the subroutine call

```
call QRangeAtNf(coupling, iflv, Qlo, Qhi [, muM_mQ])
```

The optional argument muM_mQ allows one to obtain the answer as if one had initialised the coupling with a different value of muMatch_mQuark than that actually used. One can also establish the number of active flavours, nf_active, at a given scale Q with the following function:

```
nf_active = NfAtQ(coupling, Q [, Qlo, Qhi] [, muM_mQ])
```

As well as returning the number of active flavours, it can also set Qlo and Qhi, which correspond to the range of scales in which the number of active flavours is unchanged. The optional muM_mQ argument has the same purpose as in the QRangeAtNf subroutine. The last of the enquiry functions allows one to obtain the range of number of flavours covered in this coupling, $nflo \leq n_f \leq nfhi$:

```
call NfRange(coupling, nflo, nfhi)
```

Finally, as usual, once you no longer need a running_coupling object, you may free the memory associated with it using the Delete call:

call Delete(coupling)

6.2 DGLAP evolution

6.2.1 Direct evolution

We are now, at last, ready to evolve a multi-flavour PDF. This is done by breaking the evolution into steps, and for each one using a Runge-Kutta approximation for the solution of a first-order matrix differential equation. The steps are of uniform size in a variable u that satisfies the following approximate relation

$$\frac{du}{d\ln Q^2} \simeq \alpha_s(Q^2) \ . \tag{21}$$

For a 1-loop running coupling one has $u = (\ln \ln Q^2/\Lambda)/\beta_0$, which is the variable that appears in analytical solutions to the 1-loop DGLAP equation. The step size in u, du, can be set with the following call

```
real(dp) :: du = 0.1_dp ! or some smaller value
call SetDefaultEvolutionDu(du)
```

The error on the evolution from the finite step size should scale as $(du)^4$. With the default value of du = 0.1, errors are typically somewhat smaller than 10^{-3} (see Sect. 9 for the detailed benchmarks).

To actually carry out the evolution, one uses the following subroutine call:

which takes a PDF array pdf and uses the splitting matrices in dglap_h to evolve it from scale Q_init to scale Q_end. By default the renormalisation to factorisation scale ratio is muR_Q = 1.0 and the number of loops in the evolution is the same as was used for the running coupling (the nloop optional argument makes it possible to override this choice). Variable flavour-number switching takes place at the pole masses (maybe one day this restriction will be lifted) as associated with the coupling.

If the dglap_holder object dglap_h does not support the relevant number of loops or flavours, the program will give an error message and stop. With the untie_nf option you can request that the number of flavours in the evolution be 'untied' from that in the coupling in the regions where dglap_h does not support the number of flavours used in the coupling. Instead the closest number of flavours will be used.⁹

Mass thresholds (NNLO) are implemented as described in Sect. 2:

$$\mathrm{pdf}_{n_f} = \mathrm{pdf}_{n_f-1} + \left(\frac{\alpha_s^{(n_f)}(x_\mu m_h^2)}{2\pi}\right)^2 (\mathrm{dglap_h\%MTM2} \ .\mathrm{conv.} \ \mathrm{pdf}_{n_f-1}) \ , \tag{22a}$$

$$\operatorname{pdf}_{n_f-1} = \operatorname{pdf}_{n_f} - \left(\frac{\alpha_s^{(n_f)}(x_\mu m_h^2)}{2\pi}\right)^2 (\operatorname{dglap_h\%MTM2} .\operatorname{conv.} \operatorname{pdf}_{n_f}) , \qquad (22b)$$

when crossing the threshold upwards and downwards, respectively. Note that the two operations are not perfect inverses of each other, because the number of flavours of the pdf used in the convolution differs in the two cases. The mismatch however is only of order α_s^4 (NNNNLO), i.e. well beyond currently known accuracies.

⁹For example if dglap_h was initialised with $n_f = 3...5$ while the coupling has $n_f = 3...6$, then variable flavour number evolution will be used up to $n_f = 5$, but beyond the top mass the evolution will carry on with 5 flavours, while the coupling uses 6 flavours. There probably aren't too many good reasons for doing this (other than for examining how much it differs from a 'proper' procedure).

A general remark is that crossing a flavour threshold downwards will nearly always result in some (almost certainly physically spurious) intrinsic heavy-flavour being left over below threshold.

6.2.2 Precomputed evolution and the evln_operator

Each Runge-Kutta evolution step involves multiple evaluations of the derivative of the PDFs, and the evolution between two scales may be broken up into multiple Runge-Kutta steps. This amounts to a large number of convolutions. It can therefore be useful to create a single *derived* splitting matrix that is equivalent to the whole evolution between the two scales.

A complication arises because evolutions often cross flavour thresholds, whereas a derived splitting matrix is only valid for fixed n_f . Therefore a new type has to be created, evln_operator, which consists of a linked list of splitting and mass threshold matrices, breaking an evolution into a chain of interleaved fixed-flavour evolution steps and flavour changing steps. An evln_operator is created with a call that is almost identical to that used to evolve a PDF:

It can then be applied to PDF in the same way that a normal split_mat would:

```
pdf_end = evop * pdf_init     ! assume both pdfs already allocated
! OR (alternative form)
pdf_end = evop .conv. pdf_init
```

As usual the Delete subroutine can be used to clean up any memory associated with an evolution operator that is no longer needed.

7 Tabulated PDFs

The tools in the previous section are useful if one knows that one needs DGLAP evolution results at a small number of predetermined Q values. Often however one simply wishes to provide a PDF distribution at some initial scale and then subsequently be able to access it at arbitrary values of x and Q. For this purpose it is useful (and most efficient) to produce a table of the PDF as a function of Q^2 , which then allows for access to the PDF at arbitrary x, Q using an interpolation. All types and routines discussed in this section are in the pdf_tabulate module, or accessible also from hoppet_v1.

7.1 Preparing a PDF table

The type that contains a PDF table is pdf_table. It first needs to be allocated,

where one specifies the range of Q values to be tabulated, from Qmin to Qmax, and optionally the interpolation step size dlnlnQ in the variable $\ln \ln Q/(0.1~{\rm GeV})$ (default dlnlnQ = 0.07, sufficient for 10^{-3} accuracy), the interpolation order lnlnQ_order, equal to 3 by default, and finally whether PDFs are to be frozen below Qmin, or instead set to zero (the default is freeze_at_Qmin=.false., i.e. they are set to zero).¹⁰

By default a tabulation knows nothing about n_f thresholds, which means that in the neighbourhood of thresholds the tabulation would be attempting to interpolate a discontinuous function (at NNLO). To attribute information about n_f thresholds to the tabulation, set them up first in a running coupling object and then transfer them:

call AddNfInfoToPdfTable(table,coupling)

When interpolating the table (see below), the set of Q values for the interpolation will be chosen to as to always have a common n_f value. Note that AddNfInfoToPdfTable may only be called once for an allocated table: if you need to change the information about n_f thresholds, Delete the table, reallocate it and then reset the n_f information. This is not necessary if you just change the value of the coupling.

Given an existing table, ref_table, a new table, new_table, can be allocated with identical properties (including any n_f information) as follows

```
call AllocPdfTable(new_table, ref_table)
```

All of the above routines can be used with 1-dimensional arrays of tables as well (in AllocPdfTable the reference table must always be a scalar).

A table can be filled either from a routine that provides the PDFs as a function of x and Q, or alternatively by evolving a PDF at an initial scale. The former can be achieved with

```
call FillPdfTable_LHAPDF(table, LHAsub)
```

where LHAsub is any subroutine with the LHAPDF interface, *i.e.*, as shown earlier in Sect. 5.1.1.

To fill a table via an evolution from an initial scale, one uses

```
type(pdf_table) :: table
type(dglap_holder) :: dglap_h
type(running_coupling) :: coupling
real(dp), pointer :: initial_pdf(:,:)
```

 $^{^{10}}$ Note that the spacing and interpolation in Q are treated independently of what's done in the PDF evolution. A reason for this is that in the PDF evolution one uses a variable related to the running coupling, which is similar to $\ln \ln Q$ but whose precise details depend on the particular value of the coupling. Using this in the tabulation would have prevented one from having a tabulation disconnected from any coupling. Unfortunately du and dlnlnQ are not normalised equivalently — roughly speaking for $n_f = 4$ they correspond to the same spacing if dlnlnQ $\simeq 0.7$ du.

which takes an the initial_pdf at scale Q0, and evolves it across the whole range of Q values in the table, using the EvolvePDF routine. The arguments have the same meaning as corresponding ones in EvolvePDF, explained in Sect. 6.2.1. The du value that's used is the default one for EvolvePDF which, we recall, may be set using SetDefaultEvolutionDu(du). If the Q spacing in the tabulation is such that steps in du would be too large, then the steps are automatically resized to the tabulation spacing.

One may also use the precomputed evolution facilities of Sect. 6.2.2, by calling the routine

prepares $evln_operators$ for all successive Q intervals in the table. An accelerated evolution that uses these operators instead of explicit Runge-Kutta steps may then be obtained by calling

```
call EvolvePdfTable(table, initial_pdf)
```

The EvolvePdfTable routine may be called as many times as one likes, for different initial PDFs for example; however, if one wishes to change the parameters of the evolution (coupling, perturbative order, etc.) in the precomputed option, one must first Delete the table and then prepare again it.

7.2 Accessing a table

The main way to access a table is as follows

```
real(dp) :: pdf(-6:6), y, x, Q
[...]
call EvalPdfTable_yQ(table, y, Q, pdf)
! or using x
call EvalPdfTable_xQ(table, x, Q, pdf)
```

There may be situations where it is useful to access the internals of a pdf_table, for example because one would like to carry out a convolution systematically on the whole contents of the table. Among the main elements are

where the third dimension of tab spans the range of tabulated Q values, and the n_f and coupling information are only allocated and set if one has called AddNfInfoToPdfTable for the table.

An example of usage of the low-level information contained in the table is the following, which initialises table_deriv_LO with the LO derivative of table:

where we assume table_deriv_LO to have been allocated with an appropriate structure at some point, e.g. via

```
call AllocPdfTable(table_deriv_LO, table)
```

The above mechanism has found use in the a-posteriori PDF library [17, 18] and in work matching event shapes with fixed-order calculations [15, 14]. One could also imagine using it to obtain tables of (flavour-separated) structure functions, if one were to convolute with coefficient functions rather than splitting functions.

As with all other objects, a pdf_table object can be deleted using

```
call Delete(table)
```

Notice that a table is a local variable in each procedure and so effectively a different variable each separate procedure. If ones needs to use a PDF table across different procedures, it has to be defined within a module. In Appendix A, there is a detailed example of different ways of accessing a table.

8 Streamlined interface

Now we present the streamlined interface to HOPPET, intended to allow easy access to the essential evolution functionality from languages other than F95. It hides all the object-oriented nature of the program, and provides access to one pdf_table, based on a single grid definition. The description will be given as if one is calling from F77. An include file src/hoppet_v1.h is provided for calling from C++ — the interface is essentially identical to the Fortran one, with the caveat that names are case sensitive (the cases are as given below), and that PDF components referred to below as pdf(-6:6) become pdf[0..12]. A summary of the most relevant procedures of this interface and their description can be found in the reference guide, Appendix B.

8.1 Initialisation

The simplest way of initialising the streamlined interface is by calling

```
call hoppetStart(dy,nloop)
```

which will set up a compound (four different spacings) grid with spacing dy at small x, extending to y = 12, and numerical order = -5. The Q range for the tabulation will be 1 GeV < Q < 28 TeV and a reasonable choice will be made for the dlnlnQ spacing (related to dy). It will initialise splitting functions up to nloop loops (though one can still carry out evolutions with fewer loops). If you need more control over the initialisation, you should use

```
call hoppetStartExtended(ymax,dy,Qmin,Qmax,dlnlnQ,nloop,order,factscheme)
```

which will again set up compound grid, but give control over the numerical **order** and the y and Q ranges and spacings (as before **dy** is the spacing at small x). It also allows one to choose the type of evolution according to **factscheme**.

8.2 Usage

To carry out an evolution, one should first decide whether one wants a fixed-flavour number scheme or a variable flavour number scheme (the default). Either can be set with its parameters as follows:

```
call hoppetSetFFN(fixed_nf)
call hoppetSetVFN(mc, mb, mt) ! Heavy quark pole masses
```

where for the VFN one specifies the pole-masses for the quarks. An evolution is carried out with the following routine

```
call hoppetEvolve(asQ, QOalphas, nloop, muR_Q, LHAsub, QOpdf)
```

where one specifies the coupling asQ at a scale QOalphas, the number of loops for the evolution, nloop, the ratio of renormalisation to factorisation scales muR_Q, 11 the name of a subroutine LHAsub with interface

```
subroutine LHAsub(x,Q,pdf)
  implicit none
  double precision x,Q,pdf(-6:6)
  [...] ! sets pdf to be momentum densities, e.g. pdf(0) = xg(x)
end subroutine
```

to return the initial condition for the evolution and the scale QOpdf at which one starts the PDF evolution. Note that the LHAsub subroutine will only be called with Q = QOpdf. To access the coupling one uses

```
alphas = hoppetAlphaS(Q)
```

¹¹Note that in the streamlined interface, with $\mathtt{muR_Q} \neq 1$, the running coupling flavour thresholds are still placed at the quark masses; the evolution needs the coupling for a given number of flavours outside the standard range for that number of flavours (precisely because $\mathtt{muR_Q} \neq 1$) and this is done automatically in the evolution. In contrast in the benchmark studies [19], the flavour thresholds for the coupling were placed at $\mathtt{muR_Q} \times m_Q$. This is a perfectly valid alternative, but can complicate the specification of the α_s value — for example with $\mathtt{muR_Q} = 0.5$ the matching for the top threshold would be carried out at $\mu = 0.5m_t \simeq 85$ GeV, and if one specified the coupling at scale M_Z , it wouldn't be clearer whether this was a 5-flavour value or a 6-flavour value. With the procedure adopted in the streamlined interface the issue does not arise. (While in F95 the user has the freedom to do as they prefer).

while the PDF at a given value of x and Q is obtained with

```
call hoppetEval(x,Q,f)
```

which sets f(-6:6) (recall that it is xg(x), etc., that are returned, since this is what is used through HOPPET).

It is also possible to prepare an evolution in cached form. This is useful if one needs to evolve many different PDF sets with the same evolution properties (coupling, initial scale, etc.), as is the usual situation in global analyses of PDFs, because though the preparation may take a bit longer than a normal evolution (2–10 times depending on the order), once it is done, cached evolutions run 3–4 faster than a normal evolution. The preparation of the cache is carried out with

```
call hoppetPreEvolve(asQ, QOalphas, nloop, muR_Q, QOpdf)
```

and then the cached evolution is carried out with

```
call hoppetCachedEvolve(LHAsub)
```

The results may be very slightly different from those in a normal evolution (some information is lost when caching), and the user may wish to check on a case-by-case basis that such differences don't matter in practice.

The tabulation can also be filled with the contents of an external PDF package, by calling

```
call hoppetAssign(LHAsub)
```

where LHAsub is the name of any subroutine with the interface given above, which will now be called with a range of Q values corresponding to the internal tabulation scales. This essentially just transfers an external tabulation into HOPPET's internal representation.

Finally given an evolved or assigned PDF, one can obtain information about convolutions of the splitting functions with the PDFs:

```
call hoppetEvalSplit(x,Q,iloop,nf,f)
```

sets f(-6:6) equal to the value at x, Q of convolution of the iloop splitting function matrix (with nf flavours) with the currently tabulated PDF. If nf < 0 the number of flavours used is the one appropriate at the specified Q scale (as long as the information is available, i.e. one of hoppetEvolve or hoppetCachedEvolve has been called). The first call with a given nf for a specified iloop will be slow (\sim the time for a cached evolution), but subsequent calls with the same values will be fast.

The routines described here are to be found in src/streamlined_interface.f90 and may provide inspiration for the user wishing to write their own F95 code for HOPPET.

9 Benchmarks

Key questions in assessing the usefulness of a PDF evolution code include that of its correctness, its accuracy and its speed. HOPPET's correctness has been established with a reasonable degree of confidence in the benchmark tests [19] where it was compared with

the Mellin space based evolution code QCD-Pegasus [3]. The program used to carry out those tests is available as benchmarks/benchmarks.f90. The user should carefully read the detailed comments at the beginning for usage instructions.

The results used in [19] were obtained with very finely spaced grids, in order to guarantee small numerical errors ($\lesssim 10^{-7}$). Such accuracies are useful when comparing and testing two independent codes, because differences or bugs in the implementation of the physics (especially the higher-order parts) may only manifest themselves as small changes in the results.

In contrast, for use in most physical applications, an accuracy in the range 10^{-3} to 10^{-4} is generally y more than adequate, since it is rare for other sources of numerical uncertainty (e.g. Monte Carlo integration errors in NLO codes, or experimental errors) to be comparably small. The critical issue in such cases is more likely to be the speed of the code, for example in PDF fitting applications.

HOPPET's accuracy and speed both depend on the choice of grid (in y) and the evolution and/or tabulation steps in Q. We shall start with the question of the accuracy.

9.1 Accuracy

To measure the accuracy, we use the same initial condition and evolution parameters as in [19]:

$$xu_v(x) = 5.107200x^{0.8}(1-x)^3,$$
 (23a)

$$xd_v(x) = 3.064320x^{0.8}(1-x)^4,$$
 (23b)

$$x\bar{d}(x) = 0.1939875x^{-0.1}(1-x)^6$$
, (23c)

$$x\bar{u}(x) = x\bar{d}(x)(1-x), \qquad (23d)$$

$$xs(x) = x\bar{s}(x) = 0.2(x\bar{d}(x) + x\bar{u}(x)),$$
 (23e)

$$xg(x) = 1.7x^{-0.1}(1-x)^5,$$
 (23f)

where $u_v \equiv u - \bar{u}$, $d_v \equiv d - \bar{d}$, and all other flavours are zero. The initial scale 12 is $Q_0 = (\sqrt{2} - \bar{\epsilon})$ GeV, $\alpha_s(Q_0) = 0.35$ and the charm, bottom and top pole masses are kept at the default values, $\sqrt{2}$, 4.5 and 175 GeV respectively (as used also in the streamlined interface). Observe that the initial conditions and coupling are actually both given for three active flavours (i.e. infinitesimally below the charm mass). The evolution is carried out to NNLO accuracy in a variable flavour number scheme, including the mass thresholds in the coupling and PDF.

All tests here are carried out based on tabulations of the PDF evolution, Sect. 7. We first run HOPPET with a very fine grid spacing to provide a reference result. Then we run the evolution for a coarser grid — the accuracy of the coarser grid is determined by comparing its results with those from the reference grid. We determine the relative accuracy for each flavour at 5000 points in the x, Q plane, as shown in Fig. 2. The points

¹²With $\bar{\epsilon}$ an infinitesimal number. Note that this is unrelated to the evolution accuracy ϵ , introduced later in this section.

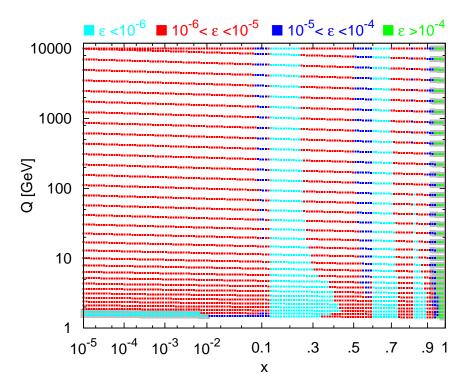


Figure 2: The set of points in x, Q used to determine the accuracy of the evolution. The areas shaded in grey are regions where one of the flavours is in the neighbourhood of a sign-change (bottom-left: c, \bar{c} , right: \bar{u}) and so is ignored in the accuracy determination. The accuracies shown here correspond to a y grid with a base spacing of dy = 0.2 and other parameters as described in the text for Fig. 3. The colour coding indicates the error in the least-well determined (non-excluded) flavour channel $(\bar{b} \dots b)$ at each point.

are uniformly spaced in $\zeta = \ln 1/x + 9(1-x)$ so as to obtain fine coverage at small and large x. The Q values are chosen more closely spaced at low Q where the evolution is fastest and they are taken slightly correlated with ζ so as to cover a nearly continuous range of Q.¹³

One difficulty that arises when examining relative accuracies is that some flavours change sign as one varies x or Q. Close to the zero the relative accuracy diverges because of the small value of the denominator. Therefore in global accuracy estimates, we eliminate flavours in the region where they change sign (within $\Delta \zeta = 0.4$ and at the neighbouring Q value). Specifically, for our initial conditions, this corresponds to c, \bar{c} for the two lowest Q values below $x \sim 10^{-2}$ and \bar{u} for $x \gtrsim 0.9$. The exact regions are shaded in grey in Fig. 2.

¹³This procedure differs from that in [19] where fewer (500) points were used and one compared not individual flavours, but combinations intended to be more directly revealing of any deficiencies in the evolution. This reflects the difference in needs between obtaining a global measure of the accuracy and providing benchmarks intended in part to facilitate the debugging of independent codes.

¹⁴The change in sign of the charm distribution is not worrying physically since it is close to threshold where it will be compensated for by finite mass effects in the coefficient functions; for \bar{u} the sign change

Our tabulation covers the range $10^{-5} < x < 1$, $\sqrt{2} < Q < 10^4$ GeV. The grid in $y = \ln 1/x$ will consist of 4 nested subgrids: one covering the whole y range with spacing dy and others with spacings $\mathrm{dy}/3$, $\mathrm{dy}/9$, $\mathrm{dy}/27$ extending to y = 2, 0.5, 0.2 respectively. Except where stated we shall use $\mathrm{order} = -6$. In Q the default interpolation order will be 4. The reference grids use $\mathrm{dy} = 0.025$ and $\mathrm{dlnlnQ} = 0.005$.

Fig. 3 shows the relative accuracy ϵ as a function of x for two grid-spacing choices (left dy = 0.2, right dy = 0.05, dlnlnQ = dy/4 in both cases). Each solid line corresponds to one Q value and shows the error in the least-well-determined flavour channel at each x, excluding flavour channels close to a sign-change. The relative accuracy ϵ is poorest as one approaches x = 1, where the PDFs all go to zero very rapidly and so have divergent logarithmic derivatives in x, $d \ln q/d \ln x$, adversely affecting the accuracy of the convolutions. This region is always the most difficult in x-space methods, however the use of multiple subgrids in x allows to one to obtain acceptable results for x < 0.9 which is likely to be the largest value of any phenomenological relevance.

At $x \sim 0.1$, 0.6 and 0.8 one notices step-like structures — these are the points where one switches between subgrids, with a significant degradation in accuracy at x values below the transition. These structures are also visible in the colour-coded accuracy representation in Fig. 2, which corresponds to dy = 0.2 and allows one to visualise more clearly the Q dependence of the accuracy. The effect of the grid spacing is clearly visible as one goes from the left to the right-hand plots of Fig. 3, with the reduction in the spacings by a factor of 4 leading to an improvement in accuracy by a factor ~ 100 .

For completeness we also show the parts of the charm channel that have been excluded because of the proximity to a sign change (dashed lines, lower-left shaded region of Fig.2). One observes in particular a spike near $x \simeq 7 \times 10^{-3}$ where the charm distribution has its zero. Including this in a estimate of the global accuracy would be senseless since it actually corresponds to a divergence and the peak-value for the spike is arbitrary, depending on the precise choice of points used to estimate the accuracy. The question of the exact region to exclude is somewhat arbitrary, but the choice made above seems not unreasonable in the light of Fig. 3.

Fig. 3 is useful in order to obtain a detailed picture of the accuracy of the evolution with a given set of parameters. To quote a single, global, number for the relative accuracy ϵ we make the conservative choice of taking the largest value of ϵ that occurs in a chosen x range. We will examine a restricted range, x < 0.7, studying just the g, u, d, s flavours, and also a wider range, x < 0.9 with all flavours.

Fig. 4 shows the effect of varying the base dy and dlnlnQ separately, while the other is fixed at the reference value. The 'guds' flavours in the x < 0.7 range are generally better determined, for a given set of grid parameters, than the full set of flavours up to x < 0.9. This is as one would expect since the large-x region is usually the hardest and the 'guds' flavours are generally somewhat smoother than the the others. Using only three y subgrids

is more surprising, though it may be related to non-trivial interactions between the evolutions of the u and \bar{u} components at NNLO (note that in the region of the sign change they differ by many orders of magnitude).

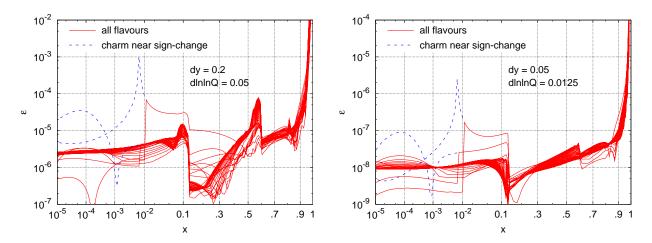


Figure 3: The relative accuracy ϵ of the least well determined flavour channel at each x, Q point, shown as a function of x for many Q values. The results for the part of the charm distribution excluded from the analysis (near sign change) are shown separately.

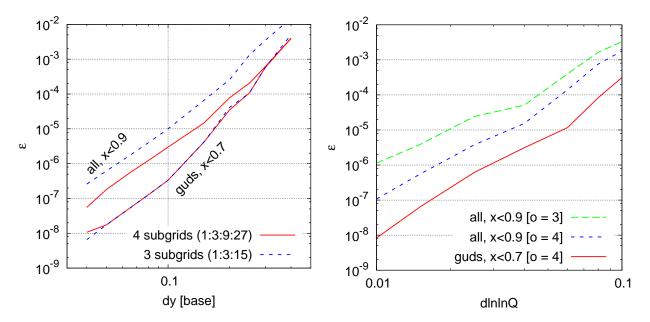


Figure 4: Left: the (globally) worst relative accuracy ϵ as a function of the base y-grid resolution parameter, dy — shown for two y-grid configurations and two x-ranges and flavour-sets. Right: the relative accuracy as a function of the resolution in $\ln \ln Q$ of the tabulation, dlnlnQ, for different x/flavour ranges and for different lnlnQ-order values (o).

		lf95	ifort	g95
t_s	[s]	0.9	0.66	2.8
t_{α}	[ms]	0.16	0.12	0.13
t_i	[ms]	37	38	330
t_p	[ms]	51	44	310
t_c	[ms]	8.8	9.8	110
t_{xQ}	$[\mu s]$	2.7	3.1	25

Table 2: Contributions to the run time in eqs. (24) for dy = 0.2 and dlnlnQ = 0.05 and standard values for the other parameters (on a 3.4GHz Pentium IV (D) with 2 MB cache).

worsens the situation when including the largest x values, and reducing the order in the Q interpolation also adversely affects the accuracy (also for x < 0.7, not shown).

From Fig. 4, we deduce that inaccuracies from the Q and y parts of the grid are similar when $\mathtt{dlnlnQ} = \mathtt{dy}/4$. This is the combination that we shall use as standard.

9.2 Timing

The time spent in HOPPET for a given analysis can expressed as follows, according to whether or not one carries out pre-evolution:

$$t_{\text{no pre-ev}} = t_s + n_{\alpha} t_{\alpha} + n_i (t_i + n_{xQ} t_{xQ}), \qquad (24a)$$

$$t_{\text{with pre-ev}} = t_s + n_\alpha (t_\alpha + t_p) + n_i (t_c + n_{xQ} t_{xQ}), \qquad (24b)$$

where t_s is the time for setting up the splitting functions, n_{α} is the number of different running couplings that one has, t_{α} is the time for initialising the coupling, n_i is the number of PDF initial conditions that one wishes to consider, t_i is the time to carry out the tabulation for a single initial condition, n_{xQ} is the number of points in x, Q at which one evaluates the full set of flavours once per PDF initial condition; in the case with preprepared cached evolution, t_p is the time for a preparing a cached evolution and t_c is the time for performing the cached evolution. Finally t_{xQ} is the time it takes to evaluate the PDFs at a given value of (x, Q^2) once the tabulation has been performed.

The various contributions to the run-time are shown in table 2 for dy = 0.2 and dlnlnQ = 0.05 (giving an accuracy $\sim 10^{-4}$), for various compilers. In a typical analysis where run-times matter, such as a PDF fit, it is to be expected that the time will be dominated by t_c (or t_i). However, in the typical case of global PDF fits, for which the number of x, Q points is rather large ($\gtrsim 3000$), it will be $n_{xQ}t_{xQ}$ that takes the most time¹⁵. We note (with regret!) the considerably speed advantage (almost an order of magnitude) that is to be had with commercial compilers.

We study t_c and t_i in more detail in Fig. 5, where we relate them to the accuracy obtained from the evolution. As one would expect, studying just the 'guds' flavours for

With these numbers, it is easy to check that a global fit with $n_{xQ} \sim 3000$ and $n_i \sim 10^5$ could be completed in less than half and hour.

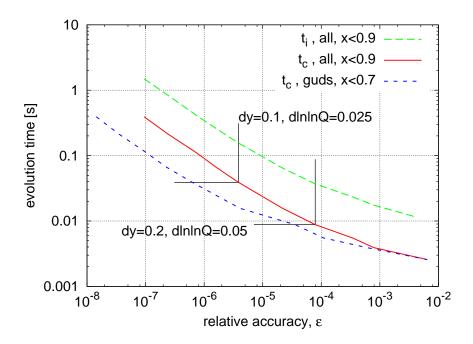


Figure 5: relative accuracy obtained as a function of the time taken to perform the evolution (lf95, 3.4GHz Pentium IV (D) with 2 MB cache).

x < 0.7 one obtains better accuracy for a given speed than with all flavours for x < 0.9. Overall one can obtain 10^{-4} accuracy with $t_c \simeq 10^{-2}$ s and 10^{-6} accuracy with $t_c \simeq 10^{-1}$ s. In general t_i is about 4–5 larger than t_c , highlighting the advantage of the cached evolution.

We note that the time t_{xQ} for evaluating each point is essentially independent of dy and dlnlnQ. If a computation is dominated by t_{xQ} , then it can be made somewhat faster by lowering the interpolation orders, at the expense of needing a finer grid (and so longer evolution times).

The timings shown here are roughly similar, for accuracies $\sim 10^{-4}$, to those obtained with the N-space code Pegasus [3] when the number of x,Q points to be evaluated is $\mathcal{O}(10^3)$. For much smaller numbers of points Pegasus becomes superior (because of the significantly smaller ratio t_c/t_{xQ}), while for much larger numbers of points HOPPET becomes better. Other NNLO evolution codes published in recent years [5, 6, 1] are generally less competitive either in terms of accuracy or speed.

To close this section, we summarise in table 3 the different parameters that are relevant in determining the accuracy of the evolution and tabulation, together with comments about the components of the timing affected by each parameter.

10 Conclusions

HOPPET is an x-space evolution code that is novel both in terms of the accuracy and speed that it provides compared to other x-space codes, and in terms of its interface, designed to provide a straightforward and physical way of manipulating PDFs beyond the built-in

Parameter	Default	Timing impact	Notes
base dy	_	t_s, t_i, t_p, t_c	Default subgrids in ratio 1:3:9:27
order	[-6]	$t_s, t_p, t_{xQ}(t_i, t_c)$	
DefaultConvolutionEps	10^{-7}	t_s	final acc. limited by \sim twice this.
du	0.1	t_i, t_p	immaterial if $\gtrsim 1.4\mathrm{dlnlnQ}$
dlnlnQ	$[\mathtt{dy}/4]$	t_i, t_p, t_c	
lnlnQ_order	4	t_{xQ}	
DefaultCouplingDt	0.2	t_{lpha}	default sufficient for $\epsilon \sim 10^{-9}$

Table 3: Parameters involved in the accuracy of a tabulated evolution. Default values shown in square brackets are to be specified by hand in the F95 interface, but are automatically set in the simpler of the initialisation calls with the streamlined interface.

task of DGLAP evolution.

Features that might be envisaged for future releases include DIS coefficient functions, full support for the DIS factorisation scheme, and the addition of time-like evolution, relevant for phenomenological fits to fragmentation functions as in [36]. In principle, the information presented here is sufficient to allow a user to implement the coefficient functions themselves, while the DIS scheme and timelike evolution would require somewhat more knowledge of the internals of the program.

More ambitious possible extensions cover a wide range of physics. Just within QCD, a general physical feature absent from mainstream PDF evolution codes is that of evolution that includes matching with various types of resummed calculations. Although studies in this direction have already been performed, both for small x resummations, as in [34] and for large x resummation, as in [37], no general public code exists which performs a matching between resummed and fixed (NLO, NNLO) order splitting functions, either in the time-like case or in the space-like case.

Another interesting extension of HOPPET would be to implement a more general mass treatment of heavy quarks. A proper treatment of heavy quark mass effects is required to obtain a good description of heavy flavour structure function as measured in HERA. Although there are by now several studies of the effect of heavy quark masses in global analysis of PDFs [38, 39], which show sizable effects on predictions for LHC observables, there does not exist right now a public code were this General Mass heavy quark schemes are implemented.

Also of interest are non-QCD effects. Evolutions with QED radiation have been presented in [5, 40], however so far no public code exists for evolution including both QCD and electroweak (EW) effects [41, 42]. This is of particular relevance at LHC energies, since flavour is associated with an SU(2) charge and so soft divergences (above M_W) do not cancel in the PDF evolution between real and virtual contributions, leading one to expect non-negligible effects in the flavour structure of the PDFs at high scales. The full QCD+EW evolution is a rather task complicated because of the need to include the EW flavour couplings, including the CKM matrix, and polarisation. For this kind of problem

a code such as HOPPET provides a good starting point, since it has a clean separation of the numerical and flavour aspects of evolution, and verified unpolarised and polarised evolution.

Acknowledgements

This work was initiated in the context of DIS event shape resummation and matching studies [14] with Mrinal Dasgupta. Its subsequent development into a fully-featured NNLO evolution code owes much to Andreas Vogt's regular encouragement, and his suggestions about features that would be useful to include for benchmark tests. We are grateful also to Wu-Ki Tung for comments on the documentation. This work was supported in part by grant ANR-05-JCJC-0046-01 from the French Agence Nationale de la Recherche.

A Example programs

A.1 General interface

The program below generates a subset of table 15 of the NNLO benchmark evolution in the second reference of [19]. It is to be found (in a slightly more commented form) in example_f90/tabulation_example.f90. Compilation instructions are to be found in the README file in the main directory of the release. A program that has the same functionality but in F77, using the streamlined interface of Sect. 8, is to be found as example_f77/tabulation_example.f.

```
program tabulation_example
  use hoppet_v1
  implicit none
  real(dp)
                   :: dy, ymax, quark_masses(4:6)
  integer
                   :: order, nloop, ix
                   :: grid, gdarray(4) ! holds information about the grid
  type(grid_def)
  type(dglap_holder)
                         :: dh
                                       ! holds the splitting functions
                                        ! holds the PDF tabulation
  type(pdf_table)
                         :: table
  type(running_coupling) :: coupling
  real(dp), pointer
                         :: pdf0(:,:) ! holds the initial pdf
  real(dp)
                         :: Q0, Q, pdf_at_xQ(-6:6)
  real(dp), parameter :: heralhc_xvals(9) = &
       & (/1e-5_dp, 1e-4_dp, 1e-3_dp, 1e-2_dp, 0.1_dp, 0.3_dp, 0.5_dp, 0.7_dp, 0.9_dp/)
  ! set up parameters for grid
  order = -6
  ymax = 12.0_dp
       = 0.1_dp
  ! set up the grid itself -- we use 4 nested subgrids
  call InitGridDef(gdarray(4),dy/27.0_dp, 0.2_dp, order=order)
  call InitGridDef(gdarray(3),dy/9.0_dp, 0.5_dp, order=order)
```

```
call InitGridDef(gdarray(2),dy/3.0_dp, 2.0_dp, order=order)
call InitGridDef(gdarray(1),dy,
                                         ymax , order=order)
call InitGridDef(grid,gdarray(1:4),locked=.true.)
! initialise the splitting-function holder
nloop = 3
call InitDglapHolder(grid,dh,factscheme=factscheme_MSbar,&
                            nloop=nloop,nflo=3,nfhi=6)
! initialise a PDF from the function below (must be contained,
! in a "used" module, or with an explicitly defined interface)
call AllocPDF(grid, pdf0)
pdf0 = unpolarized_dummy_pdf(xValues(grid))
Q0 = sqrt(2.0_dp)! the initial scale
! allocate and initialise the running coupling with a given
! set of quark masses (NB: charm mass just above Q0).
quark_masses(4:6) = (/1.414213563_dp, 4.5_dp, 175.0_dp/)
call InitRunningCoupling(coupling,alfas=0.35_dp,Q=Q0,nloop=nloop,&
                         quark_masses = quark_masses)
! create the tables that will contain our copy of the user's pdf
! as well as the convolutions with the pdf.
call AllocPdfTable(grid, table, Qmin=1.0_dp, Qmax=10000.0_dp, &
     & dlnlnQ = dy/4.0_dp, freeze_at_Qmin=.true.)
! add information about the nf transitions to the table (improves
! interpolation quality)
call AddNfInfoToPdfTable(table,coupling)
! create the tabulation based on the evolution of pdf0 from scale {\tt QO}
call EvolvePdfTable(table, Q0, pdf0, dh, coupling, nloop=nloop)
! alternatively "pre-evolve" so that subsequent evolutions are faster
!call PreEvolvePdfTable(table, QO, dh, coupling)
!call EvolvePdfTable(table,pdf0)
! get the value of the tabulation at some point
Q = 100.0_dp
write(6,'(a,f8.3,a)') "
                                  Evaluating PDFs at Q = ",Q," GeV"
write(6,'(a5,2a12,a14,a10,a12)') "x",&
     & "u-ubar", "d-dbar", "2(ubr+dbr)", "c+cbar", "gluon"
do ix = 1, size(heralhc_xvals)
   call EvalPdfTable_xQ(table,heralhc_xvals(ix),Q,pdf_at_xQ)
   write(6,'(es7.1,5es12.4)') heralhc_xvals(ix), &
        \& pdf_at_xQ(2)-pdf_at_xQ(-2), pdf_at_xQ(1)-pdf_at_xQ(-1), \& 
        & 2*(pdf_at_xQ(-1)+pdf_at_xQ(-2)), (pdf_at_xQ(-4)+pdf_at_xQ(4)), &
        & pdf_at_xQ(0)
end do
! some cleaning up (not strictly speaking needed, but illustrative)
call Delete(table); call Delete(pdf0); call Delete(dh)
call Delete(coupling); call Delete(grid)
```

```
contains
```

```
!-----
!! The dummy PDF suggested by Vogt as the initial condition for the
!! unpolarized evolution (as used in \protect\vrule widthOpt\protect\href{http://arxiv.org/abs/hep-ph
function unpolarized_dummy_pdf(xvals) result(pdf)
 real(dp), intent(in) :: xvals(:)
 real(dp)
                     :: pdf(size(xvals),-6:7) ! note upper bound!
 real(dp) :: uv(size(xvals)), dv(size(xvals))
 real(dp) :: ubar(size(xvals)), dbar(size(xvals))
 real(dp), parameter :: N_g = 1.7_dp, N_ls = 0.387975_dp
 real(dp), parameter :: N_uv=5.107200_dp, N_dv = 3.064320_dp
 real(dp), parameter :: N_db = half*N_ls
 pdf = zero
 !-- remember that these are all xvals*q(xvals)
 uv = N_uv * xvals**0.8_dp * (1-xvals)**3
 dv = N_dv * xvals**0.8_dp * (1-xvals)**4
 dbar = N_db * xvals**(-0.1_dp) * (1-xvals)**6
 ubar = dbar * (1-xvals)
  ! labels iflv_g, etc., come from the hoppet_v1 module
 pdf(:, iflv_g) = N_g * xvals**(-0.1_dp) * (1-xvals)**5
 pdf(:,-iflv_s) = 0.2_dp*(dbar + ubar)
 pdf(:, iflv_s) = pdf(:,-iflv_s)
 pdf(:, iflv_u) = uv + ubar
 pdf(:,-iflv_u) = ubar
 pdf(:, iflv_d) = dv + dbar
 pdf(:,-iflv_d) = dbar
end function unpolarized_dummy_pdf
```

end program tabulation_example

The expected output from the program is:

```
Evaluating PDFs at Q = 100.000 GeV 
x u-ubar d-dbar 2(ubr+dbr) c+cbar gluon 
1.0E-05 3.1907E-03 1.9532E-03 3.4732E+01 1.5875E+01 2.2012E+02 
1.0E-04 1.4023E-02 8.2749E-03 1.5617E+01 6.7244E+00 8.8804E+01 
1.0E-03 6.0019E-02 3.4519E-02 6.4173E+00 2.4494E+00 3.0404E+01 
1.0E-02 2.3244E-01 1.3000E-01 2.2778E+00 6.6746E-01 7.7912E+00 
1.0E-01 5.4993E-01 2.7035E-01 3.8526E-01 6.4466E-02 8.5266E-01 
3.0E-01 3.4622E-01 1.2833E-01 3.4600E-02 4.0134E-03 7.8898E-02 
5.0E-01 1.1868E-01 3.0811E-02 2.3198E-03 2.3752E-04 7.6398E-03 
7.0E-01 1.9486E-02 2.9901E-03 5.2352E-05 5.6038E-06 3.7080E-04 
9.0E-01 3.3522E-04 1.6933E-05 2.5735E-08 4.3368E-09 1.1721E-06
```

The file example_f90/tabulation_example.default_output contains a copy of these results, so as to allow easy comparison. The numbers correspond to evolution with variable flavour number, $\mu_F = \mu_R$, and the parametrised versions of the NNLO splitting functions

and mass threshold terms. The reader may verify that they correspond to those given in the top panel of table 15 of the second reference of [19] ($\mu_F = \mu_R$).

A.2 Streamlined interface

The program below generates exactly the same output as the previous example program, but this time using the streamlined interface introduced in Sect. 8. It is to be found in example_f90/tabulation_example_streamlined.f90. A program with same interface and same output but in F77, is to be found in example_f77/tabulation_example.f.

```
program tabulation_example_streamlined
 use hoppet_v1
 !! if using LHAPDF, rename a couple of hoppet functions which
 !! would otherwise conflict with LHAPDF
 !use hoppet_v1, EvolvePDF_hoppet => EvolvePDF, InitPDF_hoppet => InitPDF
 implicit none
 real(dp) :: dy, ymax, dlnlnQ, Qmin, Qmax, muR_Q
 real(dp) :: asQ, QOalphas, QOpdf
 real(dp) :: mc,mb,mt
 integer :: order, nloop
 !! holds information about the grid
 type(grid_def) :: grid, gdarray(4)
 !! hold results at some x, Q
 real(dp) :: Q, pdf_at_xQ(-6:6)
 real(dp), parameter :: heralhc_xvals(9) = &
      & (/1e-5_{dp}, 1e-4_{dp}, 1e-3_{dp}, 1e-2_{dp}, 0.1_{dp}, 0.3_{dp}, 0.5_{dp}, 0.7_{dp}, 0.9_{dp})
 integer :: ix
 ! set up parameters for grid
 order = -6
 ymax = 12.0_dp
       = 0.1_dp
 ! set up the grid itself -- we use 4 nested subgrids
 call InitGridDef(gdarray(4),dy/27.0_dp,0.2_dp, order=order)
 call InitGridDef(gdarray(3),dy/9.0_dp,0.5_dp, order=order)
 call InitGridDef(gdarray(2),dy/3.0_dp,2.0_dp, order=order)
 call InitGridDef(grid,gdarray(1:4),locked=.true.)
 ! Streamlined initialisation
 Qmin=1_dp
 Qmax=28000_dp
 dlnlnQ = dy/4.0_dp
 nloop = 3
 call hoppetStartExtended(ymax,dy,Qmin,Qmax,dlnlnQ,nloop,&
                order, factscheme_MSbar)
 ! Set heavy flavour scheme
 mc = 1.414213563_dp
```

```
mb = 4.5_dp
  mt = 175.0_dp
  call hoppetSetVFN(mc, mb, mt)
    ! Set parameters of running coupling
  asQ = 0.35_dp
  Q0alphas = sqrt(2.0_dp)
  muR_Q = 1.0_dp
  QOpdf = sqrt(2.0_dp) ! The initial evolution scale
  ! Normal evolution
  call hoppetEvolve(asQ, QOalphas, nloop,muR_Q,&
               LHAsub, QOpdf)
  ! Uncomment to perform cached evolution
  ! call hoppetPreEvolve(asQ, QOalphas, nloop,muR_Q,QOpdf)
  ! call hoppetCachedEvolve(LHAsub)
  ! get the value of the tabulation at some point
  Q = 100.0_dp
  write(6,'(a)')
  write(6,'(a,f8.3,a)') "
                                    Evaluating PDFs at Q = ",Q," GeV"
  write(6,'(a5,2a12,a14,a10,a12)') "x",&
       & "u-ubar", "d-dbar", "2(ubr+dbr)", "c+cbar", "gluon"
  do ix = 1, size(heralhc_xvals)
     call hoppetEval(heralhc_xvals(ix),Q,pdf_at_xQ)
     write(6,'(es7.1,5es12.4)') heralhc_xvals(ix), &
          & pdf_at_xQ(2)-pdf_at_xQ(-2), &
          & pdf_at_xQ(1)-pdf_at_xQ(-1), &
          & 2*(pdf_at_xQ(-1)+pdf_at_xQ(-2)), &
          & (pdf_at_xQ(-4)+pdf_at_xQ(4)), &
          & pdf_at_xQ(0)
  end do
contains
  subroutine LHAsub(x,Q,pdf)
    ! Same as in the previous example program
  end subroutine LHAsub
```

end program tabulation_example_streamlined

A.3 Accessing tables

As has been mentioned in Sect. 7.2, there are several ways to define, initialise and access a user defined table, for example as in the example below:

```
module external_table_module ! common location for your table
  use hoppet_v1
  implicit none
  type(pdf_table) :: table
  type(dglap_holder) :: dh
```

```
type(running_coupling) :: coupling
type(grid_def) :: grid  ! Optional
end module external_table_module
```

Note that one might need to include in the common module objects like dh or coupling, since these are required in other procedures:

```
subroutine A
   use external_table_module
   call PreEvolvePdfTable(table, Q0, dh, coupling)
end subroutine A

subroutine B
   use external_table_module
   ...
   call EvolvePdfTable(table,pdf0)
end subroutine B

subroutine C
   use external_table_module
   ...
   call EvalPdfTable_xQ(table, x, Q, pdf)
end subroutine C
```

A more detailed description of the above technique can be found in a second example program, called tabulation_example_2.f90, which is available at the example_f90 directory. It generates exactly the same output as the previous example program, however it provides an example of how to access a table from external procedures, as explained in Sect. 7.2.

B HOPPET reference guide

In this section we present the HOPPET reference guide, a summary of the most important modules in the package with the corresponding description, both the streamlined interface, Table 4 and for the general interface, Table 5.

C Initialisation of grid quantities

As has been mentioned in Sect. 4.2, there exist several ways of setting a grid quantity. In this Appendix we describe the most important methods for initialising a grid quantity, which we take to be a parton distribution.

There are a number of ways of setting a grid quantity. Suppose we have a subroutine

```
subroutine example_gluon(y,g)
  use types         !! defines "dp" (double precision) kind
  implicit none
  real(dp), intent(in) :: y
```

STREAMLINED INTERFACE

METHOD	DESCRIPTION
Initialisation	
hoppetStart(dy,nloop)	Sets up a compound grid with spacing in $\ln 1/x$ of dy at small x ,
	extending to $y = 12$ and numerical order = -5 .
	The Q range for the tabulation will be 1 GeV $< Q <$ 28 TeV,
	${\tt dlnlnQ=dy/4}$ and the factorisation scheme is $\overline{ m MS}$
hoppetStartExtended(ymax,dy,Qmin,Qmax,dlnlnQ,nloop,order,factscheme)	More general initialisation
hoppetSetFFN(fixed_nf) hoppetSetVFN(mc, mb, mt)	Set heavy flavour scheme
alphas = hoppetAlphaS(Q)	Accessing the coupling
Normal evolution	
hoppetEvolve(asQ,Q0alphas,	PDF evolution: specifies the coupling asQ at a scale Q0alphas,
nloop,muR_Q,LHAsub,Q0pdf)	the number of loops for evol., nloop,
	the ratio (muR_Q) of ren. to fact. scales.
	the name of a subroutine LHAsub with an LHAPDF-like interface
	and the scale QOpdf at which one starts the PDF evolution
	Note: LHAsub only called at scale QOpdf
hoppetEval(x,Q,f)	On return, f(-6:6) contains all flavours of the PDF set
	(multiplied by x) at the given x and Q values
Cached evolution	
hoppetPreEvolve(asQ,QOalphas, nloop, muR_Q, QOpdf)	Preparation of the cached evolution
hoppetCachedEvolve(LHAsub)	Perform cached evolution with the initial condition
	at QOpdf from a routine LHAsub with LHAPDF-like interface
	Notice LHAsub only called at scale QOpdf
hoppetEval(x,Q,f)	On return, f(-6:6) contains all flavours of the PDF set
	(multiplied by x) at the given \mathbf{x} and \mathbf{Q} values
	[as for normal evolution]

Table 4: Reference guide for the streamlined interface. Note that HOPPET should be supplied with and returns parton densities multiplied by x.

GENERAL INTERFACE

TYPES	DESCRIPTION
type(grid_def) :: grid	x-space grid definition
real(dp), pointer :: gluon(:)	Holds a 'grid quantity' (e.g. gluon PDF)
real(dp), pointer :: PDFset(:,:)	Grid representation of a (13-flavour) PDF set
type(grid_conv) :: Pgg	Convolution operator (i.e. splitting function)
type(split_mat) :: Pmat	Splitting matrix (with full flavour structure)
type(mass_threshold_mat) :: MTM_NNLO	Heavy quark mass-threshold matrix
type(dglap_holder) :: dglap_h	DGLAP holder (i.e. all splitting and mass-threshold matrices)
<pre>type(running_coupling) :: coupling</pre>	Running coupling
type(evln_operator) :: evop	Evolution operator (linked list of split & mass-threshold matrices)
type(pdf_table) :: table	PDF set tabulated in $x \& Q$

METHOD	DESCRIPTION
Initialisation	
<pre>InitGridDef(grid,dy=0.1_dp,ymax=10.0_dp,order=3)</pre>	Initialise a grid definition
<pre>InitGridDef(grid, subgrids(:), locked=.true.)</pre>	Combine subgrids into a single grid
AllocGridQuant(grid,gluon)	Allocate memory for a grid quantity (e.g. gluon PDF)
<pre>InitGridQuant(grid,gluon,example_gluon_fn)</pre>	Initialisation of a grid quantity (e.g. gluon PDF)
AllocPDF(grid,pdfset)	Allocate memory for a 13-flavour PDF set
<pre>InitPDF_LHAPDF(grid,pdfset,LHAsub,Q)</pre>	Initialisation of a (13-flavour) PDF set from LHAPDF
	type routine. Note: it only calls LHAsub at the scale Q
<pre>InitGridConv(grid,Pgg,Pgg_func) (*)</pre>	Initialisation of a convolution operator
<pre>InitDglapHolder(grid, dglap_h, factscheme, nloop) (*)</pre>	Initialisation of a dglap_holder type
<pre>InitRunningCoupling(coupling [, alfas] [, Q] [, nloop] [, fixnf] [, quark_masses]) (*)</pre>	Initialisation of a running_coupling type
AllocPdfTable(grid, table, Qmin, Qmax [, dlnlnQ] [, lnlnQ_order] [, freeze_at_Qmin]) (*)	Allocate space for a pdf_table type
Evaluation & manipulation	
EvalGridQuant(grid,gluon,y)	Evaluation of a grid quantity at $y = \ln 1/x$
Pgg.conv.gluon	Convolution of a splitting function with a (1-flav) PDF
Pmat.conv.PDFset	Convolution of a splitting matrix with a PDF set
SetToConvolution(Pab,Pac,Pcb)	Convolution of splitting functions, Pab = Pac Pcb
EvalPdfTable_yQ(table, y, Q, pdf)	Evaluate the 13 flavours, $pdf(-6:6)$, of a tabulated PDF set at y and Q
Evolution	
CopyHumanPdfToEvln(nf_lcl, pdf_human, pdf_evln)	Transform PDF set from human to evln representation
GetPdfRep(pdfset)	Check PDF set representation
EvolvePDF(dglap_h, initial_pdfset, coupling,	Evolution of an initial condition for a PDF set
Q_init,Q_end ,[, muR_Q] [, nloop] [,du])	at Q_init to Q_end
EvolvePdfTable(table, Q0, initial_pdfset, dglap_h,	Fill a table starting from an initial condition,
coupling [, muR_Q] [, nloop] [, untie_nf])	initial_pdfset, at the scale Q0

Table 5: Reference guide for the general interface. The upper table describes the main derived types defined in HOPPET. The lower table summarises some of the most relevant methods. Note that arguments between [...] are optional. For grid quantities and PDF sets the user must explicitly make memory allocation calls; in other cases (marked with a (*)), initialisation routines automatically allocate the memory. For all types, allocated memory may be freed with a call to the Delete(...) subroutine.

```
real(dp), intent(out) :: g
real(dp) :: x

x = exp(-y)
g = 1.7_dp * x**(-0.1_dp) * (1-x)**5
end subroutine example_gluon

Then we can call
call InitGridQuantSub(grid,gluon,example_gluon)
```

to initialise gluon with a representation of the return value from the subroutine example_gluon.

An alternative way is to make use of functions xValues or yValues that respectively return the x or y values of all points on the grid:

```
real(dp), pointer :: gluon,xvals
call AllocGridQuant(grid,gluon)
call AllocGridQuant(grid,xvals)
xvals = xValues(grid)
gluon = 1.7_dp * xvals**(-0.1_dp) * (1-xvals)**5
deallocate(xvals)
```

Though more laborious insofar as one has to worry about some extra allocation and deal-location, it has the advantage that one no longer has to write a separate subroutine.

Finally, there is an option to initialise a multi-flavour PDF grid with a subroutine with the same format as evolvePDF from the LHAPDF library. This option works as follows:

D NNLO splitting functions

A remark concerning NNLO splitting functions: the exact NNLO splitting functions derived by Moch, Vermaseren and Vogt [21, 22] involve long (multi-page) expressions in terms of harmonic polylogarithms of up to weight 4. Very conveniently, refs. [21, 22] provide the expressions directly in terms of Fortran code. The harmonic polylogarithms can be evaluated using the hplog package of Gehrmann and Remiddi [43], a copy of which is included with the HOPPET package.

The initial integrations needed to create the split_mat objects for the exact NNLO splitting functions for the full range of n_f take of the order of minutes. Since currently there is no option of storing the splitting matrices in a file, this can be a bit bothersome. So instead, by default, the program uses the approximate, parametrised NNLO splitting functions also provided in [21, 22]. The parametrised splitting functions are guaranteed to be accurate to within 0.1% — in practice since they come in relatively suppressed by two powers of α_s , the impact on the evolution tends to be of the order of a 10^{-5} relative effect [19].

The user can choose whether to obtain the exact or parametrised NNLO splitting functions using the following calls (to be made before initialising the splitting matrices)

```
integer :: splitting_variant
call dglap_Set_nnlo_splitting(splitting_variant)
```

with the following variants defined (as integer parameters) in the module dglap_choices:

The last 3 are the parametrisations based on fits to reduced moment information carried out in [30, 31]. Though at the time they represented a valuable (and much used) step on the way to full NNLO results, nowadays their interest is mainly historical.

Note that only for the nnlo_splitting_exact can the colour constants be varied (with the caveat about $d^{abc}d_{abc}$, as is described in Sect. 5.3.1). For the other options the NNLO splitting functions have been computed using the QCD values for the colour factors.

E Useful tips on Fortran 95

As Fortran 95's use in high-energy physics is not as widespread as that of other languages such as Fortran 77 and C++, it is useful to summarise some key novelties compared to Fortran 77, as well as some points that might otherwise cause confusion. For further information the reader is referred both to books about the language such as [44] and to web resources [45].

Free form. Most of the code in the HOPPET package is in free-form. The standard extension for free-form form files is .f90. There is no requirement to leave 6 blank spaces before every line and lines can consist of up to 132 characters. The other main difference relative to f77 fixed form is that to continue a line one must append an append an ampersand, &, to the line to be continued. One may optionally include an ampersand as the first non-space character of the continuation line.

For readability, many of the subprogram names in this documentation are written with capitals at the start of each word. Note however that free-form Fortran 95, like its fixed-form predecessors, is case insensitive.

Modules, and features relating to arrays. Fortran 95 allows one to package variables and subroutines into modules

The variable some_integer and the subroutine print_array are invisible to other routines unless they explicitly use the module as in the following example:

Constants can be assigned to arrays (array1) or array subsections (array2(-2:0)), arrays can be assigned to arrays of the same size (as is done for array2(-2:0)) and mathematical operations apply to each element of the array (as with the multiplication by 2).

When arrays are passed to function or subroutine that is defined in a used module, information about the size of the array is passed along with the array itself. Note however that information about the lower bound is *not* passed, so that for both array1 and array2, print_array will see arrays whose valid indices will run from 1...5. Thus the output from the program will be

```
Printing array 1 1 0 2 0 3 0 4 0
```

```
5 0
Printing array 2
1 99
2 99
3 99
4 198
5 198
```

If print_array wants array to have a different lower bound it must specify it in the declaration, for example

```
integer, intent(in) :: array(-2:) ! size is known, first element is -2
```

While it may initially seem bizarre, there are good reasons for such behaviour (for example in allowing a subroutine to manipulate multiple arrays of the same size without having to worry about whether they all have the same lower bounds).

Dynamic memory allocation, pointers. One of the major additions of f95 compared to f77 is that of dynamic memory allocation, for example with pointers

```
integer, pointer :: dynamic_array(:)
allocate(dynamic_array(-6:6))
! .. work with it ..
deallocate(dynamic_array)
```

This is fundamental to our ability to decide parameters of the PDF grid(s) at run-time. Pointers can be passed as arguments to subprograms. If the subprogram does not specify the pointer attribute for the dummy argument

```
subroutine xyz(dummy_array)
integer, intent(in) :: dummy_array(:)
```

then everything behaves as if the argument were a normal array (e.g. the default lower bound is 1). Alternatively the subroutine can specify that it expects a pointer argument

```
subroutine xyz(dummy_pointer_array)
integer, pointer :: dummy_pointer_array(:)
```

In this case the subroutine has the freedom to allocate and deallocate the array. Note also that because a pointer to the full array information is being passed, the lower bound of $dummy_pointer_array$ is now the same as in the calling routine. Though this sounds like a technicality, it is important because a corollary it that a subroutine can allocate a dummy pointer array with bounds that are passed back to the calling subroutine (we need this for the flavour dimension of PDFs, whose lower bound is most naturally -6).

Note that in contrast to C/C++ pointers, F95 pointers do not explicitly need to be dereferenced — in this respect they are more like C++ references. To associate a pointer with an object, one uses the \Rightarrow syntax:

```
integer, target :: target_object(10)
integer, pointer :: pointer_to_object(:)
pointer_to_object => target_object
pointer_to_object(1:10) = 0     ! sets target_object(1:10)
```

One notes that the object that was pointed to had the target attribute — this is mandatory (unless the object is itself a pointer).

Derived types. Another feature of F95 that has been heavily used is that of derived types (analogous to C's struct):

```
type pair
  integer first, second
end type pair
```

Variables of this type can then be created and used as follows

```
type(pair) :: pair_object, another_pair_object
pair_object%first = 1
pair_object%second = 2
another_pair_object = pair_object
print *, another_pair_object%second
```

where one sees that the entirety of the object can be copied with the assignment (=) operator. Note that many of the derived types used in HOPPET contain pointers and when such a derived type object is copied, the copy's pointer just points to the same memory as the original object's pointer. This is sometimes what you want, but on other occasions will give unexpected behaviour: for example splitting function types are derived types containing pointers, so when you assign one splitting function object to another, they end up referring to the same memory, so if you multiply one of them by a constant, the other one will also be modified.

Operator overloading While assignment behaves more or less as expected by default with derived types (it can actually be modified if one wants to), other operators do not have default definitions. So if one wants to define, say, a multiplication of objects one may associate a function with a given operator, using an interface block:

```
module test_module
                               ! provide access to dot_pairs through
  interface operator(*)
   module procedure dot_pairs ! the normal multiplication symbol
  end interface
  interface operator(.dot.)
                              ! provide access to dot_pairs through
   module procedure dot_pairs ! a specially named operator
  end interface
contains
  integer function dot_pairs(pair1, pair2)
    type(pair), intent(in) :: pair1, pair2
   dot_pairs = pair1%first*pair2%first + pair1%second*pair2%second
  end function dot_pairs
end module
given which we can then write
  integer
            :: i
  type(pair) :: pair1, pair2
  [... some code to set up pair values ...]
```

```
! now multiply them
i = pair1 * pair2
i = pair1 .dot. pair2 ! equivalent to previous statement
```

Since the multiplication operator (*) already exists for all the default types, by defining it for a new type we have *overloaded* it. Note that there are some subtleties with precedences of user-defined operators: operators (like *) that already exist have the same precedence as they have is usual operators; operators that do not exist by default (.dot) have the lowest possible preference, so, given the above definitions,

```
i = 2 + pair1 * pair2     ! legal
i = 2 + pair1 .dot. pair2    ! illegal, means: (2+pair1).dot.pair2
i = 2 + (pair1 .dot. pair2) ! legal
```

where the second line is illegal because we have not defined any operator for adding an integer and a pair. Similarly care is needed when using the HOPPET's operator .conv..

Floating point precision: A final point concerns floating point variable types. Throughout we have used definitions such as

```
real(dp), pointer :: pdf(:,:)
and written numbers with a trailing _dp
param = 1.7_dp
```

Here dp is an integer parameter (defined in the types module and accessible also through the hoppet_v1 module), which specifies the kind of real that we want to define, specifically double precision. We could also have written double precision everywhere, but this is less compact, and the use of a kind parameter has the advantage that we can just modify its definition in one point in the program and the precision will be modified everywhere. (Well, almost, since some special functions are written in Fortran 77 using double precision declarations and do their numerics based on the assumption that that truly is the type they're dealing with).

Optional and keyword arguments A feature of F95 that helps simplify user interfaces is that of optional and keyword arguments. Suppose we have

```
subroutine hello(name, prefix, count)
  character(len=*), intent(in) :: name, prefix
  integer, optional, intent(in) :: count
end subroutine hello
```

Here the count argument is optional meaning that it need not be supplied — if it is absent the subroutine is should behave sensibly all the same. Thus one can call the subroutine as

```
call hello(name, prefix)
call hello(name, prefix, count)
```

Keyword arguments are useful if one doesn't want to remember the exact order of a long list of arguments (or if one wants to specify just one of several optional arguments). For example

```
call hello(name=name, prefix=prefix)
call hello(prefix=prefix, name=name)
will do the same thing.
```

References

- [1] M. Botje, QCDNUM, http://www.nikhef.nl/~h24/qcdnum/.
- [2] L. Schoeffel, Nucl. Instrum. Meth. A **423** (1999) 439. See also http://www.desy.de/~schoffel/L_qcd98.html, http://www-spht.cea.fr/pisp/gelis/Soft/DGLAP/index.html
- [3] A. Vogt, Comput. Phys. Commun. **170** (2005) 65 [arXiv:hep-ph/0408244].
- [4] C. Pascaud and F. Zomer, arXiv:hep-ph/0104013.
- [5] S. Weinzierl, Comput. Phys. Commun. 148 (2002) 314 [arXiv:hep-ph/0203112];
 M. Roth and S. Weinzierl, Phys. Lett. B 590 (2004) 190 [arXiv:hep-ph/0403200].
- [6] A. Cafarella and C. Coriano, Comput. Phys. Commun. 160 (2004) 213 [arXiv:hep-ph/0311313]; A. Cafarella, C. Coriano' and M. Guzzi, Nucl. Phys. B 748 (2006) 253 [arXiv:hep-ph/0512358]; A. Cafarella, C. Coriano and M. Guzzi, arXiv:0803.0462 [hep-ph].
- [7] M. Guzzi, Ph.D. Thesis, Lecce University, 2006 [hep-ph/0612355].
- [8] L. Del Debbio, S. Forte, J. I. Latorre, A. Piccione and J. Rojo [NNPDF Collaboration], JHEP **0703** (2007) 039 [arXiv:hep-ph/0701127].
- [9] D. A. Kosower, Nucl. Phys. B **506** (1997) 439 [arXiv:hep-ph/9706213].
- [10] P. G. Ratcliffe, Phys. Rev. D 63, 116004 (2001) [arXiv:hep-ph/0012376].
- [11] V.N. Gribov and L.N. Lipatov, Sov. J. Nucl. Phys. 15 (1972) 438; G. Altarelli and G. Parisi, Nucl. Phys. B 126 (1977) 298; Yu.L. Dokshitzer, Sov. Phys. JETP 46 (1977) 641.
- [12] J. Pumplin, D. R. Stump, J. Huston, H. L. Lai, P. Nadolsky and W. K. Tung, JHEP 0207, 012 (2002) [arXiv:hep-ph/0201195].
- [13] A. D. Martin, R. G. Roberts, W. J. Stirling and R. S. Thorne, Phys. Lett. B **531** (2002) 216 [arXiv:hep-ph/0201127].
- [14] M. Dasgupta and G. P. Salam, Eur. Phys. J. C 24 (2002) 213 [arXiv:hep-ph/0110213];
 JHEP 0208 (2002) 032 [arXiv:hep-ph/0208073].

- [15] A. Banfi, G. P. Salam and G. Zanderighi, JHEP **0503**, 073 (2005) [arXiv:hep-ph/0407286]; JHEP **0408**, 062 (2004) [arXiv:hep-ph/0407287].
- [16] M. Ciafaloni, D. Colferai, G. P. Salam and A. M. Stasto, Phys. Rev. D 68, 114003 (2003) [arXiv:hep-ph/0307188].
- [17] T. Carli, G. P. Salam and F. Siegert, :hep-ph/0510324; T. Carli, D. Clements, et al., in preparation.
- [18] A. Banfi, G. P. Salam and G. Zanderighi, JHEP 0707 (2007) 026 [arXiv:0704.2999 [hep-ph]].
- [19] W. Giele et al., "Les Houches 2001, the QCD/SM working group: Summary report," hep-ph/0204316, section 1.3;
 M. Dittmar et al., "Parton distributions: Summary report for the HERA-LHC workshop," hep-ph/0511119, section 4.4.
- [20] W. Giele and M. R. Whalley, http://hepforge.cedar.ac.uk/lhapdf/
- [21] S. Moch, J. A. M. Vermaseren and A. Vogt, Nucl. Phys. B **688** (2004) 101 [arXiv:hep-ph/0403192].
- [22] A. Vogt, S. Moch and J. A. M. Vermaseren, Nucl. Phys. B **691** (2004) 129 [arXiv:hep-ph/0404111].
- [23] Yu. L. Dokshitzer, G. Marchesini and G. P. Salam, Phys. Lett. B **634**, 504 (2006) [arXiv:hep-ph/0511302].
- [24] A. Mitov, S. Moch and A. Vogt, Phys. Lett. B **638** (2006) 61 [arXiv:hep-ph/0604053].
- [25] B. Basso and G. P. Korchemsky, Nucl. Phys. B **775** (2007) 1 [arXiv:hep-th/0612247].
- [26] Yu. L. Dokshitzer and G. Marchesini, Phys. Lett. B **646** (2007) 189 [arXiv:hep-th/0612248].
- [27] M. Beccaria, Yu. L. Dokshitzer and G. Marchesini, Phys. Lett. B 652 (2007) 194 [arXiv:0705.2639 [hep-th]].
- [28] M. Buza, Y. Matiounine, J. Smith, R. Migneron and W. L. van Neerven, Nucl. Phys. B 472, 611 (1996) [arXiv:hep-ph/9601302];
 M. Buza, Y. Matiounine, J. Smith and W. L. van Neerven, Eur. Phys. J. C 1, 301 (1998) [arXiv:hep-ph/9612398].
- [29] K. G. Chetyrkin, B. A. Kniehl and M. Steinhauser, Phys. Rev. Lett. 79, 2184 (1997) [arXiv:hep-ph/9706430].
- [30] W. L. van Neerven and A. Vogt, Nucl. Phys. B **568** (2000) 263 [arXiv:hep-ph/9907472].

- [31] W. L. van Neerven and A. Vogt, Nucl. Phys. B **588** (2000) 345 [arXiv:hep-ph/0006154].
- [32] Press et al., Numerical Recipes in Fortran 90, Cambridge University Press, 1996.
- [33] A. Vogt, private communication.
- [34] C. D. White and R. S. Thorne, Eur. Phys. J. C 45 (2006) 179 [arXiv:hep-ph/0507244].
- [35] S. Bethke, Prog. Part. Nucl. Phys. **58**, 351 (2007) [arXiv:hep-ex/0606035].
- [36] D. de Florian, R. Sassot and M. Stratmann, Phys. Rev. D **76**, 074033 (2007) [arXiv:0707.1506 [hep-ph]].
- [37] G. Corcella and L. Magnea, Phys. Rev. D 72 (2005) 074017 [arXiv:hep-ph/0506278].
- [38] A. D. Martin, W. J. Stirling, R. S. Thorne and G. Watt, Phys. Lett. B **652**, 292 (2007) [arXiv:0706.0459 [hep-ph]].
- [39] W. K. Tung, H. L. Lai, A. Belyaev, J. Pumplin, D. Stump and C. P. Yuan, JHEP 0702, 053 (2007) [arXiv:hep-ph/0611254].
- [40] A. D. Martin, R. G. Roberts, W. J. Stirling and R. S. Thorne, Eur. Phys. J. C 39, 155 (2005) [arXiv:hep-ph/0411040].
- [41] M. Ciafaloni, P. Ciafaloni and D. Comelli, Phys. Rev. Lett. **84**, 4810 (2000) [arXiv:hep-ph/0001142].
- [42] P. Ciafaloni and D. Comelli, JHEP 0511, 022 (2005) [arXiv:hep-ph/0505047].
- [43] T. Gehrmann and E. Remiddi, Comput. Phys. Commun. 144 (2002) 200.
- [44] M. Metcalf and J. Reid, Fortran 90/95 Explained, Oxford University Press, 1996.
- [45] Many introductions and tutorials about fortran 90 may be found at http://dmoz.org/Computers/Programming/Languages/Fortran/Tutorials/Fortran_90_and_95/