

*** This manuscript has been accepted for publication in IET Networks.**

Towards an Efficient Anomaly-Based Intrusion Detection for Software-Defined Networks.

Majd Latah^{1*}, Levent Toker²

¹ Department of Computer Science, Ozyegin University, 34794, Cekmekoy, Istanbul, Turkey

² Department of Computer Engineering, Ege University, 35100, Bornova, Izmir, Turkey

*majd.latah@ozu.edu.tr; levent.toker@ege.edu.tr

Abstract: Software-defined networking (SDN) is a new paradigm that allows developing more flexible network applications. SDN controller, which represents a centralized controlling point, is responsible for running various network applications as well as maintaining different network services and functionalities. Choosing an efficient intrusion detection system helps in reducing the overhead of the running controller and creates a more secure network. In this study, we investigate the performance of the well-known anomaly-based intrusion detection approaches in terms of accuracy, false alarm rate, precision, recall, f1-measure, area under ROC curve, execution time and Mc Nemar's test. Precisely, we focus on supervised machine-learning approaches where we use the following classifiers: Decision Trees (DT), Extreme Learning Machine (ELM), Naive Bayes (NB), Linear Discriminant Analysis (LDA), Neural Networks (NN), Support Vector Machines (SVM), Random Forest (RT), K Nearest-Neighbour (KNN), AdaBoost, RUSBoost, LogitBoost and BaggingTrees where we employ the well-known NSL-KDD benchmark dataset to compare the performance of each one of these classifiers.

1. Introduction

Network security is one of the most important aspects in modern communications. Recently, programmable networks have gained popularity due to their abstracted view of the network which, in turn, provides a better understanding of the complex network operations and increases the effectiveness of the actions that should be taken in the case of any potential threat. Software Defined Networking (SDN) represents an emerging centralized network architecture, in which the forwarding elements are being managed by a central unit, called an SDN controller, which has the ability to obtain traffic statistics from each forwarding element in order to take the appropriate action required for preventing any malicious behavior or abusing of the network. At the same time, the SDN controller uses a programmable network protocol, which is OpenFlow (OF) protocol, in order to communicate and forward its decisions to OF-enabled switches [1].

In spite of the significant impact of using a centralized controller, the controller itself creates a single point of failure, which makes the network more vulnerable compared with the conventional network architecture [2]. On the other hand, the existence of a communication between the OF-enabled switches and the controller opens the door for various attacks such Denial of Service (DoS) [3], Host Location Hijacking and Man in the Middle (MIM) attacks [4]. Therefore, in order to develop an efficient Intrusion Detection System (IDS) for SDNs, the system should be able to make intelligent and real time decisions. Commonly, an IDS designed for SDNs works on the top of the controller, which forms an additional burden on the controller itself. Thus, designing a lightweight IDS is considered advantageous, since it helps in effectively detecting of any potential attacks as well as performing other fundamental network operations such as routing and load balancing in a more flexible manner. Scalability, is also an important factor, which should be taken into consideration

during the designing stage of the system [4]. There are two main groups of intrusion detection systems: signature-based IDS and anomaly-based IDS. Signature-based IDS searches for defined patterns within the analyzed network traffic. On the other hand, an anomaly-based IDS can estimate and predict the behavior of system. A signature-based IDS shows a good performance only for specified well-known attacks. On the contrary, anomaly-based IDS enjoys ability to detect unseen intrusion events, which is an important advantage for detecting zero day attacks [5].

Anomaly-based IDS can be grouped into three main categories [5]: statistical-based approaches, knowledge-based approaches, and machine learning-based approaches. In this study, we focus on machine learning-based approaches. Machine learning techniques can be categorized into four categories: (i) supervised techniques, (ii) semi-supervised techniques, (iii) unsupervised techniques and (iv) reinforcement techniques. In this paper, we investigate various supervised learning techniques with respect to their accuracy, false alarm rate, precision, recall, f1-measure, area under ROC curve, Mc Nemar's test and time taken to train and test each classifier.

2. Related work

Previous research efforts for providing a detailed analysis of supervised machine learning techniques used for intrusion detection are summarized in Table 1. These studies focused on training and testing different machine learning approaches using standard intrusion detection datasets. However, obtaining all these features from an SDN controller could be computationally expensive. Therefore, we have two possible choices: either using a subset of these standard datasets [6] or extracting new features based on network traces of standard datasets or statistics provided by the controller [7]. In this study, we use a subset of features extracted from NSL-KDD dataset based on employing the well-known Principal Components Analysis (PCA) approach

and considering the following supervised machine learning approaches: Decision Trees (DT), Extreme Learning Machine (ELM), Naive Bayes (NB), Linear Discriminant Analysis (LDA), Neural Networks (NN), Support Vector Machines (SVM), Random Forest (RT), Nearest-Neighbor (KNN), AdaBoost, RUSBoost, LogitBoost and BaggingTrees. As mentioned before, for performance measurement, we use accuracy, false alarm rate, precision, recall, f1-measure and area under ROC curve, as well as time taken to train and test each one of these classifiers. Furthermore, we use Mc Nemar’s test in order to statistically demonstrate that a significant increase has been achieved by an algorithm over the other one.

Table 1 Overview of previous supervised machine learning studies for intrusion detection

Ref.	Year	Algorithms	Dataset
[8]	2005	C 4.5 K-nearest neighbor Multi-layer perceptron Regularized discriminant analysis Fisher linear discriminant Support vector machines	KDD CUP’99
[9]	2007	Decision Trees Random Forest Naive Bayes Gaussian classifier	KDD CUP’99
[10]	2009	J48 Naive Bayes (NB) NB Tree Random Forest Random Tree Multi-layer perceptron (MLP) SVM	NSL-KDD
[11]	2010	Discriminative multinomial Naive Bayes classifiers	NSL-KDD
[12]	2013	Principal component analysis based feature selection, Genetic algorithm based detector generation, J48, NB, MLP, BF-Tree, NB- Tree, RF Tree.	NSL-KDD
[13]	2013	Correlation based feature selection and consistency based filtering, ADTree, C4.5, J48graft, LADTree, NBTree, RandomTree, RandomForest, REPTree	NSL-KDD
[14]	2013	J48, BayesNet, Logistic, SGD, IBK, JRip, PART, Random Forest, Random Tree and REPTree	NSL-KDD
[15]	2015	Neural Networks	NSL-KDD
[16]	2016	Logistic Regression Gaussian Naive Bayes SVM and Random Forest	NSL-KDD

3. Dataset

As mentioned earlier, in this study we use NSL-KDD dataset. NSL-KDD is an improved version of KDD Cup99 dataset, which suffers from huge number of redundant records [10]. Both KDD Cup99 and NSL-KDD datasets include the features shown in Table 2. It is worth mentioning that these features fall into four different categories as described in Table 3.

Table 2 List of features of KDD Cup ’99 dataset.

F. #	Feature name.	F. #	Feature name.	F. #	Feature name.
F1	Duration	F15	Su attempted	F29	Same srv rate
F2	Protocol type	F16	Num root	F30	Diff srv rate
F3	Service	F17	Num file creations	F31	Srv diff host rate
F4	Flag	F18	Num shells	F32	Dst host count
F5	Source bytes	F19	Num access files	F33	Dst host srv count
F6	Destination bytes	F20	Num outbound cmds	F34	Dst host same srv rate
F7	Land	F21	Is host login	F35	Dst host diff srv rate
F8	Wrong fragment	F22	Is guest login	F36	Dst host same src port rate
F9	Urgent	F23	Count	F37	Dst host srv diff host rate
F10	Hot	F24	Srv count	F38	Dst host serror rate
F11	Number failed logins	F25	Serror rate	F39	Dst host srv serror rate
F12	Logged in	F26	Srv serror rate	F40	Dst host rerror rate
F13	Num compromised	F27	Rerror rate	F41	Dst host srv rerror rate
F14	Root shell	F28	Srv rerror rate	F42	Class label rate

Table 3 List of feature categories presented in NSL-KDD dataset

Category	Features
Basic features	F1,F2,F3,F4,F5,F6,F7,F8,F9,F10
Content features	F11,F12,F13,F14,F15,F16,F17,F18 F19,F20,F21,F22
Time-based features	F23,F24,F25,F26,F27,F28,F29,F30,F31
Host-based features	F32,F33,F34,F35,F36,F37,F38,F39,F40 F41

As shown in Table 4, NSL-KDD includes a total of 39 attacks where each one of them is classified into one of the following four categories (DoS, R2L, U2R, Probe). Moreover, a set of these attacks is introduced only in the testing set. These new attacks are indicated in bold font.

Table 4 List of attacks presented in NSL-KDD dataset

Attack category	Attack name
Denial of service (DoS)	Apache2 , Smurf, Neptune, Back, Teardrop, Pod, Land, Mailbomb , Processtable , UDPstorm
Remote to local (R2L)	WareZClient, Guess_Password, WareZMaster, Imap, Ftp_Write, Named , MultiHop, Phf, Spy, Sendmail , SnmppGetAttack , SnmppGuess , Worm , Xsnoop , Xlock
User to root (U2R)	Buffer_Overflow, Httptuneel , Rootkit, LoadModule, Perl, Xterm , Ps , SQLlattack
Probe	Satan, Saint , Ipsweep, Portswep, Nmap, Mscan

In addition, Table 5 shows the distribution of the normal and attack records in NSL-KDD training and testing sets.

Table 5 Distributions of attacks and normal records in NSL-KDD dataset

Total Records	Normal	DoS	R2L	U2R	Probe	Total Records
KDD	125973	67343	45927	995	52	11656
Train		53.46%	36.46	0.79%	0.04%	9.25%
KDD	22544	9711	7458	2754	200	2421
Test		43.07%	33.08%	12.22%	0.89%	10.74%

4. Feature Selection

In order to increase the efficiency of SDN based intrusion detection systems we need to select the best features that can be used in SDN context. It is worth noting that the content features need to be omitted due to the fact that these features are complex to extract by a network based IDS [17]. Therefore, content features (i.e. F11 to F22) were excluded from the NSL-KDD dataset. For the remaining features we apply Principal Component Analysis (PCA) on the training set. PCA allow us to transform a large dataset into a new, smaller and uncorrelated one [18]. The standard approach of PCA can be summarized in the following 6 steps [19]:

- Find the covariance matrix of the normalized d -dimensional dataset.
- Find the eigenvectors and eigenvalues of the covariance matrix.
- Sort the eigenvalues in descending order.
- Select the k eigenvectors that correspond to the k largest eigenvalues.
- Construct the projection matrix from the k selected eigenvectors.
- Transform the original dataset to obtain a new k -dimensional feature space.

In this study, we employ PCA in the following steps:

- First, we extract the features with the largest coefficients from the principal components.
- Second, we select the k eigenvectors that correspond to the k largest eigenvalues.
- Third, we transform the original dataset with corresponding features using the projection matrix from the k selected eigenvectors.
- Finally, we validate the performance of the selected features and corresponding k component by applying the decision tree approach on the training test.

5. Evaluation Metrics

The performance of each classifier is evaluated in terms of accuracy, False Alarm Rate (FAR), precision, recall, F1-measure, Area Under ROC Curve (AUC), execution time and Mc Nemar's test. A good IDS should achieve high level of accuracy, precision, recall and F1-measure with low false alarm rate. The accuracy is calculated by:

$$Accuracy = \frac{TP + TN}{(TP + TN + FN + FP)} \quad (1)$$

True Positives (TP) is the number of attack records correctly classified; True Negatives (TN) is the number of normal traffic records correctly classified; False Positives (FP) is the number of normal traffic records falsely classified and False

Negatives (FN) is number of attack records instances falsely classified. False alarm rate is calculated by:

$$False\ Alarm\ Rate = \frac{FP}{TN + FP} \quad (2)$$

We also calculate the precision, recall and F1-measure for each classifier where precision is calculated by:

$$Precision = \frac{TP}{TP + FP} \quad (3)$$

Recall is also calculated by:

$$Recall = \frac{TP}{TP + FN} \quad (4)$$

And F1-measure is calculated by:

$$F1 - measure = 2 \times \frac{(Precision \times Recall)}{(Precision + Recall)} \quad (5)$$

In addition, we evaluate the performance of the previously selected classifiers based on their execution time as well as the analysis of the receiver operator characteristic (ROC) curve, where the area under curve (AUC) can be used to compare each classifier with another one. The higher AUC, the better IDS. One other important metric that can be used for comparing two algorithms is Mc Nemar's test, which is a non-parametric pair-wise test shows that a statistically significant increase has been achieved by an algorithm over the other one. When z-value of Nemar's Test > 1.96 (p -value is less than 0.05), the conclusion is that there is a significant difference between the two algorithms. Z-score is used to show the confidence levels [22].

$$z = \frac{(|N_{12} - N_{21}|) - 1}{\sqrt{(N_{12} + N_{21})}} \quad (6)$$

N_{12} : represents the number of times when the first algorithm success in classification and other one fails.

N_{21} : represents the number of times when the second algorithm success in classification and the first one fails.

6. Experimental Results

The experiment is conducted on Intel i5 machine with 12 GB of RAM. As shown in Fig 1, we get the best results when selecting 9 of the top features that contribute to the all PCA's components as input, which need to be transformed to less dimensional space of the corresponding components.

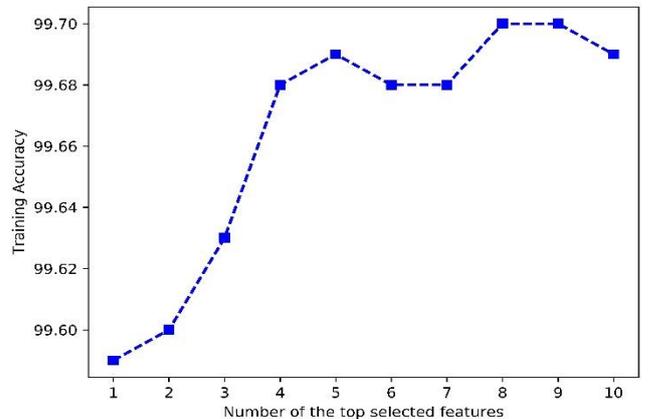


Fig. 1. The level of accuracy obtained by using top selected features

These 9 selected features are: F27, F30, F5, F23, F8, F1, F2, F39, F3. Brief description of these features is provided in Table 6.

Table 6 List of feature selected from NSL-KDD dataset

Feature	Description
F27	Percentage of connections that have REJ errors
F30	Percentage of connections to different services
F5	Number of data bytes from source to destination
F23	Number of connections to the same host as the current connection in the past two seconds
F8	Number of wrong fragments
F1	Duration of the connection in seconds
F2	Connection protocol (tcp, udp, icmp)
F39	Percentage of connections to the current host and serror rate specified service that have an S0 error
F3	Destination port mapped to service

Fig. 2, shows the level of accuracy achieved when using different number of principal components. The best results achieved with the first 10 components.

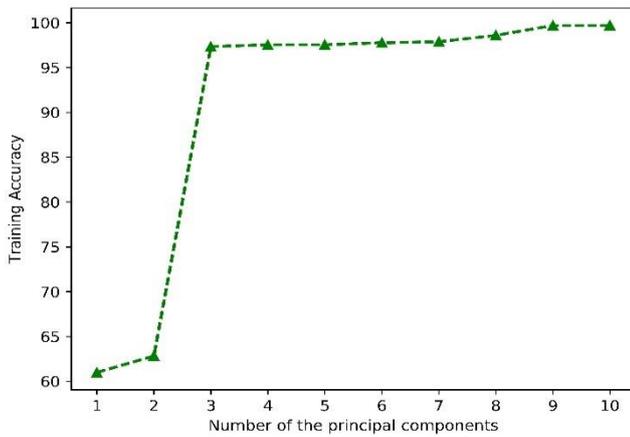


Fig. 2. The level of accuracy obtained with different number of PCA's principle components

Table 7 shows the results obtained for both training and testing stages. In terms of accuracy level, the most accurate classifiers for the training stage are: DT, RF, BaggingTrees, RUSBoost and AdaBoost with a slight difference between them. For the testing stage, however, we notice that DT approach achieved the highest level of accuracy followed by AdaBoost, RUSBoost and BaggingTrees. One can observe that ensemble methods achieved a lower false positive rate compared to DT.

Table 7 Detection accuracy and false alarm rate obtained after training and testing different supervised machine learning algorithms with 10 principle components

Method	Accuracy (%)		False Alarm Rate (%)	
	Training	Testing	Training	Testing
Naive Bayes	64.16	49.12	4.54	5.74
LDA	72.37	70.32	9.98	3.76
Linear SVM	91.04	81.40	9.21	5.92
NN	92.15	74.23	4.54	6.38
ELM	92.66	75.86	5.54	3.57
KNN	98.14	82.31	1.92	3.53
LogitBoost	98.95	84.85	0.94	2.83
AdaBoost	99.03	87.16	1.03	3.68
RUSBoost	99.19	85.57	0.96	3.59
BaggingTrees	99.33	84.03	0.81	3.51
RandomForest	99.70	80.13	0.29	3.49
Decision Tree	99.70	88.74	0.31	3.99

In terms of false alarm rate, it is worth mentioning that LogitBoost approach achieved the best results. Therefore, one can conclude that ensemble methods such AdaBoost and LogitBoost can achieve a good accuracy with low false positive rate.

From both Table 7 and Table 8, one can observe that using PCA feature selection enhanced the accuracy level for most of the classifiers in compared with using the basic features provided by the SDN controller (F1, F2, F5, F6, F23 and F24). In terms of area under ROC curve, as shown in Fig. 3 (a), we notice that DT and RF approaches achieved the best AUC for the training task followed by BaggingTrees, RUSBoost, AdaBoost and LogitBoost with slight difference between each other. Both NN and SVM had nearly the same AUC for the training task. NB, however, achieved the least training AUC.

Table 8 Detection accuracy and false alarm rate obtained after training and testing different supervised machine learning algorithms based on basic features provided by the SDN controller (i.e. features number F1, F2, F5, F6, F23 and F24).

Method	Accuracy (%)		False Positive Rate (%)	
	Training	Testing	Training	Testing
Naive Bayes	59.27	49.88	3.7227	5.14
LDA	87.57	69.36	3.26	2.24
SVM	90.86	71.00	6.55	10.27
NN	84.10	66.22	2.41	1.61
ELM	93.16	74.17	2.25	2.31
KNN	98.23	77.09	3.128	4.07
RandomForest	98.09	75.96	0	0
Decision Trees	98.37	74.43	0.306	6.43
LogitBoost	99.38	79.44	0.43	2.75
BaggingTrees	99.54	79.16	0.47	3.26
AdaBoost	99.56	78.94	0.384	2.76
RUSBoost	99.68	80.31	0.29	3.48

For the testing task, as shown in Fig. 3(b), one can observe that the best AUC obtained by DT followed by AdaBoost, RUSBoost, LogitBoost and BaggingTrees. KNN achieved a better AUC than SVM and RF. In the same context, we notice that SVM also achieved a higher AUC than ELM approach. In terms of precision and F1-measure the best results were achieved by DT, whereas LogitBoost achieved the best results in terms of recall.

Table 9 Precision, Recall, F1-measure obtained after training and testing different supervised machine learning algorithms with 10 principle components

Method	Precision (%)	Recall (%)	F1-measure (%)
Naive Bayes	14.95	77.49	25.06
LDA	50.7	94.69	66.07
Linear SVM	71.81	94.13	81.47
NN	59.56	92.5	72.46
ELM	60.29	85.71	73.98
KNN	71.59	96.41	82.17
LogitBoost	75.53	97.24	85.03
AdaBoost	80.23	96.65	87.67
RUSBoost	77.41	96.6	85.95
BaggingTrees	74.61	96.56	84.17
RandomForest	67.73	96.25	80.13
Decision Tree	83.24	96.50	89.38

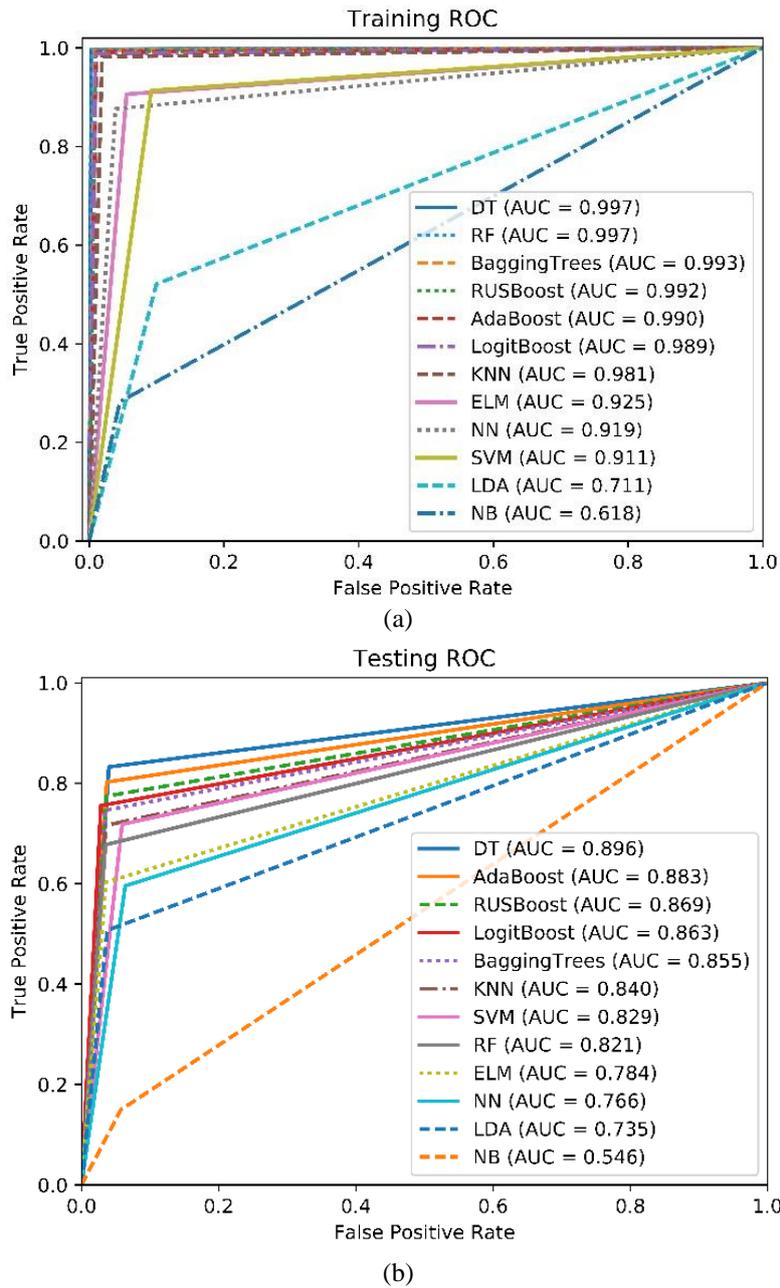


Fig. 3. ROC curve comparison for (a) training and (b) testing different supervised machine learning based IDS

Table 10 Z-score values of Mc-Nemar's Test for the supervised machine-learning algorithms used in the this study (the arrowheads \leftarrow \uparrow denote which classifier performed better). The shaded ones that larger than 1.96 indicate statistically significant differences at the confidence level of 95% ($p < 0.05$).

	NB	DT	AdaB	RUSB	LogitB	Bagging	RF	KNN	ELM	NN	SVM	LDA
NB	-											
DT	86.2 \leftarrow	-										
AdaB	88.2 \leftarrow	7.1 \uparrow	-									
RUSB	82.4 \leftarrow	19.2 \uparrow	10.3 \uparrow	-								
LogitB	86.2 \leftarrow	16.5 \uparrow	18.2 \uparrow	4.3 \uparrow	-							
Bagging	84.4 \leftarrow	20.7 \uparrow	22.1 \uparrow	9.2 \uparrow	6.4 \uparrow	-						
RF	75.0 \leftarrow	40.0 \uparrow	35.7 \uparrow	30.0 \uparrow	25.2 \uparrow	24.8 \uparrow	-					
KNN	78.1 \leftarrow	28.0 \uparrow	23.8 \uparrow	17.5 \uparrow	13.9 \uparrow	10.1 \uparrow	12.3 \leftarrow	-				
ELM	71.1 \leftarrow	42.6 \uparrow	43.2 \uparrow	38.6 \uparrow	35.6 \uparrow	33.5 \uparrow	13.1 \uparrow	29.3 \uparrow	-			
NN	64.4 \leftarrow	49.4 \uparrow	47.6 \uparrow	43.9 \uparrow	39.0 \uparrow	37.9 \uparrow	24.1 \uparrow	30.2 \uparrow	13.7 \uparrow	-		
SVM	75.5 \leftarrow	25.1 \uparrow	22.9 \uparrow	15.7 \uparrow	14.0 \uparrow	10.5 \uparrow	4.6 \uparrow	3.4 \uparrow	17.4 \uparrow	22.3 \uparrow	-	
LDA	58.5 \leftarrow	56.7 \uparrow	54.9 \uparrow	49.7 \uparrow	50.7 \uparrow	47.1 \uparrow	33.8 \uparrow	41.1 \uparrow	26.6 \uparrow	12.4 \uparrow	36.0 \uparrow	-

For Mc Nemar's test, the null hypothesis suggest that different classifiers perform similarly whereas the alternative hypothesis claims that at least one of the classifiers performs differently. As shown in Table 10, by looking at the z-score values of Mc Nemar's Test, one can conclude that DT achieved significantly better results than the other classifiers where the alternative hypothesis was accepted with a confidence level more than 99.5%. KNN also performed better than RF. AdaBoost also performed better than the other algorithms except DT, with a confidence level more than 99.5%. Bagging and boosting produced better results over other conventional machine learning methods such as KNN, ELM, NN, RF, SVM and LDA.

In terms of execution time, as shown in Fig. 4(a), we notice that NB approach achieves the best results for the training task. We excluded KNN from Fig. 4(a) due to the fact that KNN has no training time, where this algorithm employs a

distance function in order to predict the corresponding labels [20]. From Fig. 4(b), on the other hand, one can observe that ELM approach achieved the best testing time. Moreover, ELM has achieved an acceptable false alarm rate as shown in Table 7. Therefore, ELM and its improved hierarchical approach [21] can possibly be an efficient choice for SDNs.

On the other hand, in spite of the good level of accuracy for the testing stage achieved by KNN approach, it showed the worst testing time, which may indicate that KNN algorithm is not the best choice for SDNs where each controller may need to handle thousands of flows per second. A possible solution to this problem can be achieved by reducing the number of the training instance by applying an appropriate sampling method. Finally, one can observe that DT has achieved the highest level of accuracy and a good testing time in compared with the other classifiers.

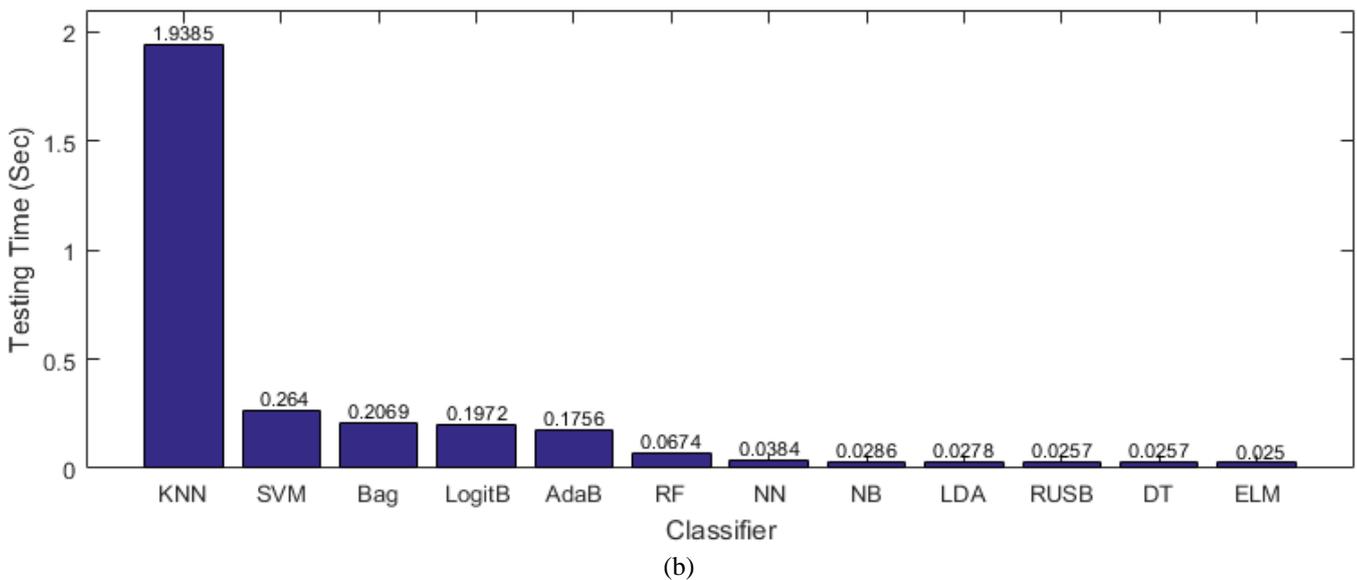
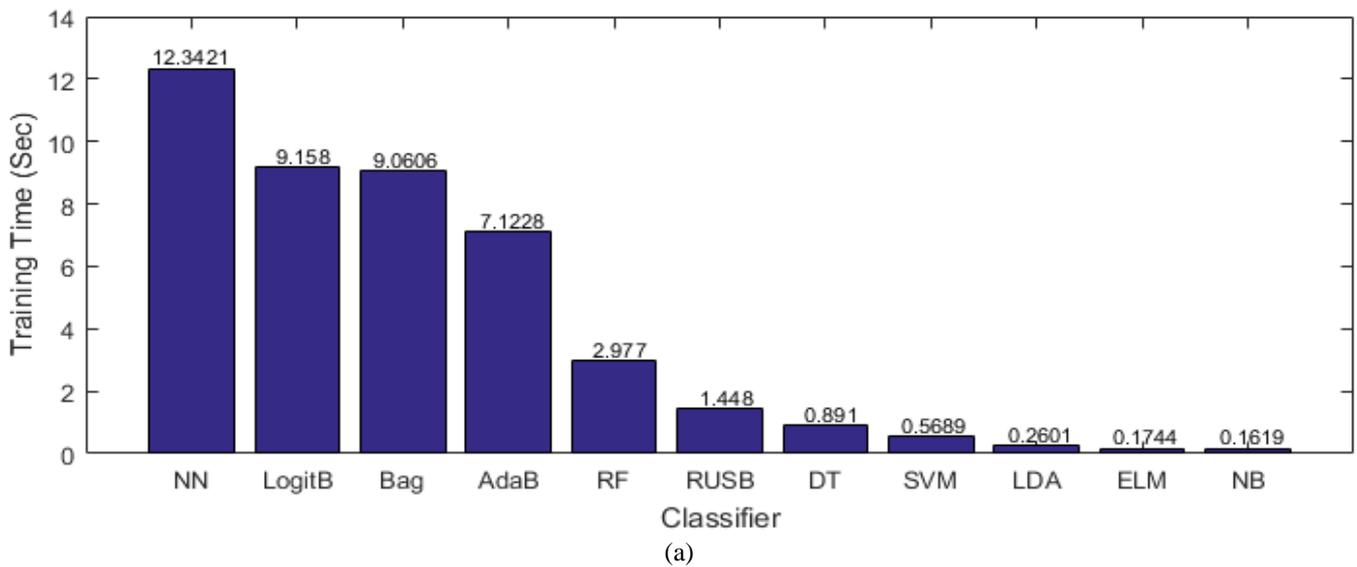


Fig. 4. Execution time for (a) training and (b) testing different supervised machine learning method

7. Conclusion

In this paper, we provide a comparative study of choosing an efficient anomaly-based intrusion detection method for SDNs. We focused on supervised machine learning approaches by using the following classifiers: NN, LDA, DT, RF, Linear SVM, KNN, NB, ELM, AdaBoost, RUSBoost, LogitBoost and BaggingTrees. In addition, we used PCA method for feature selection and dimensionality reduction. Using NSL-KDD dataset and based on our extensive experimental study, we conclude that DT approach shows the best performance in terms of accuracy, precision, F1-measure, AUC and Mc Nemar's Test. Also bagging and boosting approaches outperformed other conventional machine learning methods such as KNN, ELM, NN, RF, SVM and LDA with a confidence level more than 99.5%. Whereas in terms of false alarm rate and recall the best results achieved by LogitBoost. In terms of the execution time, ELM approach achieved the best testing time.

It is worth noting that using PCA approach was very successful in enhancing the accuracy level from 77.09% to 88.74% in compared with using the basic features provided by the SDN controller. Our future work will be focused on comparing the results obtained from this study with other machine learning approaches and exploring other flow-based features that could be used to achieve a higher level of accuracy with lower false alarm rate.

8. Acknowledgement

We would like to thank the reviewers for their insightful comments to improve the quality of this paper.

9. References

- [1] Ha, T., Kim, S., An, N., Narantuya, J., Jeong, C., Kim, J., Lim, H.: 'Suspicious traffic sampling for intrusion detection in software-defined networks', *Comput. Netw.*, 2016, 109, pp. 172-182.
- [2] AlErouda, A. and Alsmadib, I.: 'Identifying cyber-attacks on software defined networks: An inference-based intrusion detection approach', *J. Netw. Comput. Appl.*, 2017, 80, pp. 152-164.
- [3] Cui, Y., Yan, L., Li, S., Xing, H., Pan, W., Zhu, J., Zheng, X.: 'SD-Anti-DDoS: fast and efficient DDoS defense in software-defined networks', *J. Netw. Comput. Appl.*, 2016, 68, pp. 65-79.
- [4] Hong, S., Xu, L., Wang, H., Gu, G.: 'Poisoning network visibility in software-defined networks: new attacks and countermeasures'. *Proc. NDSS. 22nd Annu. Network and Distributed System Security Symposium*, California, USA, Feb 2015, pp. 1-15.
- [5] Garcia-Teodoroa, P., Diaz-Verdejoa, J. Macia'-Fernandez, G., Vazquez, E.: 'Anomaly-based network intrusion detection: Techniques, systems and challenges', *Comput. Secur.*, 2009, 28, pp. 18-28.
- [6] Tang, T. A., Mhamdi, L., McLernon, D., Zaidi, S. A. R., Ghogho, M.: 'Deep learning approach for network intrusion detection in software defined networking'. *Proc. International Conf. on Wireless Networks and Mobile Communications*, Fez, Morocco, Oct. 2016, pp. 258-263.
- [7] Braga, R., Mota, E., Passito, A.: 'Lightweight DDoS flooding attack detection using NOX/OpenFlow'. *Proc. IEEE 35th Conf. on Local Computer Networks*, Denver, USA, Oct. 2010, pp. 408-415.
- [8] Laskov, P., Düssel, P., Schäfer C., Rieck, K.: 'Learning intrusion detection: supervised or unsupervised?'. *Proc. 13th International Conf. Image Analysis and Processing-ICIAP*, Cagliari, Italy, Sept. 2005, pp. 50-57.
- [9] F. Gharibian, F., Ghorbani, A. A.: 'Comparative study of supervised machine learning techniques for intrusion detection'. *Proc. IEEE Fifth Annu. Conf. on Communication Networks and Services Research*, New Brunswick, Canada, May 2007, pp. 350-358.
- [10] Tavallae, M., Bagheri, E., Lu, W., Ghorbani, A. A.: 'A detailed analysis of the KDD CUP 99 data set'. *Proc. IEEE Symposium on Computational Intelligence for Security and Defense Applications*, Ontario, Canada, July 2009, pp. 1-6.
- [11] Panda, M., Abraham, A., Patra, M. R.: 'Discriminative multinomial naive bayes for network intrusion detection'. *Proc. IEEE Sixth International Conf. on Information Assurance and Security*, Atlanta, Canada, Aug. 2010, pp. 5-10.
- [12] Aziz, A. S. A., Hassanien, A. E., Hanaf, S. E. O., Tolba, M. F.: 'Multi-layer hybrid machine learning techniques for anomalies detection and classification approach'. *Proc. IEEE 13th International Conf. on Hybrid Intelligent Systems*, Gammarth, Tunisia, Dec. 2013, pp. 215-220.
- [13] Thaseen, S., Kumar, C. A.: 'An analysis of supervised tree based classifiers for intrusion detection system'. *Proc. IEEE International Conf. on Pattern Recognition, Informatics and Mobile Engineering*, Salem, India, Feb. 2013, pp. 294-299.
- [14] Chauhan, H., Kumar, V., Pundir, S., Pilli E. S.: 'A comparative study of classification techniques for intrusion detection'. *Proc. IEEE International Symposium on Computational and Business Intelligence*, New Delhi, India, Aug. 2013, pp. 40-43.
- [15] Ingre, B., Yadav, A.: 'Performance analysis of NSL-KDD dataset using ANN'. *Proc. IEEE International Conf. on Signal Processing and Communication Engineering Systems*, Guntur, India, Jan. 2015, pp. 92-96.
- [16] Belavagi, M. C., Muniyal, B.: 'Performance evaluation of supervised machine learning algorithms for intrusion detection'. *Proc. Twelfth International Multi-Conf. on Information Processing*, Bangalore, India, Dec. 2016, pp. 117-123.
- [17] Staudemeyer, R., Omlin, C.W.: 'Feature set reduction for automatic network intrusion detection with machine learning algorithms'. *Proc. of the southern African telecommunication networks and applications conference (SATNAC)*, Swaziland, Swaziland, Aug. 2009.
- [18] Taylor, J., King, R.D., Altmann, T. Fiehn, O.: 'Application of metabolomics to plant genotype discrimination using statistics and machine learning. *Bioinformatics*', 2002, 18, (suppl_2), pp. S241-S248.
- [19] Ikram S.T., Cherukuri A.K.: 'Improving Accuracy of Intrusion Detection Model Using PCA and Optimized SVM'. *Journal of Computing and Information Technology*, 2016, 24, pp. 133-148.
- [20] Wetschereck, D., Aha, D.W. Mohri, T.: 'A review and empirical evaluation of feature weighting methods for a class of lazy learning algorithms', *Artificial Intelligence Review*, 1997, 11, (1-5), pp. 273-314.

- [21] Tang, J., Deng, C., Huang, G.B.: 'Extreme learning machine for multilayer perceptron', IEEE T NEUR NET LEAR, 2016, 27, (4), pp. 809-821.
- [22] Bostanci, B., Bostanci, E.: 'An evaluation of classification algorithms using Mc Nemar's test'. Proc. of Seventh International Conference on Bio-Inspired Computing: Theories and Applications (BIC-TA 2012), Gwalior, India, Dec. 2012, pp. 15-26.