

Robustness of skeletons and salient features in networks

Louis M. Shekhtman^{1,*}, James P. Bagrow^{2,3}, and Dirk Brockmann²

¹Department of Physics and Astronomy, Northwestern University, Evanston, IL 60208, USA

²Department of Engineering Sciences and Applied Mathematics, Northwestern Institute on Complex Systems, Northwestern University, Evanston, IL 60208, USA

³Department of Mathematics and Statistics, Vermont Advanced Computing Center, Complex Systems Center, University of Vermont, Burlington, VT 05405, USA

*Corresponding author: lshek@u.northwestern.edu

March 6, 2022

Abstract

Real world network datasets often contain a wealth of complex topological information. In the face of these data, researchers often employ methods to extract reduced networks containing the most important structures or pathways, sometimes known as ‘skeletons’ or ‘backbones’. Numerous such methods have been developed. Yet data are often noisy or incomplete, with unknown numbers of missing or spurious links. Relatively little effort has gone into understanding how salient network extraction methods perform in the face of noisy or incomplete networks. We study this problem by comparing how the salient features extracted by two popular methods change when networks are perturbed, either by deleting nodes or links, or by randomly rewiring links. Our results indicate that simple, global statistics for skeletons can be accurately inferred even for noisy and incomplete network data, but it is crucial to have complete, reliable data to use the exact topologies of skeletons or backbones. These results also help us understand how skeletons respond to damage to the network itself, as in an attack scenario.

Keywords: mathematical and numerical analysis of networks, network stability under perturbation and duress, network percolation, centrality measures, network skeletons and backbones.

1 Introduction

Many systems consist of discrete elements that are coupled to one another in sophisticated ways. Modeling these systems as networks often exposes more clearly the fundamental properties of the dataset [1–4]. While modeling systems as networks is not a new approach, it has become more prevalent due to the greater availability of large data sets [5]. The brain’s neurons have been mapped using these methods [6], as have air traffic patterns [7], and the flow of cargo throughout the world [8].

The explosion of research on complex networks in recent years has led to the discovery of various properties of networks and has allowed us to find ways of reducing the complexity while preserving certain key features. Many of these methods focus on reducing the number of nodes in the network. Aside from simple thresholding, more sophisticated coarse-graining techniques have also been used [9] to reduce the number of distinct entities in the network. Here we will focus on methods of reducing the number of links in the network while preserving the nodes. This is advantageous since it reduces the complexity of the system while still preserving scale-free properties.

Further, there has been considerable effort in understanding how networks as a whole respond to damage [10–13]. These studies have explored different methods of perturbing the network such as intentional attack and random failure.

Despite the significant amount of research in both of these areas separately, there has been little work in combining the study of backbone and skeleton methods with stress applied to the system. Here we examine how skeletons and backbones respond to different methods of stress applied to the system.

1.1 Network data

In exploring the response of network skeletons to perturbations to the network as a whole, we use three different transportation networks, three biological networks and one network model. The transportation networks used are the world air transportation network from 1995 (Airport), the network of global cargo shipments (Cargo), and the network of human migrations provided by the IRS (Migration). The Airport network was taken from OAG Worldwide Ltd. and has been examined in various previous studies [7, 14, 15]. The Cargo network comes from the IHS Fairplay data and contains information about 16,323 container ships [8].

For biological networks we examine the network containing the neural interactions of *C. elegans* (Neural), the Florida Bay food web (Food Web), and the metabolic network of *E. coli* (Metabolic). The Neural network comes from work by White et al. [16] and was explored in [17]. The Food Web is from a collection of public data sets available online [18]. Finally, the Metabolic network comes from experimental research and has also been previously analyzed [19].

Network	N	L	$\langle k \rangle$	ρ	$CV(k)$	$CV(w)$	r
Airport	1227	18050	29.42	0.024	1.29	2.25	-0.06
Migration	3056	71551	46.83	0.015	1.94	6.13	-0.06
Cargo	951	25819	54.30	0.057	1.22	6.85	-0.14
Neural	297	2141	14.46	0.049	0.89	1.35	-0.16
Food Web	121	1763	29.14	0.24	0.45	11.77	-0.10
Metabolic	311	1304	8.39	0.027	1.79	7.91	-0.25
Random	1000	15028	30.06	0.03	0.177	1.44	-0.005

Table 1: Summary of the networks. Presented here: N , the number of nodes in the network; L , the number of links; $\langle k \rangle$, the average degree; $CV(k)$ the coefficient of variation of degree; $CV(w)$, the coefficient of variation of weight; $\rho = L/\binom{N}{2}$, the network density; and r , the degree assortativity coefficient.

Lastly, we analyze an Erdős-Rényi network with link weights drawn from a power-law distribution (Random). Basic summary statistics for the networks, such as the number of nodes N and links L , is provided in Table 1.

1.2 Skeleton methods

While there are many ways to extract the most central links, the two methods explored here are the **salience skeleton** of Grady et al. [20] and the **disparity backbone** of Serrano et al. [21]. Both of these methods involve using the weights on the network links and therefore require that the data be presented as a weighted network. Note that while the terms ‘backbone’ and ‘skeleton’ are generally synonymous, for clarity we will refer to the *salience skeleton* and *disparity backbone* for these methods.

The salience skeleton is an analysis based on the shortest path trees (SPTs) of a network and is similar to the method used by Wu et al. to find superhighways [22]. First we compute the SPT rooted at each node of the network using Dijkstra’s algorithm. The **salience** S_{ij} of edge ij is then the fraction of SPTs in which ij appears [20]:

$$S_{ij} = \frac{1}{N} \sum_{c=1}^N [(ij) \in T_c] \quad (1)$$

where T_c is the set of all edges in the SPT rooted at node c and $[P] = 1$ if statement P is true and zero otherwise. In real networks salience is distributed bimodally (Fig. 1), meaning that links occur in nearly all SPTs ($S \approx 1$) or in almost none ($S \approx 0$). This makes it a natural way of extracting a network skeleton without having to choose an arbitrary cutoff for S . Note that Eq. (1) is very similar to edge betweenness but subtly distinct in that it counts each *tree* whereas betweenness counts each *path* [20].

The disparity backbone method focuses on statistically significant deviations in link weight. One begins by defining a null model that determines the expected distribution of link weights around a node with k links, if those weights were distributed randomly between the links. The method then compares the actual link weights around the node to

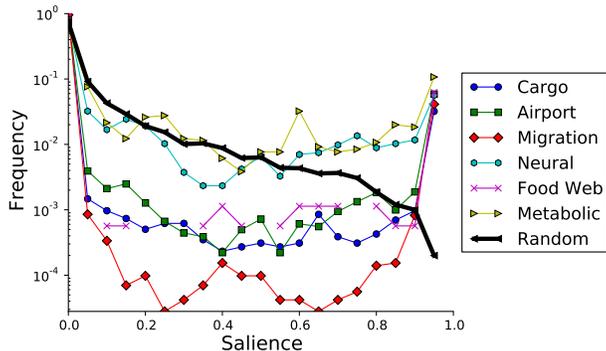


Figure 1: The salience distribution of the networks used in the analysis. For all the networks which use real data the distribution displays a bimodal characteristic. Notably, the curve of the random network does not have the same shape. Values not shown are at zero.

the null model. A significance level $\alpha \in (0, 1)$ is chosen and all links that are statistically significant at α belong to the disparity backbone [21].

1.3 Robustness methods

In perturbing the networks we explore (i) node percolation, (ii) link percolation and (iii) link switching. We define the percolation either of links or nodes by the number p_{perc} which is the fraction of links or nodes removed from the network. The classic result from percolation involves a phase transition in the size of the giant connected component (GCC) for random networks. For most real networks there is no phase transition (while $p_{\text{perc}} < 1$) and the size of the giant connected component is robust. We repeat this experiment and examine how the giant connected component changes under link percolation for our datasets. We confirm the previous results, which have shown that real networks are robust to link percolation.

There are a variety of methods of performing link rewiring and the process is somewhat subtle. We use the method introduced by Karrer et al. [23], which involves rewiring in such a way that the expectation value of the degree of each node is preserved. This is done by defining the probability of an edge, e_{ij} , existing between nodes i and j according to their degrees:

$$e_{ij} = \frac{k_i k_j}{2L}, \quad (2)$$

where k_i is the degree of node i . To rewire, we go through each edge in the network and with some probability p_s we remove that edge and insert a new edge between nodes i and j , with i and j chosen with probability e_{ij}/L . Otherwise,

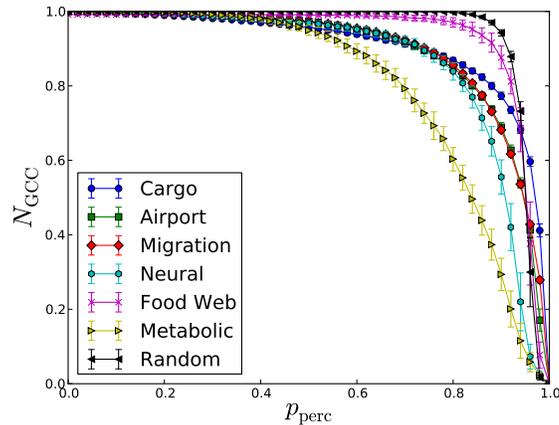


Figure 2: The giant connected component under link percolation. We observe that the fraction of nodes in the giant connected component, N_{GCC} , of the network is robust under link percolation meaning most links must be removed before the network fragments. This holds for all networks studied here.

with probability $1 - p_s$, we leave that original edge in place. Karrer et al. show that this rewiring scheme preserves the expected degree of each node in the network while allowing us to tune the quantity of randomness with the parameter p_s .

2 Results

We now study how our skeleton methods perform in the face of noisy and missing data by applying them to perturbed versions of our networks and comparing their results to those obtained for the original networks.

In the case of node percolation we observe that the size or fraction of links in the skeleton, $|S|$, is roughly proportional to N , the number of nodes in the network. This can be seen by the fact that $\frac{d|S|}{dp_{perc}} \approx -1$. For the salience skeleton this is true for all values of p_{perc} while for the disparity backbone the linear regime terminates earlier. This is shown in Fig. 3. This suggests that for the salience skeleton it is mainly the path to the removed node that is affected by the percolation while paths to other nodes may change slightly but contain about the same number of links as the original path. For the disparity backbone the decrease is faster than for the salience skeleton which shows that the size of the disparity backbone is more sensitive to the number of nodes in the network.

In examining changes to the links in the network we look at several other quantities. First the skeleton giant connected component, S_{GCC} is intuitively defined as the fraction of the network that is connected when the network is reduced to its skeleton. Second, we examine how many links are added to the skeleton, L_A , after perturbation, and how many links are deleted from the skeleton, L_D , after perturbation. The comparisons are always made to the original

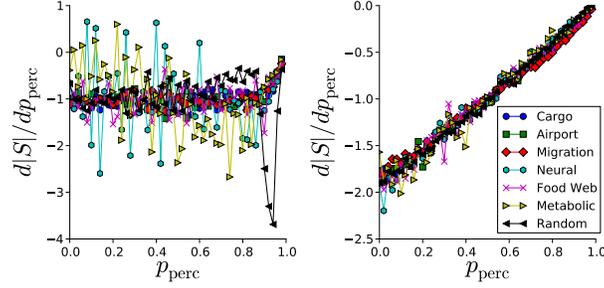


Figure 3: How site (or node) percolation changes the size of the **(left)** salience skeleton and the **(right)** disparity backbone. The linear decrease in the size of the skeleton as p_{perc} increases shows that the size of the skeleton is proportional to N , the number of nodes in the network. (The noise in the Neural and Metabolic networks is likely due to the smaller size of those networks.) Meanwhile, the disparity backbone decreases in size more quickly than the salience skeleton for $p_{\text{perc}} < 1/2$. The disparity backbone is more sensitive to site percolation than the salience skeleton, especially for small amounts of percolation.

skeleton without any perturbation.

For link percolation we observe in Fig. 4 that for the salience skeleton both the size of the skeleton and the size of the skeleton giant connected component (S_{GCC}) are robust to change. However, the plots of L_A and L_D make clear that the salience skeleton itself is undergoing significant changes. Essentially this suggests that under link percolation the salience skeleton is able to find replacement pathways and those paths are not considerably longer than the original paths. Links are being added and deleted, yet the skeleton is simply rerouted and maintains its connectivity and size.

The one exception to this is the simulated Random network which has a very fragmented skeleton. This behavior corresponds to the fact that in the Random network there is a weaker preference for shortest paths, i.e. the salience is not bimodal as shown in Fig. 1. However, after we remove a large fraction of the links each node only has a couple of links and the shortest paths all go through the same links.

To analyze this hypothesis and confirm that this is not an artifact of the specific salience cutoff value chosen (0.5), we examine the S_{GCC} of the Random network with different salience cutoff values. In Fig. 6 we observe that the S_{GCC} vs. p_{perc} curve has the same shape until the salience cutoff is very low. At that point the S_{GCC} of the Random network is also robust to percolation and increasing the amount of percolation never leads to a larger S_{GCC} . The different behavior of the Random network shows that real networks have intrinsic properties which lead the S_{GCC} to be robust under link percolation.

Meanwhile, in Fig. 5 we consider how link percolation affects the disparity backbone. The backbone size decreases, yet its giant connected component remains robust. Comparing L_A to L_D shows that many links are deleted and very few are added to compensate for those removed. We also observe that the backbone of the Random network is less robust than the backbones of the real networks, as it was for the salience skeleton.

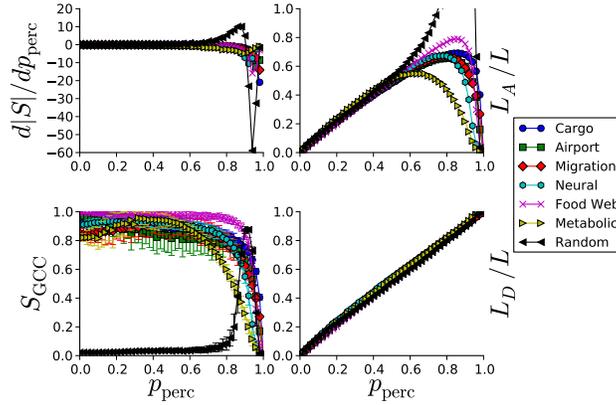


Figure 4: Changes to the salience skeleton under link percolation. **(top left)** The size of the skeleton is robust to link percolation since $\frac{d|S|}{dp_{\text{perc}}} \approx 0$ until $p_{\text{perc}} \rightarrow 1$. **(bottom left)** The giant connected component of the skeleton itself is also robust to link percolation (except in the case of the random network). This is similar to the giant component of the network as a whole which was previously shown to be robust to link percolation. **(top right)** Despite the robustness of the size of the skeleton, there are many new links that are added to the skeleton as we increase p_{perc} . **(bottom right)** Further we observe that an equivalent number of links are removed from the skeleton which leads to the lack of change in its size. This demonstrates that the skeleton performs a balancing act where removed links are compensated with new links. New shortest paths are found and these new paths contain approximately the same number of links as the old ones.

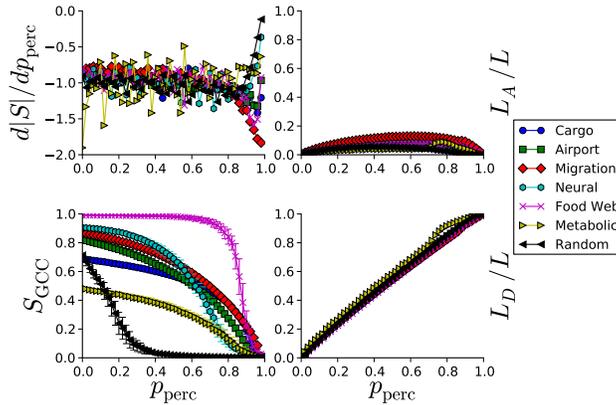


Figure 5: Changes to the disparity backbone under link percolation. **(top left)** The size of the backbone is not robust to link percolation which is in contrast to the salience skeleton. **(bottom left)** In agreement with the salience skeleton, the giant connected component of the disparity backbone is also robust to link percolation, yet not quite to the same extent. **(top right)** Relatively few links are added to the disparity backbone as links are deleted. Again, this is in contrast to the salience skeleton where enough links were added to compensate for the links deleted from the skeleton. **(bottom right)** The rate at which links are deleted from the backbone is similar to that for the salience skeleton. The main difference however is that this removal of links is not compensated for by the addition of new links.

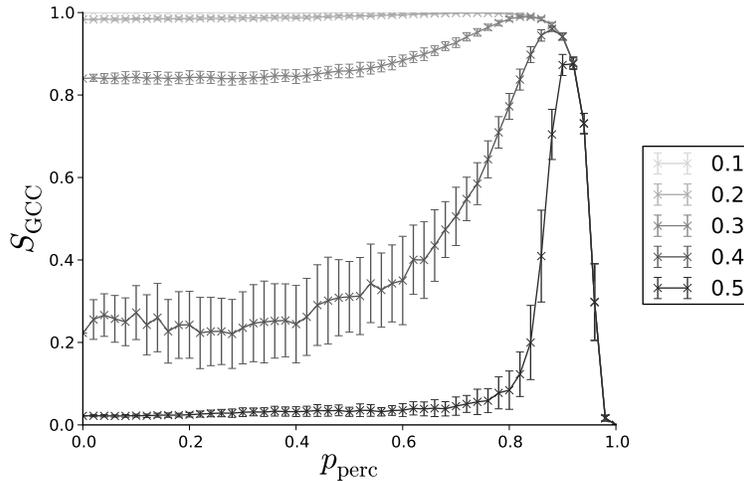


Figure 6: The skeleton giant connected component, S_{GCC} , of the Random network with different salience cutoffs. For salience cutoff values > 0.3 the S_{GCC} increases at $p_{perc} \approx .8$ and then begins decreasing at $p_{perc} \approx .95$. The unique shape of the salience distribution of the Random network leads to different cutoffs being required for robustness.

Similarly, upon switching links using the method of Karrer et al. [23], we observe that S and S_{GCC} are robust for both the salience skeleton (Fig. 7) and the disparity backbone (Fig. 8). The significant decrease and large variation in the airport network’s salience skeleton giant component is likely due to a specific, unstable hierarchical structure present in that network which, when altered, leads to fragmentation. Further work is needed to determine the exact nature of this structure. The neural network exhibits similar behavior likely due to this. The low S_{GCC} of the random network occurs for the same reason as seen under link percolation. Once again, we observe that similar to link percolation, despite the robustness of the skeleton size and giant connected component, there are significant changes in the links that actually make up the skeleton. Specifically we see large changes in L_A and L_D just as we did with link percolation.

3 Discussion

These results show that global summary statistics of skeletons, such as the size of the skeleton and the size of the skeleton giant connected component, are robust to changes in the network structure. In contrast the specific details of the skeleton, such as the exact links it contains, will vary, potentially greatly, as the network is perturbed. This suggests that while skeleton extraction methods are useful for understanding the global properties of a network, caution should be applied when attempting to understand local properties based on extraction methods.

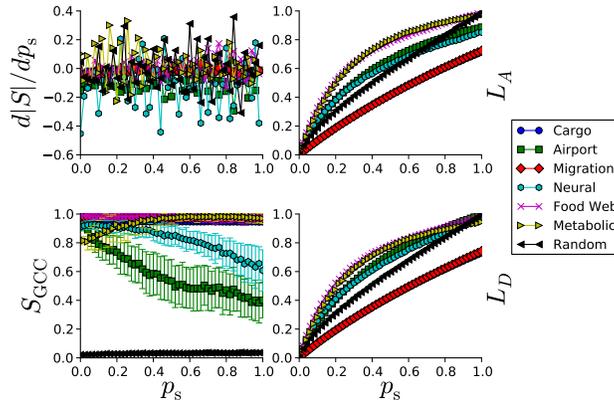


Figure 7: Changes to the salience skeleton under link switching. **(top left)** The size of the skeleton is again robust. **(bottom left)** The skeleton giant component of the migration and cargo networks is robust to link switching, yet the airport network's skeleton becomes dramatically fragmented. This is likely due to a specific, unstable hierarchical (or hub-spoke) structure present in the airport network that dictates the paths for the salience skeleton. Such a hub-spoke structure may also account for the slight decrease in the skeleton size for the neural network. **(top and bottom right)** Many links are added and removed from the skeleton, once again in a way that maintains its size. Further, this reveals that while the size of the skeleton can be determined by the number of nodes and the degree distribution, knowing which particular links will be present in the skeleton requires having the complete dataset.

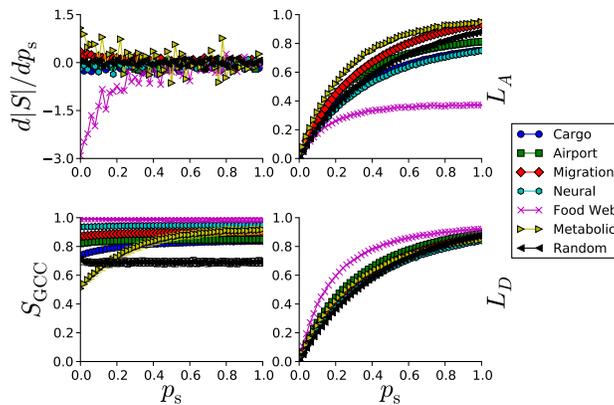


Figure 8: Changes to the disparity backbone under link switching. **(top left)** As was true for the salience skeleton under link switching and link percolation, we find the size of the disparity backbone to be robust under link switching. **(bottom left)** The giant connected component of the disparity backbone is similarly robust. **(top and bottom right)** Again there are a significant number of links added and deleted yet they once again balance to maintain the size of the skeleton.

We further showed that different methods of computing the skeleton respond quite differently under perturbation in many cases. Lastly, the response of skeletons of real networks is significantly different than the response of a random network. The methods used to compute network skeletons and backbones exploit properties of real networks and these properties are not present in the simulated network. This leads the skeleton of the random network to respond quite differently under perturbation.

An obvious application of this work is to damage or change in transportation networks, where skeletons will be responsible for carrying the majority of the system's traffic. This change often occurs in the real world scenario of transport reroutings and cancellations. The results here show that as these changes occur the specific composition of the backbone or skeleton changes significantly. Nonetheless global properties can still often be extracted from the skeleton.

A second application is in protein-protein networks. These networks often contain noisy data and are considered incomplete in the interactions they show [24,25]. Significant work to map these networks entirely and obtain a full set of all the connections present is ongoing [26]. Despite the lack of the full dataset, much analysis has already been done on the data that is available [27, 28]. Our results suggests that caution should be applied when looking at structural skeletons or backbones for many biological data sets that contain noisy data because the errors will have a profound impact on the resulting skeleton and backbone structures.

Lastly, these results have implications to temporal networks. In this case it is not that our knowledge is lacking about the network, but that the links change as time progresses [29]. Social networks often display this sort of time dependence [30] and many neural networks also change through time [31, 32]. For these networks caution must be taken before applying methods of extracting skeletons or backbones since their changing states will lead to different results.

Acknowledgments

We thank the Volkswagen Foundation for support.

References

- [1] R Albert and A. L. Barabási. Statistical mechanics of complex networks. *Reviews of Modern Physics*, 74:47–97, 2002.
- [2] R. Milo, S. Shen-Orr, S. Itzkovitz, N. Kashtan, D. Chklovskii, and A. Alon. Network motifs: Simple building blocks of complex networks. *Science*, 298:824–827, 2002.
- [3] M. E. Newman. The structure and function of complex networks. *SIAM Review*, 45:268–76, 2003.

- [4] S. Strogatz. Exploring complex networks. *Nature*, 410:268–276, 2001.
- [5] A. E. Motter and R. Albert. Networks in motion. *Physics Today*, 65:43, 2012.
- [6] E. Bullmore and O. Sporns. Complex brain networks: graph theoretical analysis of structural and functional systems. *Nature Reviews Neuroscience*, 10:186–198, 2009.
- [7] R. Guimerá, S. Mossa, A. Turtschi, and L. Amaral. The worldwide air transportation network: Anomalous centrality, community structure, and cities’ global roles. *Proc. Natl. Acad. Sci.*, 102:7794–7799, 2004.
- [8] P. Kaluza, A. Kolzsch, M. Gastner, and B. Blasius. The complex network of global cargo ship movements. *J. R. Soc.*, 7:1093–1103, 2010.
- [9] D. Gfeller and P/De Los Rios. Spectral coarse graining of complex networks. *Physical review letters*, 99:038701, 2007.
- [10] R. Albert, H. Jeong, and L. Barabási. Error and attack tolerance of complex networks. *Nature*, 406:378–382, 2000.
- [11] R. Cohen, K. Erez, D. ben Avraham, and S. Havlin. Resilience of the internet to random breakdowns. *Phys. Rev. Lett.*, 85:4626–4628, 2000.
- [12] Duncan S. Callaway, M. E. J. Newman, Steven H. Strogatz, and Duncan J. Watts. Network robustness and fragility: Percolation on random graphs. *Phys. Rev. Lett.*, 85:5468–5471, 2000.
- [13] M. E. J. Newman and D. J. Watts. Scaling and percolation in the small-world network model. *Phys. Rev. E*, 60:7332–7342, 1999.
- [14] A. Barrat, M. Barthlemy, R. Pastor-Satorras, and A. Vespignani. The architecture of complex weighted networks. *Proc. Natl. Acad. Sci.*, 101:3747–3752, 2004.
- [15] Vittoria Colizza, Alain Barrat, Marc Barthlemy, and Alessandro Vespignani. The role of the airline transportation network in the prediction and predictability of global epidemics. *Proceedings of the National Academy of Sciences of the United States of America*, 103:2015–2020, 2006.
- [16] J. G. White, E. Southgate, J. N. Thomson, and S. Brenner. The structure of the nervous system of the nematode *caenorhabditis elegans*. *Philosophical Transactions of the Royal Society of London. B, Biological Sciences*, 314:1–340, 1986.
- [17] Duncan J Watts and Steven H Strogatz. Collective dynamics of small-worldnetworks. *nature*, 393:440–442, 1998.
- [18] Robert E Ulanowicz and Donald L DeAngelis. Network analysis of trophic dynamics in south florida ecosystems. *US Geological Survey Program on the South Florida Ecosystem*, page 114, 2005.
- [19] E. Almaas, B Kovacs, T Vicsek, ZN Oltvai, and A-L Barabási. Global organization of metabolic fluxes in the bacterium *escherichia coli*. *Nature*, 427:839–843, 2004.
- [20] D. Grady, C. Thiemann, and D. Brockmann. Robust classification of salient links in complex networks. *Nat Commun*, 3, 2012.
- [21] M. Serrano, M. Boguñá, and A. Vespignani. Extracting the multiscale backbone of complex weighted networks. *Proc. Natl. Acad. Sci.*, 106, 2009.
- [22] Z. Wu, L. Braunstein, S. Havlin, and H. Stanley. Transport in weighted networks: Partition into superhighways and roads. *Physical review letters*, 96:148702, 2006.
- [23] Brian Karrer, Elizaveta Levina, and M. E. J. Newman. Robustness of community structure in networks. *Phys. Rev. E*, 77:046119, Apr 2008.

- [24] R. Jansen, H. Yu, D. Greenbaum, Y. Kluger, N. Krogan, S. Chung, A. Emili, M. Snyder, J. Greenblatt, and M. Gerstein. A bayesian networks approach for predicting protein protein interactions from genomic data. *Science*, 302:449–453, 2003.
- [25] C. von Mering, R. Krause, B. Snel, M. Cornell, S. Oliver, S. Fields, and P. Bork. Comparative assessment of large scale data sets of protein protein interactions. *Nature*, 417:399–403, 2002.
- [26] Amy Hin Yan Tong, Guillaume Lesage, Gary D Bader, Huiming Ding, Hong Xu, Xiaofeng Xin, James Young, Gabriel F Berriz, Renee L Brost, Michael Chang, et al. Global mapping of the yeast genetic interaction network.
- [27] D. Bu, Y. Zhao, L. Cai, H. Xue, X. Zhu, H. Lu, J. Zhang, S. Sun, L. Ling, N. Zhang, et al. Topological structure analysis of the protein protein interaction network in budding yeast. *Nucleic Acids Research*, 31:2443–2450, 2003.
- [28] J. J. Han, N. Bertin, T. Hao, D. S. Goldberg, G. F. Berriz, L. V. Zhang, D. Dupuy, A. Walhout, M. E. Cusick, F. P. Roth, et al. Evidence for dynamically organized modularity in the yeast protein protein interaction network. *Program in Gene Function and Expression Publications and Presentations*, page 19, 2004.
- [29] Petter Holme and Jari Saramäki. Temporal networks. *Physics reports*, 519:97–125, 2012.
- [30] J. M. Pacheco, A. Traulsen, and M. A. Nowak. Coevolution of strategy and structure in complex networks with dynamical linking. *Phys. Rev. Lett.*, 97:258103, 2006.
- [31] S. Fabri and V. Kadiramanathan. Dynamic structure neural networks for stable adaptive control of nonlinear systems. *Neural Networks, IEEE Transactions on Systems, Man, and Cybernetics*, 7:1151–1167, 1996.
- [32] Shiqian Wu and Meng Joo Er. Dynamic fuzzy neural networks-a novel approach to function approximation. *IEEE Transactions on Systems, Man, and Cybernetics*, 30:358–364, 2000.