Sampling methods for efficient training of graph convolutional networks: A survey

Xin Liu, Mingyu Yan, Lei Deng, *Member, IEEE*, Guoqi Li, *Member, IEEE*, Xiaochun Ye, and Dongrui Fan, *Senior Member, IEEE*

Abstract—Graph Convolutional Networks (GCNs) have received significant attention from various research fields due to the excellent performance in learning graph representations. Although GCN performs well compared with other methods, it still faces challenges. Training a GCN model for largescale graphs in a conventional way requires high computation and storage costs. Therefore, motivated by an urgent need in terms of efficiency and scalability in training GCN, sampling methods have been proposed and achieved a significant effect. In this paper, we categorize sampling methods based on the sampling mechanisms and provide a comprehensive survey of sampling methods for efficient training of GCN. To highlight the characteristics and differences of sampling methods, we present a detailed comparison within each category and further give an overall comparative analysis for the sampling methods in all categories. Finally, we discuss some challenges and future research directions of the sampling methods.

Index Terms—sampling method, graph convolutional networks (GCNs).

I. INTRODUCTION

fairly large number of data in the real world contain complex information representations and exhibit a natural graphical structure, for example, the structure of proteins [1], traffic networks [2, 3], and knowledge graphs [4, 5]. Analyzing the graph data has frequently appeared in various research fields in recent years and gradually becomes a critical task of deep learning. Typically, the types of data that deep learning models process mainly include image, text, voice, and video. These data are Euclidean structures, and can be regarded as many regular sample points in the Euclidean space [6]. However, graph data are typical non-Euclidean data and are difficult to process using general deep learning models. Therefore, motivated by some conventional

Manuscript received March 31, 2021; revised May 27, 2021. This work was partially supported by the National Natural Science Foundation of China (Grant No. 61732018, 61872335, 61802367, and 61876215), the Strategic Priority Research Program of Chinese Academy of Sciences (Grant No. XDC05000000), Beijing Academy of Artificial Intelligence (BAAI), the Open Project Program of the State Key Laboratory of Mathematical Engineering and Advanced Computing(2019A07), the Open Project of Zhejiang laboratory, and a grant from the Institute for Guo Qiang, Tsinghua University. (Corresponding author: Mingyu Yan.)

X. Liu, M. Y. Yan, X. C. Ye and D. R. Fan are with the State Key Laboratory of Computer Architecture, Institute of Computing Technology, Chinese Academy of Sciences, Beijing 100086, China. (e-mail: {liuxin19g, yanmingyu, yexiaochun, fandr}@ict.ac.cn)

L. Deng and G. Q. Li are with the Department of Precision Instrument, Center for Brain Inspired Computing Research, Tsinghua University, Beijing 100084, China. (e-mail:leideng@mail.tsinghua.edu.cn; liguoqi@tsinghua.edu.cn)

X. Liu and D. R. Fan are also with the School of Computer Science and Technology, University of Chinese Academy of Sciences

deep learning methods, many modified models are proposed to process graph data. Graph neural network (GNN) [7] is one of the most influential models. Distinctly, besides the natural advantage of processing graph data, GNN is explainable and can be efficiently used in various reasoning tasks [8–14], which makes GNN a highly available model in a practical and theoretical manner. Herein, despite several variants of GNN models [15–23], we pay intensive attention to graph convolutional networks (GCNs) [21], which outperform many graph deep learning models in various graph-based tasks.

GCN shows excellent efficiency in learning graph representations and has become a research hotspot in both industry and academia. However, training GCN is a no picnic task and generally requires non-trivial cost in terms of computation and storage. Some previous works have explored improving GCN training by leveraging model-based optimizations, e.g., model simplification [24–26] and knowledge distillation [27, 28], to reduce the training cost, which provides a great leap for efficient GCN training. From another perspective, it is also observed that the original training approach used in GCN [21] generally uses a full-batch approach that has two main limitations.

Inefficiency: the full-batch training approach causes a slow convergence of gradient descent since parameters of the model are updated only once in every epoch. The full-batch parameter update in training slows down the convergence of training and leads to lower training efficiency. Poor-scalability: the full-batch gradient is computed according to all intermediate embeddings from the entire graph, making it difficult to scale the training to large graph data. In consequence, training GCN with the original full-batch approach generally requires considerable cost in time and high requirement in storage, which is not efficient and scalable for large graph data.

To overcome the limitations of the conventional training approach, sampling methods are proposed and have achieved considerable performance. In statistics, the sampling method refers to taking a part of individuals from the target population as a sample. Then, a reliable estimation or judgment is obtained by observing the interested attributes of the sample. Similarly, sampling methods used in training GCN are performed by selecting partial nodes in a graph as a sample based on the specific rule. After sampling, the embedding of one node can be aggregated based on the sampled neighbors' embeddings. Instead of using all neighbors in the conventional training approach, sampling methods construct mini-batches and assuredly reduce the computation and storage cost for GCN training with acceptable accuracy loss, simultaneously

ensuring the efficiency and scalability in training GCN.

Sampling methods benefit GCN training in terms of efficiency and scalability, and a well-designed sampling method definitely makes the training process more efficient. Recently, vast data are sampled and fed into GPU for shallow neural network training. Instead of computation in neural networks, the research focus has gradually switched to graph data sampling and aggregation. Distinctly, the aggregation phase is a compute-intensive process, where the embedding of one node is aggregated recursively based on all sampled neighbors' embeddings. However, with the dramatic growth of graph data, the sampling phase is becoming a time-consuming process, which affects the efficiency of the aggregation phase, and even the entire training, to a large extent. Therefore, sampling is a critical phase in GCN training and needs to be well considered, especially in learning large-scale graphs. Some existing surveys of graph neural network models [6, 29-31] mainly focus on model variants and applications, lacking a detailed review in terms of sampling methods.

In this paper, we provide a thorough survey on sampling methods in different categories. To summarize, we highlight our contributions as follows:

- We systematically categorize sampling methods in the existing works based on the sampling mechanisms and provide a thorough survey on sampling methods in all categories.
- We compare sampling methods from multiple aspects and highlight their characteristics. For summarization and analysis, we put forward comparisons for sampling methods within each category and further give an overall comparative analysis for sampling methods in all categories.
- We propose some challenges based on the overall analysis and discuss some potential directions of sampling methods in the future.

The rest of this paper is organized as follows. In Section II, we first introduce the background of the GCN model and sampling methods, then we present a taxonomy for sampling methods. Based on the taxonomy, we divide sampling methods into four categories and further introduce different categories of sampling methods in Section III. Besides, for sampling methods in each category, we highlight the characteristics of each method and give a detailed comparison within each category from multiple aspects. In Section IV, we present comprehensive comparison and analysis for sampling methods in all categories. In Section V, we first put forward various challenges faced by the existing sampling methods based on the overall analysis and then discuss some potential directions in the future. Finally, we conclude this paper in Section VI.

II. BACKGROUND AND CATEGORIZATION

In this section, we first outline the background of GCN. To introduce the important concept of sampling, we highlight the training process of GCN. Moreover, we present our taxonomy for sampling methods and divide sampling methods into four categories.

A. Background of GCN

1) Model: Recently, there is an increasing interest in applying convolutions to graph tasks. Inspired by the wide use

and the remarkable success of CNNs [32] in deep learning, the spectral CNN is proposed by Bruna et al. [23]. Given a weighted graph G, the index set of G is defined as I, and the eigenvector of the graph Laplacian L is defined as V. The proposed model extends convolution via the Laplacian spectrum. It takes a vector x_k of size $|I| \times f_{k-1}$ as the input of the k-th layer and outputs a vector x_{k+1} of size $|I| \times f_k$. The aforementioned graph convolution layer is defined as:

$$x_{k+1,j} = h\left(V\sum_{i=1}^{f_{k-1}} F_{k,i,j}V^T x_{k,i}\right) (j = 1, \dots, f_k), \quad (1)$$

where h is an activation function and $F_{k,i,j}$ is a diagonal matrix of learnable parameters of the filter at the k-th layer. However, the aforementioned graph convolution operation results in potential high computation cost and bad spatial localization. For every forward propagation, the multiplications between V, $F_{k,i,j}$, and V^T lead to $O(n^3)$ computation complexity. Besides, the non-parametric filters also have several limitations: they are not localized in the vertex domain and their learning complexity of the parameters in each layer is O(n).

To overcome these drawbacks, ChebNet [19] uses the Chebyshev polynomial of the diagonal matrix of eigenvalues to approximate the filter g_{θ} . That is:

$$g_{\theta}\left(\Lambda\right) = \sum_{k=0}^{K-1} \theta_k T_k\left(\widetilde{\Lambda}\right),\tag{2}$$

where $\widetilde{\Lambda}=2\Lambda/\lambda_{max}$ - I_n , λ_{max} denotes the largest eigenvalue of Λ , and θ_k is the parameter vector of Chebyshev polynomial coefficients. Herein, the Chebyshev polynomials are defined in a recursive format: $T_k(x)=2xT_{k-1}(x)$ - $T_{k-2}(x)$ with $T_0(x)=1$ and $T_1(x)=x$. Thus, $T_k\left(\widetilde{\Lambda}\right)$ can be computed according to the above formula under the condition that the values of Λ lie in [-1, 1]. Thereby, the convolution operation of input x is defined as:

$$x * g_{\theta} = U\left(\sum_{k=0}^{K-1} \theta_{i} T_{i}\left(\widetilde{\Lambda}\right)\right) U^{T} x$$

$$= \sum_{k=0}^{K-1} \theta_{k} T_{k}\left(\widetilde{L}\right) x,$$
(3)

where $\widetilde{L}=2L/\lambda_{max}$ - I_n , and $T_k\left(\widetilde{L}\right)=UT_k\left(\widetilde{\Lambda}\right)U^T$. Therefore, the computation complexity is reduced to $O\left(K|E|\right)$ by avoiding an explicit use of the Graph Fourier basis (Herein, |E| is the number of edges).

Based on the special variant of the ChebNet [19], GCN [21] is proposed by Kipf et al. for semi-supervised classification of nodes in a graph. Specifically, GCN introduces a first-order approximation of the ChebNet, that is, K is fixed as 1 and λ_{max} is fixed as 2 in Equation (3). Under this special condition, Equation (3) is simplified as:

$$x * q_{\theta} = \theta_0 x - \theta_1 D^{-1/2} A D^{-1/2} x, \tag{4}$$

where A is an adjacency matrix and D is a degree matrix. To constrain the number of parameters, under the assumption

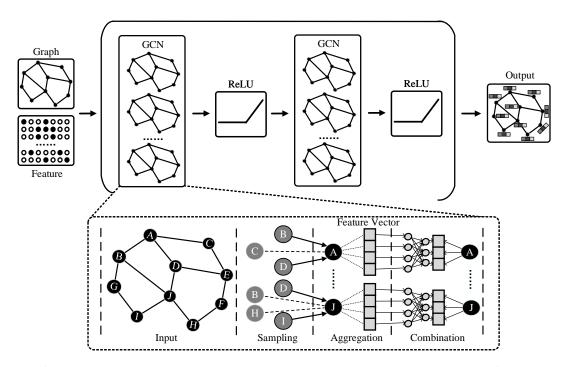


Fig. 1: A variant of graph convolutional networks with two GCN layers. Note that in many variants of GCNs, one GCN layer is generally followed by an ReLU activation function or a pooling layer, or a CNN layer, which depends on the model and the graph task.

that $\theta = \theta_0 = -\theta_1$, the graph convolution can be rewritten as:

$$x * g_{\theta} = \theta \left(I_N + D^{-1/2} A D^{-1/2} \right) x.$$
 (5)

Besides, GCN put forward two tricks: self-loop and renormalization. Since the eigenvalues of $I_N+D^{-1/2}AD^{-1/2}$ in Equation (5) lie in [0,2], the repeated use of this graph convolution operation can cause some serious problems, such as exploding or vanishment of the gradient, and numerical instability. Therefore, $I_N+D^{-1/2}AD^{-1/2}$ is modified to $\widetilde{D}^{-1/2}\widetilde{A}\widetilde{D}^{-1/2}$, with $\widetilde{A}=A+I_N$ and $\widetilde{D}_{ii}=\sum_j \widetilde{A}_{ij}$. Moreover, to support multiple dimensional inputs, Kipf et al. [21] modify the convolution layer and finally give a layer-wise propagation rule, which is widely cited in subsequent works:

$$H^{k+1} = \sigma \left(\widetilde{D}^{-1/2} \widetilde{A} \widetilde{D}^{-1/2} H^k W^k \right). \tag{6}$$

Herein, H^k is the hidden representation matrix in the k-th layer of GCN, and W^k is the trainable matrix that corresponds to the weights in k-th layer of GCN. $\sigma(.)$ denotes a specific activation function, such as ReLU and Softmax activation function.

So far, we have introduced the GCN model [21] and some basic models [19, 23] for inspiration. Typically, the common ground between these models is that the construction of graph convolutions is based on filters from the aspect of the signal processing field [33]. Thereby, these models are categorized as spectral-based models in the existing surveys [6, 29–31]. In contrast, another perspective that defines the graph convolutional operation on a spatial dimension is devoted to capturing the relationship between the target node and its neighbors, which is inspired by the application of performing

CNNs on images. Such models generally apply graph convolutional layers to a neighboring node region and compute the representation of a target node from its neighbors in diverse approaches, e.g., DCNN [17], MPNNs [34], GraphSAGE [35]. And these models are categorized as spatial-based (non-spectral) models in the existing surveys [6, 29–31]. As a bridge, GCN [21] fills the gap between spectral-based models and spectral-based models and provides both practical and theoretical supports for building novel graph convolutional networks.

2) Limitations: Due to the attractive universality and efficiency of GCN, innovative applications using GCN to process multiple types of data have appeared in various fields [1-4, 36–41]. However, there are some limitations in GCN. The conventional training approach used in GCN is inefficient. Distinctly, by observing Equation (6), GCN uses a graph convolution operation to learn the embeddings of nodes in each layer under a top-down order. In this process, one node's embedding is computed by aggregating the embeddings of the neighboring nodes in a recursive manner. As the model goes deeper, the computation cost of the nodes' embeddings will become unacceptable. Besides, since the model's weight matrices are trained using a full-batch gradient descent approach, the model parameters are updated only once in every epoch, which slows down the convergence and ultimately affects the model's training efficiency.

On the other hand, the conventional training approach used in GCN is also poor in scalability. Since nodes' embeddings are aggregated recursively from the neighbors' embeddings layer by layer, the embeddings in the final layer therefore require all embeddings of nodes in the upper layers, bring-

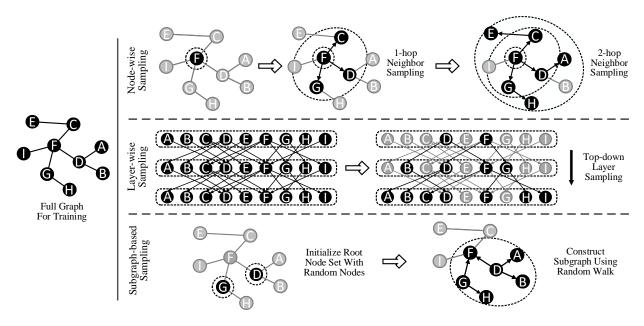


Fig. 2: Illustration on the typical sampling process of the sampling method in each category.

ing about high storage cost. Moreover, the model's gradient update in the full-batch training approach requires storing all intermediate embeddings, which makes the training unable to extend to large-scale graphs. In original GCN [21], Kipf et al. built the GCN model using quite shallow neural networks. Recently, with the dramatic expansion of graph data, there is an urgent need to build more complex GCN models for learning large-scale graphs. Thereby, the conventional training approach still requires continuous improvement.

3) Sampling in the training of GCN: To overcome the limitations of the conventional training approach, sampling methods have been proposed and achieved a significant effect. Fig. 1 illustrates a variant of graph convolutional networks with two GCN layers. Like general neural networks, the training process of GCN can be divided into forward propagation and backward propagation. In the forward propagation, a graph and the corresponding features are fed into the model. Then, a graph convolutional layer gets embeddings of nodes after several phases. The final output that includes graph embeddings is obtained by stacking multiple layers. In the backward propagation, the loss between labels and predictions generated in the forward propagation is computed to update the model parameters. Finally, a well-trained model is obtained by repeating the above two processes. To analyze the time-consuming phases, we formally dissect the computation process in one graph convolutional layer and divide the process into three phases [42, 43], namely, sampling, aggregation and combination. As mentioned above, the partial nodes of an entire graph are selected based on a certain standard in the sampling phase. For the aggregation phase, many works [18, 21, 35, 44] recursively aggregate the features from the sampled neighbors of one node. After aggregation, the combination phase updates the node's feature in the current layer by combining the neighborhood features generated in aggregation with the node's feature in the upper layer [45, 46]. Formally, the typical definition of the above phases is:

$$SN(v) = Sampling^{(k)}(N(v)),$$
 (7)

$$a_{v}^{\left(k\right)}=Aggregate^{\left(k\right)}\left(\left\{ h_{u}^{\left(k-1\right)}:u\in SN\left(v\right)\right\} \right), \tag{8}$$

$$h_v^{(k)} = Combine^{(k)} \left(h_v^{(k-1)}, a_v^{(k)} \right).$$
 (9)

In Equation (7), N(v) is the neighboring nodes of node v, and SN(v) is the sampled neighbors from N(v) based on a certain standard. Since all these phases are executed in the k-th layer (iteration), we define that $a_v^{(k)}$ is the aggregation feature vector of node v in the k-th layer, and $h_v^{(k)}$ is the representation feature of node v in the k-th layer. As illustrated in the lower part in Fig. 1, the sampling phase selects a part of the neighbors of each node in a graph, for example, nodes B and D are selected for aggregating the representation feature of node A. As the previous step of the aggregation, the function of sampling is to reduce the computation cost for aggregation while maintaining comparable model accuracy. Distinctly, an efficient sampling method can accelerate the aggregation phase greatly and ultimately speed up the training. Considering that sampling methods are different in their mechanisms, we present a taxonomy of sampling methods in Section II-B.

B. Categorization of sampling methods

To systematically introduce sampling methods, we divide them into four categories, namely *node-wise* sampling, *layer-wise* sampling, *subgraph-based* sampling, and *heterogeneous* sampling. The taxonomy is based on a special standard that depends on the granularity of the sampling operation in one sampling batch. For sampling methods proposed in the works [35, 44, 47, 48], the sampling operation is applied to each node's neighbors. A part of neighbors of a single node are sampled in one sampling batch, so we define this kind of

TABLE I: Categories and correlative works of the sampling methods

Categories	Works		
Node-wise sampling method	GraphSAGE [35], PinSage [44], SSE [47], VR-GCN [48]		
Layer-wise sampling method	FastGCN [49], AS-GCN [50], LADIES [51]		
Subgraph-based sampling method	Cluster-GCN [52], GraphSAINT [53],		
Subgraph-based sampling method	RWT [54], Parallelized Graph Sampling [55]		
Heterogeneous sampling method	Time-related sampling [56], HetGNN [57],		
Heterogeneous sampling method	HGSampling [58], Text Graph Sampling [59]		

sampling methods as the node-wise sampling method; for sampling methods proposed in the works [49–51], multiple nodes are sampled simultaneously in the sampling operation in each layer, so we define this kind of sampling methods as the layer-wise sampling method; for sampling methods proposed in the works [52–55], a subgraph that is induced from specially chosen nodes (and edges) is sampled in one sampling batch for further computation, so we define this kind of sampling methods as the subgraph-based sampling method; for sampling methods proposed in the works [56–59], different types of nodes and edges are sampled in a heterogeneous graph. This kind of sampling methods generally vary with different structures of heterogeneous graphs, and we therefore define this kind of sampling methods as the heterogeneous sampling method.

An illustration of the typical process of sampling methods in the first three categories is shown in Fig. 2 (We did not show the process of heterogeneous sampling methods since the heterogeneous sampling is generally fickle). Based on our taxonomy, we systematically introduce the characteristics of sampling methods in each category and put forward detailed comparisons in Section III. The correlative works are given in TABLE I by category.

III. SAMPLING METHODS

In this section, we introduce sampling methods by category. In each category, we highlight the characteristics for each sampling method and compare them from multiple aspects. It is important to note that most of the sampling methods we introduce in this section are applied to spatial-based GCN models for capturing the relationship between nodes in a neighboring node region. Besides, since most of the sampling methods use common benchmark datasets, we give summary information of these datasets in TABLE II.

A. Node-wise sampling method

Node-wise sampling method is the fundamental sampling method and is first proposed by some inspiring works. Generally, the common ground between node-wise sampling methods is that they perform the sampling process on each node and sample neighbors based on specific probability. Simply taking the form of the formula in Equation 7, we modify it to be the following form:

$$SN\left(v\right) = Sampling^{\left(k\right)}\left(N\left(v\right),P\right),$$
 (10)

TABLE II: Summary information of the datasets

n ibbb	II. Samma	j mnomane	or the dutus	Cts
Dataset	#Classes	#Nodes	#Edges	#Features
Cora [60]	7	2708	5429	1433
Citeseer [60]	6	3327	4732	3703
Pubmed [60]	3	19,717	44,338	500
PPI [61]	121	14,755	225,270	50
Flickr [53]	7	89,250	899,756	500
Reddit [35]	41	232,965	11,606,919	602
Yelp [53]	100	716,847	6,977,410	300
$Amazon^1$	107	1,598,960	132,169,734	200

Note¹: The size of the Amazon dataset is different in many works [45, 52, 53, 62], here we choose the version used in the work [53].

$$\begin{cases} P \sim Uniform(0, M), & Random \\ P \propto Metrics(v), & Non-random \end{cases}$$

Here, for random sampling, the probability P obeys uniform distribution, and M denotes the maximum number of neighbors to be sampled of node v. Sampling methods used in works [35, 47, 48] distinctly satisfy the characteristics of random sampling. For non-random sampling, the probability P is non-uniform and possibly is proportional to particular metrics of node v, e.g., PinSage [44] computes the L1-normalized visit counts to define the top T neighbors and affect the sampling probability, where neighbors with higher L1-normalized visit counts are easier to be sampled. In this case, the metrics-based probability requires the pre-computed metrics before performing the sampling process.

In most instances, it is inflexible and inefficient to sample all neighbors of each node in the training process, and we prefer to add a restricted value to the sampling process for flexibly controlling. Since the sampling size of neighbors cannot be arbitrarily large, we restrict the original sampling size to be an appropriate value and redefine the sampling form as:

$$SN(v) = Sampling^{(k)}\left(N(v), P, RN^{(k)}\right),$$
 (11)
$$\begin{cases} P \sim Uniform(0, M), & Random \\ P \propto Metrics(v), & Non-random \end{cases}$$

where $RN^{(k)}$ denotes the restricted number of neighbors to be sampled in one sampling batch in the k-th layer. To a certain extent, most node-wise sampling methods can be abstracted in the form of Equation 11, and the main difference between these methods lies in the unique mechanism added to the original neighbor sampling process. We compare these differences in the last part of this section. Next up, we will introduce

some typical works leveraging the node-wise sampling method in detail and highlight each method's characteristics in the following subsections.

1) GraphSAGE: GraphSAGE [35] is a general framework for learning node embeddings. To train the model efficiently, an inductive process is learned to generate node embeddings using neighborhood sampling and aggregation. Specifically, the sampling operation randomly selects neighbors for each node in the graph, which is closely followed by the aggregation. The aggregation leverages the sampled neighbors' features and generates the embedding of each node from the top layer to the final layer. Then, the output embedding is used for the model's weight update and some specific applications. The authors also propose three alternative aggregators, which can be learned in a supervised or unsupervised approach. Detailed pseudocode of the forward propagation algorithm is given in Algorithm 1, which covers the sampling (lines 2-7 of the algorithm) and aggregation process.

Algorithm 1: GraphSAGE minibatch forward propagation algorithm [35]

```
Input: Graph \mathcal{G}(\mathcal{V}, \mathcal{E}); depth K; minibatch node set \mathcal{B};
                        non-linearity \sigma; weight matrices
                        \mathbf{W}^k, \forall k \in \{1, \dots, K\}; \text{ input features } \{\mathbf{x}_v, \forall v \in \mathcal{B}\};
                        differentiable aggregator functions AGGREGATE_k,
                        \forall k \in \{1,\ldots,K\}; \text{ neighborhood sampling functions,} \\ \mathcal{N}_k: v \to 2^{\mathcal{V}}, \forall k \in \{1,\ldots,K\} 
       Output: Vector representations \mathbf{z}_v for all \mathbf{v} \in \mathcal{B}
 1 \mathcal{B}^k \leftarrow \mathcal{B};
 2 for k = K \dots 1 do
                \mathcal{B}^{k-1} \leftarrow \mathcal{B}^k:
 3
                for u \in \mathcal{B}^k do
 4
                       \mathcal{B}^{k-1} \leftarrow \mathcal{B}^{k-1} \cup \mathcal{N}_k(u)
  5
 6
 7 end
 \mathbf{8} \ \mathbf{h}_{u}^{0} \leftarrow \mathbf{x}_{v}, \forall v \in \mathcal{B}^{0};
 9 for k=1\ldots K do
                for u \in \mathcal{B}^k do
10
                         \begin{aligned} \mathbf{h}_{\mathcal{N}(u)}^{k} &\leftarrow \text{AGGREGATE}_{k}(\{\mathbf{h}_{u'}^{k-1}, \forall u' \in \mathcal{N}_{k}(u)\}); \\ \mathbf{h}_{u}^{k} &\leftarrow \sigma\left(\mathbf{W}^{k} \cdot \text{CONCAT}(\mathbf{h}_{u}^{k-1}, \mathbf{h}_{\mathcal{N}(u)}^{k})\right); \end{aligned}
11
12
                         \mathbf{h}_{u}^{k} \leftarrow \mathbf{h}_{u}^{k} / \|\mathbf{h}_{u}^{k}\|_{2};
13
                end
14
15 end
16 \mathbf{z}_u \leftarrow \mathbf{h}_u^K, \forall u \in \mathcal{B}
```

The node-wise sampling method proposed in GraphSAGE corresponds to the typical node-wise sampling process in Fig. 2. For each node in the training graph, the sampling method samples k-hop neighbors by search depth. Then, the sampled neighbors are added to the minibatch node set \mathcal{B}^k for storage. Besides, the authors choose the corresponding sampling size for each depth (layer) in the model by demonstrating the different neighborhood sampling sizes with the impact on the model performance. Distinctly, the node-wise sampling method proposed in GraphSAGE satisfies the form of Equation 11, where the sampling probability P obeys uniform distribution, and k is set to 2. Restricted numbers of neighbors to be sampled in the first and second layers are set to 25 and 10, respectively. Then, the sampling process can be specified

in a detailed format:

$$SN^{(1)}(v) = Sampling^{(1)}(N(v), P, 25),$$
 (12a)

$$SN^{(2)}\left(v\right) = Sampling^{(2)}\left(N\left(v\right), P, 10\right),$$
 (12b)

$$N = Union(N, SN^{(1)}, SN^{(2)}),$$
 (12c)

where N denotes the node set used for the aggregation process. In this way, 2-hop neighbors for aggregation are randomly sampled. And the complexity in time and space per batch is controlled as $\mathcal{O}\left(\Pi_{i=1}^2RN^{(i)}\right)$, guaranteeing acceptable and predictable runtime in mini-batch GCN training.

The proposed node-wise sampling method in GraphSAGE has the following characteristics.

- Heuristic. GraphSAGE first introduces the mini-batch method into GCN training. Instead of using all nodes in the graph, the sampling method randomly selects a fixed number of neighbors of each node to reduce the computation cost. Compared with aggregating all node features for embedding generation, partial neighbors are sampled in a mini-batch that may cause loss of information. Still, GraphSAGE achieves a good trade-off between performance and runtime leveraging the neighborhood sampling.
- Storage-friendly. The original training approach uses a full-batch approach to compute the gradient. For each training epoch, the whole graph and all intermediate embeddings are required to update the full gradient, leading to high storage cost. The sampling method proposed in GraphSAGE reduces the number of features being aggregated in one batch by restricting the sampling size, which helps to lower the storage requirement in GCN training.
- Stochastic. The number of neighbors per node (defined as M) is unknowable and stochastic in a training graph. Since the sampling method proposed in GraphSAGE samples a fixed number (defined as N) of neighbors of each node, when N is larger than M, the same neighbors will inevitably be sampled multiple times, leading to lots of redundant computation. Therefore, the randomness in the sampling method may cause indeterminacy and thus lower efficiency of training.
- 2) PinSage: PinSage [44] is a highly scalable framework that designs for the industrial recommender system. Since the user-item network's transformed graph includes countless nodes and edges, the authors use multiple localized convolutional modules to aggregate the neighborhood representations and generate embedding for nodes. Each convolutional module learns to represent the partial neighborhood information of one node, so that the embedding can be obtained by stacking multiple convolutional modules. The computation of neighborhood representations between nodes uses the hierarchical shared parameters to ensure that the computation complexity has no concern with the size of the input graph. The authors also leverage some tricks, such as negative sampling [63], to optimize the PinSage-based training process and further design a curriculum training approach [64] for faster convergence. The embeddings output by PinSage are used for the candidate generation in the recommender system.

The node-wise sampling method proposed in PinSage is greatly similar to the method in GraphSage [35] at the pseudocode level. Differently, PinSage leverages an importancebased measuring standard to define the neighborhood of one node. The authors perform a random walk simulation that begins with an initial node v and then compute the nodes' L1-normalized visit counts [65]. One node's neighborhood is defined as the top T neighbors with the largest normalized visit counts, that is, T neighbors with the largest L1-normalized visit counts are sampled for one node. The larger normalized visit count a neighbor has, the greater its importance and influence on v. Distinctly, the node-wise sampling method proposed in GraphSAGE satisfies the form of Equation 11, where the sampling probability P is non-uniform and proportional to the L1-normalized visit counts. Through experiments and observations, the authors find that a 2-layer GCN with neighbors size T set to 50 achieves an optimal trade-off in capturing neighborhood representation and training the model. The sampling process can be specified in a detailed format:

$$Metrics(v) = Ordered\left\{\left(\frac{vc_{u,v}}{\sum_{u}|vc_{u,v}|}\right)\right\},$$
 (13a)

$$SN^{(k)}(v) = Sampling^{(k)}(N(v), P, 50),$$
 (13b)

$$P \propto Metrics(v),$$
 (13c)

where u is a neighbor of v, and $vc_{u,v}$ denotes the visit counts recorded in the random walk simulation. Sampling probability P is proportional to Metrics(v) that includes L1-normalized visit counts in descending order. In this way, PinSage can sample the most influential neighbors for each node in the training graph.

The proposed node-wise sampling method in PinSage has the following characteristics.

- <u>Storage-friendly</u>. Only the sampled neighbors are used to aggregate the neighborhood vector, which reduces the storage requirement of training the large-scale GCN. Additionally, the node-wise sampling method helps the execution of the localized convolution. PinSage leverages the localized convolution to generate the node embedding in an efficient way, where the dense neural networks that transform neighbors' representations all share the same parameters.
- <u>Conditional</u>. The node-wise sampling method benefits sampling and aggregation in a similar manner. Compared with the random neighbor sampling, the conditional neighbor sampling selects the neighbors with the largest normalized visit counts, which makes it possible that the aggregation of the neighborhood vector can be executed using different weight parameters according to the normalized visit counts.
- 3) SSE: As many graph analytical tasks can be solved using various iterative algorithms, solutions of these algorithms require extensive iterations. These solutions are usually represented by a combination of multiple steady-state conditions, making it inefficient to achieve steady-state solutions. Therefore, the authors design a stochastic learning framework for learning the steady states and design fast-learning algorithms for various graph analysis scenarios. Stochastic Steady-state

Embedding (SSE) [47] is an alternating algorithm proposed to tackle the optimization problem in the stochastic learning framework.

The node-wise sampling method proposed in SSE helps to learn the embedding and the parameters in an alternating manner. As shown in **Algorithm 2**, the parameters W_1, W_2 and V_1, V_2 to be learned in SSE are the weight matrices of the operator \mathcal{T}_{Θ} and the parameters of the prediction function g respectively. The entire iterative algorithm runs K cycles, and each cycle includes two stages. In stage I, the $\{\hat{h}_v\}_{v\in\mathcal{V}}$ is stochastically initialized by constants. Firstly, N nodes are randomly sampled in the original graph and used to form a set $\tilde{\mathcal{V}}$. Then, for each node v_i in $\tilde{\mathcal{V}}$, all 1-hop neighbors of v_i are sampled for updating embedding in the following form:

$$SN(v_i) = Sampling(N(v_i), P), \forall v_i \in \tilde{\mathcal{V}},$$
 (14a)

$$\hat{h}_{v_i} \leftarrow (1 - \alpha)\hat{h}_{v_i} + \alpha \mathcal{T}_{\Theta}[\{\hat{h}_u\}_{u \in \mathcal{N}(v_i)}], \forall v_i \in \tilde{\mathcal{V}}, \quad (14b)$$

where the operator \mathcal{T}_{Θ} enforces node embeddings' steady-state conditions according to information of all sampled neighbors, and α denotes a decay factor introduced by moving average approach. The sampling process in stage I is similar to simply performing random neighbor sampling used in GraphSAGE [35] for only 1-hop neighbors without restriction. In stage II, when $\{\hat{h}_v\}_{v\in\mathcal{V}}$ meets the steady-state equation, the labeled nodes are sampled to update W_i and V_i using vanilla stochastic gradient descent.

Algorithm 2: Stochastic steady-state embedding algorithm [47]

The proposed node-wise sampling method in SSE has the following characteristics.

- Asynchronous. The update of embedding \hat{h}_{v_i} is executed asynchronously between the sampled nodes. The reason is that the computation complexity of synchronous updates is costly, especially when handling large-scale graphs. Besides, the authors [47] only use 1-hop neighbors to update the embedding, which avoids the exponential growth of neighbors and makes asynchronous updates feasible.
- Alternating. The algorithm alternates between leveraging the operator \mathcal{T}_{Θ} and 1-order neighborhood representations to update the embedding of the sampled nodes, and leveraging the computed loss via stochastic gradient descent to update the parameters of the operator \mathcal{T}_{Θ} and the link function g. The authors also find that the model will gain a faster convergence

rate and better generalization when the number of inner loops in embedding update is larger than that in parameter updates.

4) VR-GCN: VR-GCN [48] is a stochastic approximation algorithm for efficient GCN training. To alleviate the exponential growth of the receptive field caused by the recursive computation of neighborhood representations, VR-GCN leverages a variance reduction technique to restrict the size of sampled neighbors to an arbitrarily small number. Empirically, VR-GCN only samples 2 neighbors per node, which still achieves a comparable predictive performance compared with some existing methods.

Algorithm 3: Constructing the receptive fields and random propagation matrices [48]

```
\begin{array}{l} r^{(L)} \leftarrow \mathcal{V}_B \\ \text{for } layer \ l \leftarrow L-1 \ to \ 0 \ \text{do} \\ & \begin{array}{l} r^{(l)} \leftarrow \varnothing \\ \hat{P}^{(l)} \leftarrow \textbf{0} \\ \text{for } \text{each node } u \in r^{(l+1)} \ \text{do} \\ & \begin{array}{l} \hat{P}^{(l)}_{uu} \leftarrow \hat{P}^{(l)}_{uu} + \hat{P}_{uu} n(u)/D^{(l)} \\ \text{for } D^{(l)} - 1 \ \text{random neighbors } v \in n(u) \ \text{do} \\ & \begin{array}{l} r^{(l)} \leftarrow r^{(l)} \cup \{v\} \\ & \hat{P}^{(l)}_{uv} \leftarrow \hat{P}^{(l)}_{uv} + \hat{P}_{uv} n(u)/D^{(l)} \\ \text{end} \\ \text{end} \end{array} \end{array}
```

The basic sampling process in VR-GCN is to randomly sample $D^{(l)}$ neighbors for each node u in the set of receptive field in the (l+1) layer, which is shown in the inner loop of the **Algorithm 3**. The node-wise sampling method used in VR-GCN can be regarded as a variant of GraphSAGE [35] with a particular restriction that only two neighbors are sampled per node for updating the receptive field r and the propagation matrices \hat{P} . The above process can be formally specified as the following form:

$$r^{(k)}, \hat{P}^{(k)} \leftarrow Update\left(u, N(u)\right), \forall u \in r^{(k+1)},$$
 (15a)

$$SN^{(k)}\left(u\right) = Sampling^{(k)}\left(N\left(u\right), P, 1\right),$$
 (15b)

$$r^{(k)}, \hat{P}^{(k)} \leftarrow Update\left(SN^{(k)}\left(u\right), N(u)\right).$$
 (15c)

Note that the node u is always considered as a neighbor of itself, and therefore only one neighbor (excluding u) is sampled. The main novelty of this method is that the authors use the historical activation $\bar{h}_v^{(l)}$ to approximate the $h_v^{(l)}$. Denote $\Delta h_v^{(l)}$ as the difference between $\bar{h}_v^{(l)}$ and $h_v^{(l)}$, that is, $h_v^{(l)} = \bar{h}_v^{(l)} + \Delta h_v^{(l)}$. In each training batch, the control variate based estimator, which refers as CV, is performed leveraging activations $\bar{h}_v^{(l)}$ and $h_v^{(l)}$ in the forward propagation, and the model's weight is updated based on the computed loss in the backward propagation. Then, the historical activation $\bar{h}_v^{(l)}$ is updated leveraging $h_v^{(l)}$. Since the $\Delta h_v^{(l)}$ gradually

converges to zero, the variance of the CV estimator is ultimately becoming zero during training GCN. Therefore, VR-GCN successfully combines reducing the variance and a fast training speed.

The proposed node-wise sampling method in VR-GCN has the following characteristics.

- <u>Time-saving</u>. Based on the stochastic approximation algorithm, only two neighbors are empirically sampled for each node in one mini-batch. Compared with the original GCN [21] and GraphSAGE [35], the sampled size is arbitrary small, which makes it possible that the time cost of training GCN is relatively small. Besides, the historical activation $\bar{h}_v^{(l)}$ does not need to be computed recursively.
- Approximated. Neighborhood representation of each node is approximated by the restricted neighbor sampling. Based on the sampled nodes, the embedding is approximated by the historical activation. Further, the approximated gradient is computed for model update leveraging the CV estimator. The approximate method makes the model theoretically converge to a local optimum.
- 5) Comparisons within the category: In the preceding subsections, we have introduced typical node-wise sampling methods. Distinctly, it is common ground that all these methods sample neighbors for each node in a training graph. However, some differences lie in several aspects, e.g., sampling depth and sampling condition, since not all node-wise sampling methods sample neighbors in a random manner. For summarization and analysis, we put forward some considerable questions and compare these sampling methods from multiple aspects. A summary of the comparisons is given in TABLE III.

• How they work?

To analyze the *availability* of a sampling method, we explain the workflow of these methods based on their sampling conditions in the form of illustration. As illustrated in Fig. 3, GraphSAGE randomly samples k-hop (herein, k = 2) neighbors for each node in a recursive manner. As an improvement, VR-GCN optimizes the random sampling strategy by restricting the sampling size, which reduces the receptive field size and guarantees the training convergence. SSE uses a random sampling strategy to sample 1-hop neighbors for updating the embedding and functions (operator). The random sampling strategy used in these methods is simple yet efficient, reducing the training cost in computation and storage compared with the original GCN. Differently, PinSage uses conditional sampling to select neighbors according to normalized visit counts, which guarantees the correlation between the sampled neighbors.

• What's the difference?

Excluding the sampling condition, the differences between among methods are also reflected in some details of neighbor sampling. In the aspect of sampling depth and neighbor extension, GraphSAGE and VR-GCN similarly sample *K*-hop neighbors for each node recursively, which leads to the exponential neighborhood extension. PinSage samples neighbors based on the normalized visit counts in a random walk process, but it still cannot avoid the exponential extension of the neighborhood. SSE only samples 1-hop neighbors to maintain neighbors' linear extension, ensuring efficiency and

Method	Sampling Depth	Sampling Condition	Neighbor Extension	Extra Mechanism		
GraphSAGE [35]	K-hop Neighbors	Random Sampling	Exponential Extension	-		
PinSage [44]	Random walk Depth	Normalized Visit Counts	Exponential Extension	Random Walk Simulation		
SSE [47]	1-hop Neighbors	Random Sampling	Linear Extension	Alternating Sampling		
VR-GCN [48]	K-hop Neighbors	Random Sampling	Exponential Extension	Historical Activation		

TABLE III: Summary of the comparisons among node-wise sampling methods

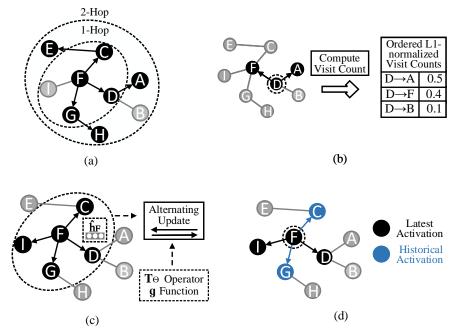


Fig. 3: Illustration on the introduced node-wise sampling methods in existing works. (a) 2-hop neighbor sampling in Graph-SAGE. (b) Importance-based neighbor sampling in PinSage. (c) Alternating sampling for embedding and function(operator) update in SSE. (d) Neighbor sampling leveraging historical activation in VR-GCN.

effectiveness in training. Distinctly, the exponential extension of the neighborhood will bring up significant computation and storage costs, which may deteriorate the *efficiency* of the method.

• What's the special?

Typically, GraphSAGE first introduces the sampling strategy into GCN training, bringing inspiration to some works. Some methods modify the original random sampling proposed in GraphSAGE to achieve better performance by adding unique mechanisms. For example, PinSage traverses nodes by simulating a random walk process to compute the visit counts, which helps to sample the most influential neighbors for each node. SSE uses the alternating sampling strategy to sample 1-hop neighbors for embedding computation and labeled nodes for functions update. VR-GCN leverages the historical activation to approximate the embedding, avoiding the recursive computation, which makes it possible that comparable predictive performance is achieved with an arbitrarily small sampling size.

B. Layer-wise sampling method

Layer-wise sampling method is the improvement of nodewise sampling method and generally samples a certain number of nodes together in one sampling step. In this category of sampling methods, since multiple nodes are jointly sampled in each layer, time cost of the sampling process is significantly reduced by avoiding the exponential extension of neighbors. More importantly, a novel view that one can interpret loss and graph convolutions as integral transformations of embedding computation to reduce sampling variance leveraging importance sampling technique, is first introduced in the work [49], which is widely used in later works [50, 51].

To introduce importance sampling and Monte-Carlo approximation, we begin with recalling the forward propagation of GCN [21] in Equation 6 and rewrite the formula as an integral format:

$$h^{(l+1)}(v) = \sigma\left(\int \hat{A}(v,u)h^{(l)}(u)W^{(l)}dP(u)\right),$$
 (16)

where $\sigma(\cdot)$ denotes a specific activation function, and $\hat{A}(v,u)$ is a renormalized adjacency matrix. $h^{(l)}(u)$ and $W^{(l)}$ denote the hidden feature vector of u and weight matrix in the l-th layer, respectively. And probability P is introduced as the sampling distribution to represent various sampling, e.g., uniform probability for independent sampling and conditional probability for node/layer-dependent sampling. Specifically, in some layer-wise sampling methods, one node is sampled under the influence of other nodes in the current layer, we thereby

introduce the impact of other nodes in the form of importance sampling as:

$$h^{(l+1)}(v) = \sigma\left(\hat{A}(v, u)\mathbb{E}_{q(u)}\left[\frac{p(u|v) \cdot h^{(l)}(u)}{q(u)}\right]W^{(l)}\right), \quad (17)$$

where q(u) denotes the probability of sampling node u under the condition that all nodes in the current layer are given. In this situation, to accelerate the forward propagation in Equation 17, we specify a concrete instance and apply Monte-Carlo approximation to the expectation $\mu_q(v) = \mathbb{E}_{q(u)}[\frac{p(u|v) \cdot h^{(l)}(u)}{q(u)}]$:

$$\hat{\mu}_q(v_i) = \frac{1}{n} \sum_{j=1}^n \frac{p(\hat{u}_j | v_i) \cdot h^{(l)}(\hat{u}_j)}{q(\hat{u}_j | v_1, \dots, v_n)}.$$
 (18)

Here, $\hat{\mu}_q(v_i)$ is the approximate expectation where $\hat{u}_j \sim q(\hat{u}_j|v_1,\cdots,v_n)$. $q(\hat{u}_j|v_1,\cdots,v_n)$ is the specified format of q(u) that denotes the probability of sampling node u_j given nodes v_1,v_2,\cdots,v_n in the current layer. Next up, the target for optimizing sampling is to reduce the variance of $\hat{\mu}_q(v_i)$ as far as possible, that is, finding an optimal sampling probability $q^*(u_j)$ to minimize $Var_q(\hat{\mu}_q(v_i))$.

Practically, these layer-wise sampling methods propose diverse approaches to solve different problems that are aimed at, and there is also a distinction between the optimal sampling probabilities $q^*(u)$ used in their sampling process. We will show the differences of sampling probability in each work subsequently and compare these methods in the last part of the section to clarify how to reduce the sampling variance. Next up, we will introduce some typical works leveraging the layerwise sampling method in detail and highlight each method's characteristics in the following subsections.

1) FastGCN: FastGCN [49] is a fast learning method for training GCN. To alleviate the expensive computation caused by the exponential neighborhood expansion, FastGCN samples a certain number of nodes in each layer independently based on the pre-set probability distribution. Formally, the authors use an integral transformation of the embedding function to interpret the convolution operation in GCN. Further, under the condition that the training graph is an induced subgraph of an infinite graph, the node embedding which is in the form of integrals, can be estimated using the Monte Carlo approach. In this way, the embedding is approximatively evaluated by sampling t_l nodes in each layer. Thereby, GCN training can be represented as an inductive learning process and achieve a considerable speedup.

The layer-wise sampling method proposed in FastGCN corresponds to the typical layer-wise sampling process in Fig. 2, it samples a certain number of nodes in each layer in a batched manner. Since the main challenge in node-wise sampling methods is the massive neighbors that expand exponentially with the number of layers, the layer-wise sampling method alleviates this heavy overhead by restricting the sampling size in each layer. To reduce the variance, the authors use importance sampling technique to alter the probability distribution. As introduced by us in the previous chapter, to compute the optimal sampling probability that can minimize

 $Var_q(\hat{\mu}_q(v_i))$ as far as possible, FastGCN defines the optimal probability that is proportional to $\|\widehat{A}(:,u)\|^2$, that is,

$$q(u) = \|\widehat{A}(:, u)\|^2 \sum_{u' \in V} \|\widehat{A}(:, u')\|^2, \ u \in V.$$
 (19)

Based on the q(u), t_l nodes are sampled in each layer independently, and the inter-layer connections (edges) are reconstructed after the sampling process to link the sampled nodes. Besides, the authors also define vanilla FastGCN which samples t_l nodes in each layer uniformly as contrast and has experimentally demonstrated the advantage of importance sampling technique in predicting accuracy used in FastGCN, compared with the uniform sampling used in vanilla Fast-GCN. Detailed pseudocode of the training process is given in **Algorithm 4**, which includes the sampling and forward propagation.

The proposed layer-wise sampling method in FastGCN has the following characteristics.

- <u>Fast</u>. Compared with the *k*-hop neighbor sampling, the layer-wise sampling method restricts the size of the sampled neighbors in each layer. Since the layer-wise sampling process is independent between layers, the sampled neighbors maintain a linear-growth trend, which avoids the recursive sampling of the multi-hop neighbors.
- Possibly-sparse. The layer-wise sampling method proposed in FastGCN samples a certain number of nodes in each layer independently, which may cause the situation that the sampled nodes are not connected in two consecutive layers. Thereby, the generated adjacency matrices of the sampled nodes are possibly sparse, which may deteriorate the training and model accuracy.

Algorithm 4: FastGCN batched training [49]

2) AS-GCN: AS-GCN [50] introduces an adaptive sampling approach into GCN training. It builds a sequential model from the top layer to the bottom layer. The importance of sequentiality lies in that the lower layer's nodes are sampled according to the upper layer's nodes conditionally. In this way, the sampled nodes in the lower layer can be efficiently reused in the upper layer since they are shared by their parent nodes. Besides, AS-GCN adds the variance generated by sampling into the loss function and reduces the variance through model training. To efficiently use the remote nodes' information, AS-GCN designs a skip connection to maintain the second-order

proximity, which makes it possible that the 2-hop neighbors are directly used without sampling recursively.

The layer-wise sampling method proposed in AS-GCN samples a fixed number of nodes in each layer under a top-down manner. Especially, the lower layer's nodes are sampled conditionally according to the nodes in the upper layer instead of independent sampling in each layer. The conditional sampling approach ensures the efficient reuse of the sampled nodes. Similarly to FastGCN [49], the authors transform the embedding function to a probability-based form by using importance sampling and accelerate the computation by approximating the expectation in the Monte Carlo manner. They specify the form of the variance of the approximate expectation to be:

$$Var_{q}(\hat{\mu}) = \frac{1}{n} \mathbb{E}_{q(u_{j})} \left[\frac{\left(p(u_{j}|v_{i})|h^{(l)}(u_{j})| - \mu_{q}(v_{i})q(u_{j}) \right)^{2}}{q^{2}(u_{j})} \right]. \quad (20)$$

Here, $\hat{\mu}$ is a shorthand for $\hat{\mu}_q(v_i)$. And the optimal sampling probability can be given as:

$$q^*(u_j) = \frac{p(u_j|v_i)|h^{(l)}(u_j)|}{\sum_{i=1}^{N} p(u_i|v_i)|h^{(l)}(u_i)|}.$$
 (21)

Since the optimal sampling probability is unable to compute due to the chicken-and-egg dilemma that the hidden feature can not be gained until the model is fully built through sampling, AS-GCN approximately replaces the uncomputable part with a linear function $g(x(u_i))$, that is:

$$q^*(u_j) = \frac{\sum_{i=1}^n p(u_j|v_i)|g(x(u_j))|}{\sum_{j=1}^N \sum_{i=1}^n p(u_j|v_i)|g(x(v_j))|}.$$
 (22)

Therefore, the optimal sampling probability can be computed by defining $g(x(u_i)) = W_g x(u_i)$. Besides, the variance caused by the sampler is added to the loss function for minimization during the training.

The proposed layer-wise sampling method in AS-GCN has the following characteristics.

- Adaptive. The adaptivity of the sampling method lies in two aspects. On the one hand, the training frameworks used in GraphSAGE [35] and FastGCN [49] are compatible with AS-GCN by modifying the conditional sampling probability. On the other hand, the sampler used in AS-GCN is parameterized and can be adaptively trained to reduce the variance.
- **Empirical**. To obtain the optimal sampler, the authors design a self-dependent function $g(x(u_i))$ of each node and replace the embedding function with $g(x(u_i))$ to compute the optimal sampling probability. The self-dependent function is empirically defined to be a linear form and assigned as $g(x(u_i)) = W_q x(u_i).$
- Efficient. A skip connection is added across the two layers to pass the information across layers over remote nodes efficiently. Since the skip connection mechanism preserves the second-order proximity, the nodes in the (l+1) layer can aggregate the information from the (l) layer and (l-1) layer without extra 2-hop sampling and parameter computation. In this way, the information pass between two layers with large spacing is allowed, and the training is therefore becoming more efficient.

3) LADIES: LADIES [51] is a layer-dependent importance sampling algorithm for training deep GCN models efficiently. Especially, LADIES is designed to solve the challenges of the high overhead in training and sparsity in sampling. On the one hand, the typical neighbor sampling method samples a subset of neighbors of each node in a recursive manner, but it leads to high computation cost which grows exponentially as the neighborhood expands. In some layer-wise sampling methods, many nodes are jointly sampled in each layer independently, which may cause a sparse situation in terms of node connection.

To solve the above two challenges, LADIES performs layer-dependent sampling in a top-down manner. A detailed sampling procedure is given in Algorithm 5. Firstly, LADIES computes the sampling probability $p_i^{(l-1)}$ of each node in the l-1 layer according to the layer-dependent Laplacian matrices:

$$p_i^{(l-1)} = \frac{\|Q^{(l)}P_{*,i}\|_2^2}{\|Q^{(l)}P\|_F^2}.$$
 (23)

where P denotes the modified Laplacian matrix, and Qdenotes the row selection matrix. Notably, the computed probabilities are organized into a random diagonal matrix for the subsequent step. Next, a fixed number of nodes are sampled in the (l-1) layer based on the $p^{(l-1)}$. Note that nodes are not independently sampled in each layer. They are generated from the union set of neighbors which are sampled in the upper layer. The sampled adjacency matrix is then reconstructed between two consecutive layers since the sampling process is based on the layer-dependent matrices in the current and upper layers. Finally, the sampled adjacency matrix is further modified by row-wise normalization for stabilizing training.

Algorithm 5: Sampling Procedure of LADIES [51]

Require: Normalized Laplacian Matrix P; Batch Size b, Sample Number n;

Randomly sample a batch of b output nodes as \mathbf{Q}^L for l = L to l do

Get layer-dependent laplacian matrix $\mathbf{Q}^{(l)}\mathbf{P}$. Calculate sampling probability for each node using

 $p_i^{(l-1)} \leftarrow \frac{\|\mathbf{Q}^{(l)}\mathbf{P}_{*,i}\|_2^2}{\|\mathbf{Q}^{(l)}\mathbf{P}\|_F^2}, \text{and organize them into a random diagonal matrix } S^{(l-1)}.$

Sample n nodes in l-1 layer using $p^{(l-1)}$. The sampled nodes formulate $\mathbf{Q}^{(l-1)}$

Reconstruct sampled laplacian matrix between sampled nodes in layer l-1 and l by $\tilde{\mathbf{P}}^{(l-1)} \leftarrow \mathbf{Q}^{(l)} \mathbf{P} \mathbf{S}^{(l-1)} \mathbf{Q}^{(l-1)\top}$, then normalize it by $\tilde{\mathbf{P}}^{(l)} \leftarrow \mathbf{D}_{\tilde{\mathbf{P}}^{(l)}}^{-1} \tilde{\mathbf{P}}^{(l)}$.

return Modified Laplacian Matrices $\{\tilde{\mathbf{P}}^{(l)}\}_{l=1,...,L}$ and Sampled Node at Input Layer \mathbf{Q}^0 ;

LADIES has the following characteristics.

• Laver-dependent. The neighbor dependence of each node is leveraged in LADIES, where nodes are conditionally sampled in the (l-1) layer according to the sampled nodes in the (l) layer. The characteristic of layer-dependent sampling ensures that the adjacency matrices generated by the sampled

Method **Intra-layer Sampling Inter-layer Connection** Variance Reduction Extra Mechanism Probabilistic Sampling Independent Layer Change Sampling Distribution FastGCN [49] on Independent Nodes Sampling with Importance Sampling Probabilistic Sampling Layer-dependent Importance Sampling & AS-GCN [50] Skip Connection Based on Parent Nodes Sampling **Explicit Variance Reduction** Probabilistic Sampling Layer-dependent Change Sampling Distribution Laplacian Matrix LADIES [51] with Restriction Sampling with Importance Sampling Normalization

TABLE IV: Summary of the comparisons between layer-wise sampling methods

TABLE V: Comparison of testing Micro F1 scores between layer-wise sampling methods

Cora	Pubmed	PPI	Reddit	Flickr
0.827±0.001	0.895 ±0.005	0.502±0.003	0.825±0.006	0.500±0.001
0.830±0.001	0.880 ± 0.006	0.599 ±0.004	0.890±0.013	0.506 ±0.012
0.843 ±0.003	0.880 ± 0.006	0.574 ± 0.003	0.932 ±0.001	0.465 ± 0.007
	0.827±0.001 0.830±0.001	0.827±0.001 0.895±0.005 0.830±0.001 0.880±0.006	0.827±0.001 0.895±0.005 0.502±0.003 0.830±0.001 0.880±0.006 0.599±0.004	0.827 ± 0.001 0.895 ± 0.005 0.502 ± 0.003 0.825 ± 0.006 0.830 ± 0.001 0.880 ± 0.006 0.599 ± 0.004 0.890 ± 0.013

nodes are dense, which maintains sufficient information for training GCN.

- Importance-based. LADIES uses an importance sampling approach to reduce the variance, where the importance probability for sampling only depends on the layer-dependent Laplacian matrix. Besides, importance sampling approach is also beneficial to the convergence of training.
- 4) Comparisons within the category: In the preceding subsections, we have introduced some typical layer-wise sampling methods. Similarly, these methods sample a fixed number of nodes according to the particular probability in a layer-by-layer manner and reduce the variance caused by sampling with some techniques or tricks. Although they perform the sampling based on some common ground, there are still some distinct differences between these methods. We thereby analyze the discrepancies from multiple aspects and explain them in a Q&A manner. A summary of the comparisons is given in TABLE IV.

• What's the difference?

All these methods sample nodes per layer in a mini-batch manner to guarantee the *scalability* of training for large-scale graphs. FastGCN samples t_l nodes in the (l) layer according to the pre-computed probability independently. AS-GCN samples n nodes based on the parent nodes sampled in the upper layer, where the sampling process is probability-based and dependent between layers. LADIES samples n nodes per layer with the restriction that nodes being sampled are from the union of neighbors of the already sampled nodes, which preserves the inter-layer dependence. Obviously, although all these methods sample a fixed number of nodes together in one sampling batch, FastGCN samples nodes regardless of dependency, while AS-GCN and LADIES perform sampling in a layer-dependent manner. There are both pros and cons. In FastGCN, the computation of sampling probability can be finished in the pre-processing, which reduces the time cost of sampling. However, FastGCN faces a possibly-sparse issue in the sampled result due to ignoring the dependency. AS-GCN and LADIES compute the probability in the sampling process iteratively to preserve the inter-layer dependency, which increases the computation cost. But AS-GCN and LADIES obtain denser neighborhoods in the sampled result.

• How to reduce variance?

Reducing the variance caused by sampling is the critical work to optimize the sampling, which directly affects the accuracy of the model. TABLE V [66] shows a comparison of testing Micro F1 scores among these methods. All these methods reduce variance through the approach of changing the sampling distribution by importance sampling. Besides, AS-GCN uses an explicit variance reduction technique, where the variance is added into the loss function for explicit minimization during the training. It is reported in AS-GCN that compared with directly using AS-GCN, AS-GCN with variance reduction achieves better performance, especially on the Cora dataset and the Reddit dataset. Nevertheless, GraphSAINT [53] finds that AS-GCN requires more storage than FastGCN when training on some large datasets since only AS-GCN throws a runtime error on the Yelp and Amazon datasets under the same experimental environment.

What's the special?

All these methods achieve considerable *efficiency* compared with the original GCN in terms of training cost and speed. Besides, some extra tricks are used in these methods to provide further optimization: AS-GCN uses a skip connection technique to preserve the second-order proximity across two layers, making it possible that remote nodes' information can pass efficiently across layers without extra computation. LADIES applies the normalization to Laplacian matrix in each layer, which stabilizes the training.

C. Subgraph-based sampling method

Formally, in this category of sampling methods, one or more subgraphs are sampled for each mini-batch in GCN training. Generally, a subgraph is directly formed by the graph partition algorithm, or induced from the specifically sampled nodes (edges) set. As illustrated in Fig. 4, for the former case, a training graph is partitioned using special methods, e.g., graph partition algorithms and graph clustering algorithms. Thereby, the original graph is divided into multiple subgraphs, and we can sample one or a certain number of subgraphs in each sampling batch. The sampling method used in work [52] distinctly satisfies the characteristics of the above process.

For the latter case, a subgraph is progressively generated from a specifically sampled nodes (edges) set. In this situation, one or several nodes are chosen as initial nodes. Based on the initial nodes, more nodes or edges are sampled by specific expansion and added to a candidate sampling set. Neighbors expansion can be achieved using a random walk process or probabilistic sampling. Thereby, a subgraph can be induced from the candidate sampling set. The sampling methods used in works [53–55] all satisfy the mechanism that subgraphs are induced from nodes (edges) extension.

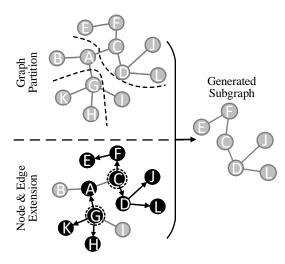


Fig. 4: Illustration on typical process of subgraph-based sampling

However, due to the diversity in subgraph generation and execution flow, subgraph-based sampling methods have many differences in various aspects. We compare these differences in the last part of this section. Next up, we will introduce some typical works leveraging the subgraph-based sampling method in detail and highlight each method's characteristics in the following subsections.

1) Cluster-GCN: As the name suggests, Cluster-GCN [52] extends the sampling operation to clusters and subgraphs. Cluster-GCN first partitions the original graph into multiple clusters by using graph clustering algorithms (e.g., Mrtis [67] and Graclus [68]). Then, Cluster-GCN randomly samples a fixed number of clusters as a batch and forms a subgraph by combining the chosen clusters. Finally, the batch training of GCN is executed based on a subgraph in each iteration. Detailed pseudocode of the training algorithm is given in Algorithm 6, where the sampling process corresponds to lines 3-4 of the algorithm.

The subgraph-based sampling method proposed in Cluster-GCN is inspired by the efficient use of stochastic gradient descent (SGD). To characterize the computation efficiency of the SGD, Cluster-GCN puts forward a concept of embedding utilization and considers that the embedding utilization is proportional to the number of edges within a subgraph in each batch. Therefore, to maximize the embedding utilization, a definite idea is to maximize the number of edges in each batch. Firstly, Cluster-GCN applies a graph clustering algorithm to

Algorithm 6: Training algorithm of Cluster-GCN [52]

Input: Graph A; feature X; label Y **Output:** Node representation \bar{X}

- 1 Partition graph nodes into c clusters V_1, V_2, \cdots, V_c by METIS;
- 2 for iter = l, \dots, \max_{i} ter do
- Randomly choose **q** clusters, t_1, \dots, t_q from **V** without 3 replacement:
- Form the subgraph \bar{G} with nodes $\mathbf{V} =$ 4
- $[\mathbf{V_{t_1}, V_{t_2}, \cdots, V_{t_q}}]$ and links $A_{\bar{V}, \bar{V}};$ Compute $\mathbf{g} \leftarrow \Delta \mathcal{L}_{A_{\bar{V}, \bar{V}}}$
- - (loss on the subgraph $A_{\bar{V},\bar{V}}$);
- Conduct Adam update using gradient estimator g;
- 7 end
- 8 Output: $\{W_l\}_{l=1}^L$

partition the original graph and forms dense subgraphs. Given a graph G, Cluster-GCN partitions all nodes into c clusters: $\mathcal{V} = [\mathcal{V}_1, \mathcal{V}_2, \cdots, \mathcal{V}_c]$. Based on the clustering result, the graph G is divided into c subgraphs: $\bar{G} = [G_1, G_2, \cdots, G_c]$, where $G_t = \{\mathcal{V}_t, \mathcal{E}_t\}, \ \mathcal{V}_t \ \text{and} \ \mathcal{E}_t \ \text{define all nodes in the } t\text{-th cluster}$ and all links between nodes in the t-th cluster respectively. Thereby, the adjacency matrix of graph G is divided into c^2 submatrices:

$$A = \bar{A} + \Delta = \begin{bmatrix} A_{11} & \cdots & A_{1c} \\ \vdots & \ddots & \vdots \\ A_{c1} & \cdots & A_{cc} \end{bmatrix}$$
 (24)

with

$$\bar{A} = \begin{bmatrix} A_{11} & \cdots & 0 \\ \vdots & \ddots & \vdots \\ 0 & \cdots & A_{cc} \end{bmatrix}, \Delta = \begin{bmatrix} 0 & \cdots & A_{1c} \\ \vdots & \ddots & \vdots \\ A_{c1} & \cdots & 0 \end{bmatrix}, \quad (25)$$

where \bar{A} is the adjacency matrix of graph \bar{G} and only consists of the diagonal square matrices A_{tt} of size $|\mathcal{V}_t| \times |\mathcal{V}_t|$. Δ consists of all off-diagonal matrices of A.

Then, Cluster-GCN proposes an approximation way that it replaces G with \bar{G} in the training of GCN. Therefore, the process of learning the final embedding can be defined as:

$$Z^{(L)} = \bar{A}' \sigma(\bar{A}' \sigma(\cdots \sigma(\bar{A}' X W^{(0)}) W^{(1)}) \cdots) W^{(L-1)}$$

$$= \begin{bmatrix} \bar{A}'_{11} \sigma(\bar{A}'_{11} \sigma(\cdots \sigma(\bar{A}'_{11} X_1 W^{(0)}) W^{(1)}) \cdots) W^{(L-1)} \\ \vdots \\ \bar{A}'_{cc} \sigma(\bar{A}'_{cc} \sigma(\cdots \sigma(\bar{A}'_{cc} X_c W^{(0)}) W^{(1)}) \cdots) W^{(L-1)} \end{bmatrix}.$$
(26)

where \bar{A}' is the normalized representation of \bar{A} and W^k is the weight matrix in the k-th layer. Since \bar{A}' includes c submatrices, each submatrix \bar{A}'_{tt} corresponds to the internal edges of the subgraph G_t .

The graph clustering algorithms guarantee the density of the subgraph in each batch, and the decomposition of the loss enables the forward and backward propagations on subgraphs in the mini-batch training. Based on the above ideas, Cluster-GCN randomly samples q clusters without replacement to form a subgraph \bar{G} . The subgraph \bar{G} not only includes all nodes and edges within the chosen clusters, but also includes

the edges between these clusters. The generation process of a subgraph in Cluster-GCN typically corresponds to the graph partition that is shown in Fig. 4. Specially, instead of directly sampling a subgraph in each batch, a fixed number of subgraphs are randomly chosen to construct a larger subgraph to maintain the randomness, which also reduces information (inter-cluster edges) loss.

The proposed subgraph-based sampling method in Cluster-GCN has the following characteristics.

- <u>Scalable</u>. In each batch, only a subgraph is loaded into GPU memory instead of the original graph, which is friendly to learning large-scale graphs. In vanilla Cluster-GCN, the mini-batch stochastic gradient descent is executed on a subgraph(cluster), which avoids the neighborhood searching outside the subgraph and ultimately reduces the training cost.
- Heuristic. Cluster-GCN leverages a stochastic multiple clustering approach to address the imbalanced distribution of nodes' labels caused by the clustering algorithm (Metis) instead of analyzing the variance in a theoretical manner. Although Cluster-GCN outperforms the previous works, it does not explicitly account for or solve the bias caused by the graph sampling. Nonetheless, Cluster-GCN provides a heuristic way to perform sampling in large-scale graphs.
- 2) Parallelized Graph Sampling: A novel GCN model based on parallelized graph sampling [55] technique is proposed in this work to train large-scale graphs accurately and efficiently. Since subgraphs are sampled independently in the training approach, the authors design a unique data structure to enable the thread-safe parallelization of the sampler and parallelize the sampling step on multiple processing units. Besides, to scale the sampling across samplers, a training scheduler is proposed to manage subgraphs pool and samplers. In each iteration, a complete GCN model is built on a sampled subgraph \mathcal{G}_{sub} for the forward and backward propagations. Detailed pseudocode of the GCN training with the parallel method is given in **Algorithm 7**.

Algorithm 7: GCN training with parallel frontier sampler [55]

```
Input: Training graph \mathcal{G}(\mathcal{V}, \mathcal{E}, \mathbf{H}^{(0)}); Labels L; Sampler
                 parameters m, n, \eta; Parallelization parameters
                 p_{inter}, p_{intra}
    Output: Trained weights \{\mathbf{W}_{self}^{(l)}, \mathbf{W}_{neigh}^{(l)} | 1 \le l \le L\}
\trianglerightSet of unused subgraphs
 1 \{G_i\} \leftarrow \emptyset
                            ⊳Iterate over minibatches
 2 while not terminate do
           if \{G_i\} is empty then
 3
                  for p = 0 to p_{inter} - 1 pardo
 4
                      \{\mathcal{G}_i\} \leftarrow \{\mathcal{G}_i\} \cup \mathbf{SAMPLE}_G(\mathcal{G}, m, n, \eta, p_{intra})
 5
 6
                   \mathcal{G}_{sub} \leftarrow \text{Subgraph popped out from } \{\mathcal{G}_i\}
 7
                   \{\mathcal{V}_{GS}^{(l)}\}, \{\mathcal{E}_{GS}^{(l)}\} \leftarrow \text{GCN construction on } \mathcal{G}_{sub}
 8
                  Forward and backward propagation of GCN
           end
10
11 end
12 return \{\mathbf{W}_{self}^{(l)}\}, \{\mathbf{W}_{neigh}^{(l)}\}
```

Algorithm 8: Parallel Dashboard based frontier sampling [55]

```
Input: Original graph \mathcal{G}(\mathcal{V}, \mathcal{E}); Frontier size m; Budget n;
              Enlargement factor \eta; Number of processors p
    Output: Induced subgraph \mathcal{G}_{sub}(\mathcal{V}_{sub}, \mathcal{E}_{sub})
 1 d \leftarrow |\mathcal{E}|/|\mathcal{V}|
 3 IA \leftarrow Array of \mathbb{R}^{2 \times (\eta \cdot m \cdot d + 1)} with value INV
 4 FS \leftarrow m vertices selected uniformly at random from \mathcal{V}
 5 \mathcal{V}_{sub} \leftarrow \{ v \mid v \in FS \}
 6 FS ← Indexable list of vertices converted from set FS
 7 IA[0, 0] \leftarrow 0;
                              IA[1, 0] \leftarrow True;
                          ▷Initialize IA from FS
 s for i = 1 to m do
         IA[0, i] \leftarrow IA[0, i - 1] + deg(FS[i - 1])
         IA[1, i] \leftarrow (i \neq m)? True : False
11 end
                         ⊳Initialize DB from FS
12 for i = 0 to m - 1 pardo
         for k = IA[i] to IA[i+1] - 1 do
13
               DB[0, k] \leftarrow FS[i]
14
               \mathsf{DB}[1,\,\mathsf{k}] \leftarrow (k \neq \mathsf{IA}[i])?(k\,\mathsf{-}\,\mathsf{IA}[i]) : -deg(FS[i])
15
               DB[2, k] \leftarrow i
16
         end
17
18 end
19 s \leftarrow m
                           20 for i = m to n - \overline{I \text{ do}}
         v_{pop} \leftarrow \text{pardo\_POP\_FRONTIER}(\text{DB},p)
21
         v_{new} \leftarrow \text{Vertex sampled from } v_{pop}\text{'s neighbors}
22
         if deg(v_{new}) > \eta \cdot m \cdot d - IA[0, s] + 1 then
23
               DB \leftarrow pardo\_CLEANUP(DB, IA, p)
24
               s \leftarrow m-1
25
26
         pardo_ADD_TO_FRONTIER(v_{new},s,DB,IA,p)
27
         \mathcal{V}_{sub} \leftarrow \mathcal{V}_{sub} \cup \{v_{new}\}
28
         s \leftarrow s + 1
29
30 end
   \mathcal{G}_{sub} \leftarrow \text{Subgraph of G induced by } \mathcal{V}_{sub}
31
32 return \mathcal{G}_{sub}(\mathcal{V}_{sub}, \mathcal{E}_{sub})
```

The parallelized graph sampling method proposed in this work is built based on the frontier sampling method [69]. Subgraphs generated by the frontier sampling method approximate the original graph in respect of numerous connectivity measures, which makes it possible that the graph sampling based model can learn accurate embeddings from a graph. To accelerate the sampling and reduce the time cost of training, the authors parallelize the frontier sampling under the condition that the subgraph's quality is well guaranteed. Besides, the authors design a novel data structure, namely, "Dashboard" table, to guarantee thread-safe parallelization of the sampling step with low complexity. Since the sampler randomly pops out a node v leveraging a probability distribution which is based on the degree of nodes and replaces v with a random neighbor u of v in each iteration, we define the current node vas a historical one when v is popped out. A detailed algorithm of parallel dashboard based sampling is given in **Algorithm 8**, where FS denotes the frontier set, and DB is a dashboard table to store information (e.g., probabilities and status) for current and historical vertices in FS. IA is an auxiliary index array used to clean up the DB to avoid overflow.

To begin with, DB and IA are initialized by FS. A parallel scheme is applied to DB to speed up the process of initialization. Next, for each iteration in the main loop of the sampling step, a vertex to be popped out next is obtained from the function "pardo_POP_FRONTIER". After the vertex v_{pop} is popped out, a vertex v_{new} is randomly sampled from v_{pop} 's neighbors. If the degree of the latest sampled vertex v_{new} implies that DB needs to be cleaned, the function "pardo_CLEANUP" is executed and reconstitutes DB leveraging the information in IA. Then, DB is updated by the function "pardo_ADD_TO_FRONTIER", and the vertex v_{new} is added into the V_{sub} . Finally, a subgraph G_{sub} is induced by the \mathcal{V}_{sub} after multiple iterations. Distinctly, multiple subgraphs are sampled in parallel in one sampling batch. The generation mechanism of a subgraph satisfies the process that nodes extension from the randomly selected node set FS that is shown in Fig. 4. Note that the abovementioned functions can be executed in parallel on multiple processors to accelerate the sampling because the subgraphs in this training approach are sampled independently. Moreover, the authors give the overall cost of sampling a subgraph with p processors, that is:

$$\left(\frac{\mathbf{COST}_{rand}}{1 - (1 - 1/\eta)^p} + \left(4 + \frac{3}{\eta - 1}\right) \frac{d \cdot \mathbf{COST}_{mem}}{p}\right) \cdot (n - m). \tag{27}$$

Based on the assumption that $COST_{rand} = COST_{mem}$ in Equation (27), the authors have proven that for any given $\epsilon > 0$, a lower bound of speedup of the sampling algorithm is $\begin{array}{l} \frac{p}{1+\epsilon}, \ \forall p \leq \epsilon d(4+\frac{3}{\eta-1}) - \eta. \end{array}$ The proposed subgraph-based sampling method in this par-

allelized training approach has the following characteristics.

- Parallelizable. Both inter-subgraph and intra-subgraph parallelization methods are used in GCN training. For intersubgraph parallelization, subgraphs are sampled independently on multiple processors in parallel with the help of the scheduler. For intra-subgraph parallelization, each sampler (an instance of sampling) can be parallelized by exploiting the parallelism of the proposed functions in the main loop of sampling in **Algorithm 8**.
- Scalable. The cost of sampling a subgraph achieves a near-linear speedup with the number of processing units in terms of scalability. Furthermore, the speedup of sampling is scalable with the number of samplers under the condition that the number of processors is fixed in the experimental platform. The authors also experimentally demonstrate the scalability in respect of the depth of GCN model, which achieves a significant training speedup relevant to the number of cores.
- 3) GraphSAINT: Motivated by training GCN models on large-scale graphs, GraphSAINT [53] proposes a graph sampling based inductive method for efficient training of GCN. GraphSAINT first uses a proper-designed sampler to estimate the probability of nodes and edges being sampled, respectively. In each batch, an appropriately connected subgraph is sampled according to the sampler. Then, GraphSAINT builds a full GCN on the sampled subgraph and executes the training process. Finally, the weights of the model are updated after the forward and backward propagations. Especially, GraphSAINT leverages normalization techniques to address the bias issue in-

troduced by the graph sampling method. Detailed pseudocode of the training algorithm is given in **Algorithm 9**, here we mainly focus on the sampling method and the normalization techniques.

Algorithm 9: Training algorithm of GraphSAINT [53]

Input: Training graph $\mathcal{G}(\mathcal{V}, \mathcal{E}, \mathbf{X})$; label \bar{Y} ; Sampler **SAMPLE** Output: GCN model with trained weights 1 Pre-processing: Setup SAMPLE parameters; Compute normalization coefficients α, λ . 2 for each minibatch do $\mathcal{G}_s(\mathcal{V}_s, \mathcal{E}_s) \leftarrow \text{Sampled sub-graph of } \mathcal{G} \text{ according to}$ **SAMPLE** GCN construction on \mathcal{G} .

 $\{y_v \mid v \in \mathcal{V}_s\} \leftarrow \text{Forward propagation of } \{x_v \mid v \in \mathcal{V}_s\},\$ normalized by α

Backward propagation from λ -normalized loss $\mathcal{L}(y_v, \bar{y}_v)$. Update Weights.

7 end

4

The subgraph-based sampling methods proposed in Graph-SAINT are alternative in training. The authors put forward two intuitions: 1) Nodes influential to each other should be sampled in the same subgraph. 2)The probability of each edge being sampled cannot be neglected. The above two intuitions will undoubtedly introduce bias into training. GraphSAINT therefore optimizes sampling by considering the bias explicitly.

Firstly, GraphSAINT proposes an unbiased estimator $\zeta_v^{(l+1)}$ of the aggregated embedding in (l + 1) layer under the condition that the embedding is learned independently in each layer. To accurately perform sampling, GraphSAINT leverages an optimal edge sampler to reduce the variance of the unbiased estimator $\zeta_v^{(l)}$. Assuming that m edges are independently sampled, the optimal probability p_e for edges that are sampled to minimize the sum of variances of ζ in all dimensions is:

$$p_e = \frac{m}{\sum_{e'} \|\sum_{l} \mathbf{b}_{e'}^{(l)}\|} \|\sum_{l} \mathbf{b}_{e}^{(l)}\|,$$
(28a)

$$\mathbf{b}_{e}^{(l)} = \widetilde{A}_{v,u} \tilde{x}_{u}^{(l-1)} + \widetilde{A}_{u,v} \tilde{x}_{v}^{(l-1)}. \tag{28b}$$

Here, e denotes an edge between node u and v, , and $\tilde{A}_{v,u}$ is defined as a scalar which takes an element from the normalized adjacency matrix. Based on the given constraints, the optimal probability p_e can be derived by the Cauchy-Schwarz inequality. Since computing $\tilde{x}_v^{(l-1)}$ in $\mathbf{b}_e^{(l)}$ will increase the complexity of the sampling, the authors ignore the $\tilde{x}_v^{(l)}$ to make p_e only dependent on the topology of the graph, that

$$p_e \propto \widetilde{A}_{v,u} + \widetilde{A}_{u,v} = \frac{1}{deg(u)} + \frac{1}{deg(u)}.$$
 (29)

GraphSAINT also proposes two random walk based samplers for multi-layer GCN by representing L-layer GCN as one-layer GCN with edge weights. Detailed pseudocode of the samplers integrated in GraphSAINT is given in **Algorithm 10**. Obviously, the generation mechanism of a subgraph in the random walk based samplers satisfies the process of nodes extension from the randomly selected root nodes, while as for edge samplers, it samples edges based on pre-computed probability and adds them to \mathcal{E}_s . And a subgraph is generated by a set of nodes \mathcal{V}_s that are end-points of edges in the sampled edge set \mathcal{E}_s .

```
Algorithm 10: Graph sampling algorithms by Graph-
  SAINT [53]
    Input: Training graph \mathcal{G}(\mathcal{V}, \mathcal{E}); Sampling parameters; node
               budget n; edge budget m; number of roots r; random
               walk length h
    Output: Sampled graph \mathcal{G}_s(\mathcal{V}_s, \mathcal{E}_s)
                                    ▶ Node sampler
 1 function NODE(\mathcal{G}, n)
 P(v) := ||\tilde{A}_{:,v}||^2 / \sum_{v' \in \mathcal{V}} ||\tilde{A}_{:,v'}||^2
 3 V_s \leftarrow n nodes randomly sampled (with replacement) from V
      according to P
 4 \mathcal{G}_s \leftarrow \text{Node induced subgraph of } \mathcal{G} \text{ from } \mathcal{V}_s
 5 end function
               ▶ Edge sampler(approximate version)
 6 function \overline{\text{EDGE}(\mathcal{G}, m)}
 7 P((u,v)) := (\frac{1}{deg(u)} + \frac{1}{deg(v)}) / \sum_{(u',v') \in \varepsilon} (\frac{1}{deg(u')} + \frac{1}{deg(v')}) 8 \mathcal{E}_s \leftarrow m edges randomly sampled (with replacement) from \mathcal{E}
      according to P
 9 \mathcal{V}_s \leftarrow Set of nodes that are end-points of edges in \mathcal{E}_s
10 \mathcal{G}_s \leftarrow \text{Node induced subgraph of } \mathcal{G} \text{ from } \mathcal{V}_s
11 end function
                            ▶ Random walk sampler
12 function RW(\overline{\mathcal{G},r,h})
13 V_{root} \leftarrow r root nodes sampled uniformly at random (with
      replacement) from \mathcal{V}
14 \mathcal{V}_s \leftarrow \mathcal{V}_{root}
15 for v \in \mathcal{V}_{root} do
          u \leftarrow v
16
          for d = 1 to h do
17
18
                 u \leftarrow \text{Node sampled uniformly at random from } u's
                  neighbor
                 \mathcal{V}_s \leftarrow \mathcal{V}_s \cup \{u\}
19
          end
20
21 end
22 \mathcal{G}_s \leftarrow \text{Node induced subgraph of } \mathcal{G} \text{ from } \mathcal{V}_s
23 end function
         ⊳ Multi – dimensional random walk sampler
   function MRW(\mathcal{G}, n, r)
   \mathcal{V}_{FS} \leftarrow r root nodes sampled uniformly at random (with
      replacement) from \mathcal{V}
26 V_s \leftarrow V_{FS}
27 for i = r + 1 to n do
28
          Select u \in \mathcal{V}_{FS} with probability
             deg(u)/\sum_{v \in \mathcal{V}_{FS}} deg(v)
          u' \leftarrow \text{Node randomly sampled from } u's neighbor
29
          \mathcal{V}_{FS} \leftarrow (\mathcal{V}_{FS} \setminus \{u\}) \cup \{u'\}
30
          \mathcal{V}_s \leftarrow \mathcal{V}_s \cup \{u\}
31
32 end
33 \mathcal{G}_s \leftarrow \text{Node induced subgraph of } \mathcal{G} \text{ from } \mathcal{V}_s
34 end function
```

The probability-based edges sampling method is similar to layer-wise sampling methods [49–51]. The common ground between them is that a fixed number of nodes (edges) are sampled according to the pre-computed probability. Differently, the edge sampler in GraphSAINT forms a subgraph from the node set relevant to the sampled edges, while layer-wise sampling methods directly construct GCN training on multi-

layer sampled nodes.

The proposed subgraph-based sampling method in Graph-SAINT has the following characteristics.

- <u>Precise</u>. In GraphSAINT, nodes that appear with a higher effect on each other are more likely to be sampled to form a subgraph, ensuring better connectivity between layers. Besides, GraphSAINT proposes normalization techniques to eliminate the bias introduced by graph sampling explicitly.
- <u>Conditional</u>. The analysis of the normalization technique and sampling probability is under the condition that the embedding of each layer is learned independently, which is similar to the treatment of layers in some layer-wise sampling methods [49, 50].
- Flexible. As shown in Algorithm 10, GraphSAINT can integrate many other graph sampling methods. On the other hand, the graph sampling based training framework used in GraphSAINT is also applicable to many other popular variants of GCN.
- 4) RWT: Ripple Walk Training (RWT) [54] is a subgraph-based training framework for large and deep GNNs (GCN & GAT). In this framework, a ripple walk sampler is integrated in RWT to sample high-quality subgraphs for computation of mini-batch gradient. In each iteration, the model's weight is updated according to the gradient. RWT is designed to simultaneously solve some critical problems in many current GNNs, namely, neighbor explosion, node dependence, and over-smoothing. The first two problems can be well solved by the subgraph-based sampling method, and the over-smoothing problem in deep GNNs can be handled by applying RWT.

The subgraph-based sampling method integrated in RWT is designed to sample particular subgraphs with two characteristics: randomness and connectivity. For randomness, each node in a graph is sampled with the same probability, and each node's neighbors are chosen with the same probability. For connectivity, each subgraph is required to have high connectivity to maintain the connectivity in the original graph.

Algorithm 11: Ripple Walk Sampler [54]

```
Input: Target graph \mathcal{G}=(\mathcal{V},\mathcal{E}); expansion ratio r; target subgraph size S

Output: Subgraph \mathcal{G}_k

1 Initiate \mathcal{G}_k=(\mathcal{V}_k,\mathcal{E}_k) with \mathcal{V}_k=\varnothing

2 Randomly select the initial node v_s, add v_s into the \mathcal{G}_k

3 while |\mathcal{V}_k|< S do

4 |NS=\{n|(n,j)\in\mathcal{E},j\in\mathcal{V}_k,n\notin\mathcal{V}\} /* Get neighbor nodes set of \mathcal{V}_k */

Randomly select r of nodes in NS, add them into the \mathcal{V}_k

6 end

7 return \mathcal{G}_k
```

To begin with, a random node v_s is chosen to initialize the subgraph \mathcal{G}_k and added into the node set \mathcal{V}_k of \mathcal{G}_k . Then, \mathcal{V}_k 's neighbor node set NS is required for further selection. For each node in \mathcal{V}_k , a certain percentage of its neighbors are randomly sampled according to the ratio r (herein, r is set to 0.5 by the authors to denote 50%) and added into \mathcal{V}_k in every expansion of the subgraph. Finally, a subgraph that includes S nodes is returned after multiple expansions. Detailed pseudocode of the ripple walk sampler is given in

TABLE VI: Summary of the comparisons between subgraph-based sampling methods

Method	Subgraph Generation	Time-consuming Part	Evaluation
Cluster-GCN [52]	Graph Clustering Algorithm	Clustering	Heuristic
Parallelized Graph Sampling [55]	Parallel Frontier Sampler	Dashboard Cleanup	Parallelizable
RWT [54]	Random Neighbor Expansion	Neighbor Traversal	Empirical
GraphSAINT-EDGE [53]	Probabilistic Edge Sampler	Edge Sampling ²	Provable
GraphSAINT-RW [53]	Random Walk Sampler	Neighbor Traversal	Empirical

Note²: The complexity of the GraphSAINT-EDGE given by the authors is $\mathcal{O}(m)$, which excludes the cost of probability computation and subgraph induction.

TABLE VII: Comparison of testing micro F1 score between subgraph-based sampling methods

${f Method}^3$	PPI	Flickr	Reddit	Yelp	Amazon
Cluster-GCN [52]	0.875 ± 0.004	$0.481 {\pm} 0.005$	0.954 ± 0.001	0.609 ± 0.005	0.759 ± 0.008
Parallelized Graph Sampling [55]	0.696 ± 0.004	$0.494{\pm}0.003$	0.960 ± 0.002	0.622 ± 0.004	0.771 ± 0.001
GraphSAINT-EDGE [53]	0.981 ±0.007	0.510 ± 0.002	0.966 ±0.001	0.653 ± 0.003	0.807 ± 0.001
GraphSAINT-RW [53]	0.981 ±0.004	0.511 ±0.001	0.966 ±0.001	0.653 ±0.003	0.815 ±0.001

Note³: The authors of RWT did not give out the F1 micro score or the available code of the project in their paper. Therefore, the test result of RWT is empty in this table.

Algorithm 11. A subgraph sampled in each batch is generated by an increasingly expanding node set. The generation process of a subgraph is similar to the neighbor sampling process in GraphSAGE [35]. Differently, GraphSAGE samples a fixed number of neighbors for each node in the training graph, while RWT simultaneously extends r of neighbors for multiple nodes in \mathcal{V}_s and gradually expands the scope of sampled neighbor set for subgraph generation. Taking the form of the formula in Equation 11, we argue that the subgraph sampling process in RWT can be given by modifying the typical form of node-wise sampling:

$$NS^{(k)} = GetAllNeighbors\left(\mathcal{V}^{(k)}\right),$$
 (30a)

$$\mathcal{V}^{(k)} = Sampling^{(k)} \left(NS^{(k)}, P, r \right), \tag{30b}$$

$$subgraph \leftarrow Union \left\{ \mathcal{V}^{(k)} \right\}.$$
 (30c)

Here, the probability P obeys uniform distribution, and r is set to 0.5 to ensure half percent of neighbors of each node are sampled for extension. The neighbor extension stops when the size of \mathcal{V}_s is not less than the preset size of the target subgraph. By repeating the above process, multiple subgraphs are sampled for training GCN.

The proposed subgraph-based sampling method in RWT has the following characteristics.

- Elastic. Both the size *M* of a mini-batch and the size *S* of a sampled subgraph can be preset before training. Therefore, the mini-batch training using subgraphs is well controlled and can be designed elastically.
- Alternative. Ripple walk sampler shows advantages in maintaining the connectivity and randomness of the subgraph. The ripple walk sampler is equivalent to Breadth First Search (BFS) when r is close to 0. Differently, the ripple walk sampler randomly selects the neighbors of nodes in \mathcal{V}_s to guarantee the randomness. Meanwhile, each expansion of the subgraph

in ripple walk sampler is based on the neighbors of nodes in V_k , which guarantees the connectivity.

5) Comparisons within the category: In the preceding subsections, we have introduced typical subgraph-based sampling methods. Distinctly, all these methods sample one or more subgraphs in each sampling batch based on different mechanisms. To summarization and analysis, we compare these methods from multiple perspectives and explain the differences between these methods in a Q&A manner. A summary of the comparisons is given in TABLE VI.

• How do they work?

An understanding of the mechanism is the primary work for analyzing the availability. Based on the common ground that all these methods output subgraphs leveraging the given input, we therefore focus on how a subgraph is generated. Cluster-GCN uses a graph clustering algorithm to partition the full graph into multiple clusters and form a subgraph with some randomly chosen clusters. Parallelized Graph Sampling modifies the frontier sampling algorithm to an approach that is executed in parallel. In RWT, a subgraph is generated by neighbor searching and sampling under the condition that an initial node is randomly chosen as a root node. Similarly, GraphSAINT-RW uses a random walk strategy to sample neighbors of a node in the root node set and generate subgraphs leveraging the selected neighbors and the root node set. The differences in sampling between RWT and GraphSAINT-RW are the root node set's initial capacity and neighbor sampling strategy. GraphSAINT-EDGE samples edges based on a pre-computed probability. In sum, subgraphs generated in all these above works are commonly induced from the nodes and edges which are selected in a random or probability-based manner.

• Can they be faster?

Efficiency is a crucial metric to quantize the execution of a method. Although all methods have been proven to be available in their papers, we hope that the sampling process in these methods can be further accelerated by reducing computation

cost. Intuitively, we focus on the most time-consuming part of these methods. In Cluster-GCN, graph clustering consumes a lot of time due to the complexity of the original graph. In Parallelized Graph Sampling, the dashboard's cleanup is proven to be the most time-consuming process by the authors. In RWT and GraphSAINT-RW, the sampling process is based on neighbor searching and selecting. Therefore, neighbor traversal causes non-trivial computation overhead. In GraphSAINT-EDGE, edge sampling is the heaviest part. In this way, a potential idea for accelerating sampling is to reduce the cost of the most time-consuming operation. For some operations which are only executed once, such as graph clustering and probability computation, we consider performing them in the pre-processing and leave the resource to frequently executed operations. For some operations which are time-consuming and unavoidable, such as dashboard cleanup, we can add some unique mechanisms to reduce the number of occurrences of these operations. Herein, since we only focus on the impact on the sampling process, the impact on the entire training should also be taken into consideration when adding new mechanisms to a sampling method.

• How to evaluate?

Evaluation of the sampling method depends on multiple metrics. *Accuracy* is a fundamental metric for evaluation. Since all these works have experimentally demonstrated their methods to be accurate, we summarize the reported results in TABLE VII. Moreover, *scalability* is a non-negligible metric to evaluate a method's performance, especially when adopting the model on large datasets. It has been proven that the minibatch training approach is more flexible and scalable than the full-batch approach. And sampling methods are also supposed to follow a mini-batch manner to maintain this characteristic of training. Last but not least, we evaluate a method based on its unique points. For example, Cluster-GCN uses a heuristic method to perform the sampling in large-scale graphs. We highlight these unique points so that readers can quickly get through to the mechanism of a method.

D. Heterogeneous sampling method

Heterogeneous sampling method is a novel strategy to handle the heterogeneity in graphs and accelerate the training. In this category of sampling methods, the main target is to perform sampling among various types of nodes reasonably and efficiently. Typically, a heterogeneous graph includes nodes and edges in different types. For example, we take the form of the definition of the heterogeneous graph given in work [57], that is, $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{O}_{\mathcal{V}}, \mathcal{R}_{\mathcal{E}})$. \mathcal{V} and \mathcal{E} denote sets that consist of various types of nodes and edges, respectively. $\mathcal{O}_{\mathcal{V}}$ represents node types that correspond to nodes in V, and $\mathcal{R}_{\mathcal{E}}$ represents edge types that correspond to edges in \mathcal{E} . Generally, relations between nodes in G are complex and imbalanced, which is reflected in that the number of neighbors of each node is different, and one single node can have different types of neighbors with an unbalanced number. In this situation, imbalanced neighbors' numbers in different types bring about a significant challenge in sampling neighbors and capturing neighborhood representation.

Therefore, it is critical for a sampling method to distinguish different types of nodes and compute the effect. We formally divide the sampling process for heterogeneous graphs into two phases. In phase one, the effect of different types of neighbors on the target node is computed to capture the importance and influence in neighborhood. We modify the typical format of sampling in Equation 7 and propose a general form of heterogeneous sampling methods:

$$E(v) = Effect(N(v), \mathcal{O}_{N(v)}, E(v), \mathcal{R}_{E(v)}), \tag{31a}$$

$$SN^{(k)}(v) = Sampling^{(k)}(E(v), N(v), R^{(k)}).$$
 (31b)

Here, N(v) and E(v) denote neighbor set and edge set of node v, respectively. $\mathcal{O}_{N(v)}$ and $\mathcal{R}_{E(v)}$ denote sets that consist of node types and edge types, respectively. E(v) is a set that stores the effect of different types of neighbors on node v. Based on the pre-computed E(v), sampling is performed for each node v to select different types of neighbors orderly. And R is a restrict factor in guaranteeing a balanced distribution of different types of neighbors in terms of number.

Since heterogeneous sampling methods generally vary in mechanism especially in capturing neighborhood representation, we thereby compare these methods in the last part of this section to emphasize the differences and commonness between the heterogeneous sampling methods. Next up, we will introduce some typical works leveraging the heterogeneous sampling method in detail and highlight each method's characteristics in the following subsections.

1) Time-related sampling: Time-related sampling [56] is a heterogeneous sampling method proposed in a GCN-based Anti-Spam (GAS) model for sampling comments in a timerelated manner. Since the spam comment on the online shopping website will badly affect consumers' buying decisions, the GAS model is proposed to identify adversarial actions and filter spam comments. The execution of the GAS model is based on two graphs, that is, a heterogeneous graph and a homogeneous graph. The heterogeneous graph is a directed bipartite graph, namely Xianyu Graph, where users and items are abstracted as nodes while comments are abstracted as edges between a user and a commented item. The homogeneous graph includes nodes abstracted by comments. The two graphs capture the local context and global context of a comment, respectively. And the GAS model can therefore identify spam comments and alleviate the impact of adversarial actions by mixing the local and global context of comments.

To identify the validity of a comment, the authors sample neighbors of the associated nodes (user and item) on both sides of the edge (comment), leveraging the time-related sampling method. As illustrated in Fig. 5, several comments form a batch for identification. To obtain the embedding of the comment e_0 , the embeddings of user u_0 and item i_0 are primarily required. Specifically, the time-related sampling method samples M comments whose published times are closest to the e_0 to compute the embedding of i_0 , for example, e_3 and e_5 . In this way, the embedding of i_0 is computed by aggregating the embedding from $\{e_3, u_1\}$ and $\{e_5, u_3\}$.

The computation of the embedding of u_0 is similar. Note that the authors use placeholders to pad the samples when the number of alternative comments is less than M. The computation of the padded placeholders is ignored in training. Typically, time-related sampling similarly corresponds to the two-phase general sampling process defined in Equation 31 but is simplified in distinguishing neighbors since they only sample edges (comments) in the Xianyu Graph.

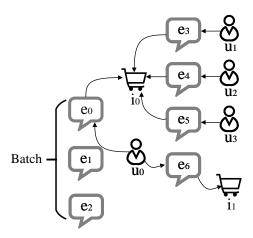


Fig. 5: Illustration on a case of time-related sampling.

The proposed heterogeneous sampling method in GAS has the following characteristics.

- \bullet Time-related. The time-related sampling method samples edges abstracted from comments based on the published time. In this way, the closest M comments in the aspect of time are sampled for aggregating embeddings of users or items.
- Reasonable. Compared with randomly sampling neighbors, the time-related sampling method samples the most related comments in terms of the publish time instead of random neighbors since the published comments have a more significant impact on the comment to be identified in a short time. Generally, comments on an item may be sparse. Therefore, when the sampling size M is greater than the number of alternative comments, the time-related sampling method uses placeholders to pad the samples instead of sampling with replacement. And the padded placeholders' computation is ignored to maintain the neighborhood distribution, which also reduces the cost in terms of training time and storage.
- 2) HetGNN: HetGNN [57] is a heterogeneous graph neural network model to handle the issue of the structural information in heterogeneous graphs and attributes or contents correlated to each node. The authors propose three critical challenges faced with heterogeneous graphs: the strategy to sample highly related neighbors in a heterogeneous distribution, the method to design an encoder for all types of nodes with heterogeneous contents, and the approach to aggregate information of heterogeneous nodes with considering the influence of the node type. Herein, we mainly focus on the heterogeneous sampling method used in HetGNN.

To solve the issue of heterogeneous neighbor sampling, HetGNN proposes a heterogeneous sampling method based on random walk with restart (RWR). Specifically, the heterogeneous sampling method starts traversal among nodes in a random walk manner. Assuming that u is an arbitrary intermediate node in the traversal while v is the start point, and the target is to get a set of nodes $\mathrm{RWR}(v)$ with a fixed length N. For each walking step, the heterogeneous sampling method performs one of the following operations with probability p: samples the neighbors of u and adds them into $\mathrm{RWR}(v)$; directly returns to the start point. The random walk process ends up with returning the $\mathrm{RWR}(v)$ with length N, and it is ensured that all types of nodes can be sampled in the random walk process. Next, the second sampling based on the sampled nodes in $\mathrm{RWR}(v)$ is to group the most related neighbors of v by the node type. The authors sample k_t neighbors in type t according to the visit frequency and take them as the most related neighbors of v in type t.

Especially, the heterogeneous sampling method performs a neighbor traversal and sifting based on a restartable random walk before sampling neighbors. Since neighbors in RWR(v) are sampled according to the visit frequency, we suppose that RWR(v) includes multiple identical neighbors for recording the visit frequency. We abstract the sampling process as:

$$N(v) = RWR(\mathcal{V}, p), \tag{32a}$$

$$E(v) = Effect(N(v), \mathcal{O}_{N(v)}), \tag{32b}$$

$$SN(v) = Sampling^{(k)}(E(v), N(v), k_t).$$
 (32c)

The proposed heterogeneous sampling method in HetGNN has the following characteristics.

- Restricted. Two principles restrict the process of random walk in the heterogeneous sampling method. Firstly, the sampling size of neighbors is restricted to a fixed number. Secondly, the number of neighbors in each type is restricted to be reasonable, ensuring all types of nodes are sampled ultimately.
- Frequency-based. The second phase of the heterogeneous sampling method samples the top k_t neighbors in type t that are most frequently visited in RWR(v). After this, the selected neighbors are grouped by the type of nodes to make the aggregate efficient since nodes in the same type include the same content features.
- 3) HGSampling: Heterogeneous Mini-Batch Graph Sampling (HGSampling) is a heterogeneous sampling method proposed in Heterogeneous Graph Transformer (HGT) [58] to train web-scale heterogeneous graphs efficiently. Specifically, HGT leverages heterogeneous graphs' meta-relations to parameterize weight matrices for several critical steps: heterogeneous mutual attention, heterogeneous message passing, and target-specific aggregation. To further handle the graph dynamics, a relative temporal encoding technique is designed to simulate dynamic dependencies for assisting HGT. Last but not the least, the authors use HGSampling to optimize the training in terms of scalability, which makes it possible that all the proposed GNN models, including HGT, can train heterogeneous graphs in an arbitrary size by using HGSampling.

Based on the fact that the number of each type of nodes and the degree distribution are dramatically different in heterogeneous graphs, HGSampling solves the issue in a balanced approach. A detailed procedure of HGSampling is given in Algorithm 12. Firstly, HGSampling initializes the sampled node set NS and a node budget B that is used to store different types of nodes separately. Next, for each node t in NS, HGSampling adds all direct neighbors of t to B and updates corresponding budgets in B (that has stored these neighbors) with the normalized degree of t. Then, HGSampling computes the sampling probability $prob[\tau]$ for each node of each type using the budget. Based on $prob[\tau]$, HGSampling samples n nodes in type τ and updates B by swapping out the already sampled nodes. Finally, after the output node set OS is padded by sampled nodes, HGSampling reconstructs the adjacency matrix with the sampled nodes. The abovementioned sampling process repeats L times to obtain a sampled subgraph that is dense and includes a similar number of nodes in different types. Compared with the general heterogeneous sampling process in Equation 31, HGSampling uses the budget B to store all direct neighbors of OS and dynamically updates Band the sampled neighbor set OS in each sampling batch. The effect on a node is quantized in the form of the sampling probability. We thereby abstract the execution process of **HGSampling** as:

$$B = GetAllNeighbors(OS),$$
 (33a)

$$P^{(k-1)}[\tau] = Convert2Prob(B), \tag{33b}$$

$$OS^{(k)}[\tau] = Sampling^{(k)}\left(B, P^{(k-1)}[\tau]\right). \tag{33c}$$

The proposed heterogeneous sampling method in HGT has the following characteristics.

- <u>Balanced</u>. The heterogeneity of graphs is distinctly reflected in the number and degree distribution among all types of nodes. HGSampling samples a similar number of nodes for each type to maintain a balanced sampling result.
- **Probability-based**. In the prior update of the budget *B*, HGSampling adds the normalized degree of a node to its neighbors stored in corresponding budgets, which alleviates the impact by some high degree nodes. In this way, nodes with higher value in the corresponding budgets are given a higher probability of being sampled.
- <u>Subgraph-induced</u>. In HGSampling, a subgraph is generated by repeating the main procedure of sampling for L times. The induced subgraph with L depth is adequately dense due to importance sampling and normalization technique, which is beneficial to variance reduction.
- 4) Text Graph Sampling: Text Graph Sampling is a heterogeneous sampling method proposed in Text Graph Transformer (TG-Transformer) [59] to construct the mini-batch for learning node representations. Since some GCN-based models for classifying texts and training heterogeneous text graphs have trouble preserving scalability and heterogeneity, the authors propose the TG-Transformer to address these issues. Specifically, TG-Transformer uses the text graph sampling to

Algorithm 12: Heterogeneous Mini-Batch Graph Sampling [58]

Require: Adjacency matrix A for each

```
\langle \tau(s), \phi(e), \tau(t) \rangle relation pair; Output node Set OS;
 Sample number n per node type; Sample depth L.
Ensure: Sampled node set NS; Sampled adjacency
 matrix \hat{A}.
NS \leftarrow OS // Initialize sampled node set as output node set.
Initialize an empty Budget B storing nodes for each node
 type with normalized degree.
for t \in NS do
    Add-In-Budget(B, t, A, NS) // Add neighbors of t to B.
end
for l \leftarrow 1 to L do
    for source node type \tau \in B do
         for source node s \in B[\tau] do
             probability for each source node s \in B[\tau] W Calculate sampling probability for each source node s of node
               type \tau.
         end
         Sample n nodes \{t_i\}_{i=1}^n from B[\tau] using prob^{(l-1)}[\tau].
         for t \in \{t_i\}_{i=1}^n do
              OS[\tau].add(t) // Add node t into Output node
              Add-In-Budget(B, t, A, NS) // Add neighbors
               of t to B.
              B[\tau].pop(t) // Remove sampled node t from
         end
    end
end
Reconstruct the sampled adjacency matrix \hat{A} among the
 sampled nodes OS from A.
return OS and \tilde{A}
```

reduce the computation cost and make the model scalable for a large-size corpus. The authors then leverage two structural encodings to capture the nodes' types and structure of the text graph and jointly add the information as the model's input. The transformer can thereby learn the target node embedding by aggregating the information from mini-batches generated by sampling.

Text graph sampling constructs mini-batches on a heterogeneous text graph $\mathcal{G} = (\mathcal{U}, \mathcal{V}, \mathcal{E}, \mathcal{F})$, where nodes \mathcal{U} and \mathcal{V} denote words and documents, respectively, while edges \mathcal{E} and \mathcal{F} represent word-document edges and word-word edges, respectively. Firstly, the intimacy matrix S of \mathcal{G} is computed by using the PageRank algorithm [70] in the following form:

$$S = \alpha \cdot \left(I - (1 - \alpha) \cdot \bar{A} \right)^{-1},\tag{34}$$

where parameter α is set as 0.15, and the normalized matrix $\bar{A} = D^{-\frac{1}{2}}AD^{-\frac{1}{2}}$. For each document node in $\mathcal V$, text graph sampling forms its context graph by sampling the most intimate k word nodes as neighbors. For each word node $\mathcal U$, text graph sampling forms its context graph by sampling totally the most intimate k neighbors, where the document node and word node each occupy a certain proportion. Detailedly, for each word node $u_i \in \mathcal U$, most intimate $k \cdot r_w(u_i)$ and $r_d(u_i)$ neighbors in the type of word and document are respectively

Method	Sampling Target	Sampling Condition	Extra Trick	
Time-related Sampling [56]	Comments (Edges)	Sample the Closest Comments	Use of Padded Placeholders	
Time-related Sampling [50]	Comments (Edges)	in terms of Publish Time	Osc of Fadded Fraceholders	
HetGNN [57]	Nodes in (random) All Types	Sample the Most Frequently	Random Walk with Restart	
TICIONN [37]	Nodes in (random) An Types	Visited Nodes in $RWR(v)$	Grouping by Types	
UCCompling [50]	Nodes in (ordered) All Types	Sampling Probability Various	Budget Stores	
HGSampling [58]	Nodes iii (oldered) Ali Types	in Different Node Types	Nodes by Types	
Text Graph Sampling [59]	Document Nodes and Word Nodes	Sample the Most Intimate	Strategy to Calculate	
	Document rough and word rough	Nodes by Types	the Intimacy Matrix	

TABLE VIII: Summary of the comparisons between heterogeneous sampling methods

sampled. The proportionality coefficients $\cdot r_w(u_i)$ and $k \cdot r_d(u_i)$ can be computed as:

$$r_w(u_i) = \frac{|\mathcal{F}(u_i)|}{|\mathcal{F}(u_i)| + |\mathcal{E}(u_i)|},\tag{35a}$$

$$r_d(u_i) = \frac{|\mathcal{E}(u_i)|}{|\mathcal{F}(u_i)| + |\mathcal{E}(u_i)|},$$
(35b)

where $\mathcal{F}(u_i)$ and $\mathcal{E}(u_i)$ denote different types of edge sets that associated with node u_i with especial intimacy score requirement. Obviously, text graph sampling satisfies the form of general heterogeneous sampling in Equation 31. Besides, it explicitly considers the sampling mechanism among word nodes and document nodes by applying proportional division.

The proposed heterogeneous sampling method in TG-Transformer has the following characteristics.

- Intimacy-based. Text graph sampling samples the most intimate k neighbors to form the context graph for each document node and word node. And each mini-batch is constructed based on sampled subgraphs (context graphs), which improves the scalability of the model when learning a large-size corpus.
- Categorized. Since nodes in the heterogeneous text graph are categorized into two types, text graph sampling performs different flows according to the node type. For document nodes, the most intimate word nodes are directly sampled to form the context graph. For word nodes, the most intimate neighbors that include a mixture of word and document nodes are proportionally sampled to form the context graph.
- 5) Comparisons within the category: In the preceding subsections, we have introduced some typical heterogeneous sampling methods. It is explicit that the common ground of these methods is to handle the heterogeneity in graphs, especially heterogeneous neighbor connection and distribution. Since most heterogeneous sampling methods are used in application-driven scenarios, the experiments and evaluations can be quite diverse. Herein, we focus on the differences in these methods' mechanisms instead of directly comparing the evaluation results. And we explain the differences between these methods in a Q&A manner. A summary of the comparisons is given in TABLE VIII.

• How do they work?

To analyze the *availability* of a sampling method, we pay special attention to some aspects in the sampling process,

that is, the sampling target and the sampling condition. Time-related sampling method samples edges from the heterogeneous graph, where edges in the graph are abstracted by comments between users and items. The sampling method proposed in HetGNN samples nodes in all types randomly as the neighbors of v and stores them in RWR(v), while HGSampling samples nodes in each type orderly with the help of the budget B. Text graph sampling samples document nodes and word nodes as neighbors to form a context graph.

As for the *efficiency*, it is unreasonable to sample neighbors randomly from a graph due to its heterogeneity. Therefore, the sampling condition then highlights its role in the sampling process. In time-related sampling, the closest comments in terms of the publish time are sampled as neighbors of the target one. In HetGNN, the most frequently visited nodes are sampled as neighbors of the node v. In HGSampling, the sampling probability is pre-computed according to corresponding budgets in B, which are based on the neighbors and the normalized degree. In text graph sampling, the most intimate nodes are sampled as neighbors for a document or word node. Distinctly, all these heterogeneous sampling methods follow a common idea: the most related neighbors are sampled with a higher probability.

• What's the special?

The scalability is a critical indicator to estimate the model performance. All of these sampling methods execute in a minibatch manner, which benefits the execution of subsequent steps, e.g., aggregation and gradient update, in the training process. Besides, there are some extra tricks: time-related sampling uses placeholders to pad the samples when the number of alternative comments is less than the required sampling size. This trick helps to maintain the neighborhood distribution and lower the computation cost. HetGNN leverages a restartable random walk strategy to select the initial neighbor set for further sampling. And the grouping trick also helps the aggregation. HGSampling designs an efficient budget B, and B can not only store the neighbors by type but also be used in computing the sampling probability. Text graph sampling computes the intimacy matrix leveraging the PageRank algorithm novelly. Obviously, all these methods have some special points to assist the original sampling.

IV. COMPARISON AND ANALYSIS

The previous section has clearly explained the mechanisms of sampling methods and put forward detailed comparisons

TABLE IX: Summary of the characteristics of sampling methods

Method	Characteristic
GraphSAGE [35]	Heuristic, Stochastic, Storage-friendly
PinSage [44]	Conditional, Storage-friendly
SSE [47]	Asynchronous, Alternating
VR-GCN [48]	Time-saving, Approximated
FastGCN [49]	Fast, Possibly-sparse
AS-GCN [50]	Adaptive, Efficient, Empirical
LADIES [51]	Layer-dependent, Importance-based
Cluster-GCN [52]	Heuristic, Scalable
Parallelized Graph Sampling [55]	Parallelizable, Scalable
GraphSAINT [53]	Flexible, Precise, Conditional
RWT [54]	Elastic, Alternative
Time-related sampling [56]	Time-related, Reasonable
HetGNN [57]	Restricted, Frequency-based
HGSampling [58]	Balanced, Probability-based, Subgraph-induced
Text Graph Sampling [59]	Intimacy-based, Categorized

TABLE X: Summary and classification of descriptions of the characteristics

Category	Characteristic	Description		
	Adaptive, Elastic,	Could benefit the method by providing more		
	Alternative, Flexible	flexible and appropriate sampling configuration		
	Time-saving, Fast	Could benefit the method by reducing		
	Time-saving, rast	the sampling size		
Computation-related	Approximated,	Could benefit the method by providing an		
Computation-related	Empirical	alternative approach for hard-to-compute metrics		
	Parallelizable,	Could benefit the method by leveraging		
	Efficient	special mechanisms in sampling or training		
	Possibly-sparse,	Could deteriorate the method by introducing		
	Stochastic	unessential or redundant computation		
	Storage-friendly,	Could benefit the method by reducing		
	Scalable	the storage requirement		
Storage-related	Reasonable	Could benefit the method by avoiding		
Storage-related	Reasonable	unimportant data for storage		
	Lavar danandant	Could weaken the efficiency of the method		
	Layer-dependent	by introducing extra data for storage		

within each category for highlighting the similarities and differences. In this section, we adequately compare the introduced sampling methods together for summary and analysis.

A. Comparison in characteristics

In the previous section, we have highlighted the characteristics of each sampling method for emphasizing similarities and differences between diverse sampling methods. Herein, we provide a summary in TABLE IX for characteristics of the introduced sampling methods. Most of the characteristics are unique to each sampling method and reflect the pros and cons of a sampling method from the computation or storage aspect. Thereby, we summarize in TABLE X for descriptions about how the characteristics affect a method from the perspective of computation or storage.

B. Comparison in applications

We divide the applications into two categories, that is, general applications and specific applications. The general

application is the basic usage of a method, where the trained model can be directly used in node classification and prediction. The specific application is the particular usage or scenario, which varies with different methods. Besides, in most works, the specific application usually corresponds to the target problem of a method. For instance, time-related sampling is designed to alleviate adversarial actions and can be applied to an industrial-level anti-spam system. A summary of these applications is shown in TABLE XI.

C. Comparison in experiments

We conduct extensive experiments of vanilla GCN and various sampling methods on common benchmark datasets (which are introduced in TABLE II) and exhibit the time-accuracy plots for comparison and analysis. As HetGNN [57] and HGSampling [58] place emphasis on different applications of the heterogeneous graph respectively and have not conducted experiments on common benchmark datasets, we do not consider conducting experiments for the two methods

TABLE XI: Summary and classification of the applications of sampling methods

	assineation of the applications of sampling methods		
Applic	cation	Method	
	Node Classification	GraphSAGE [35], SEE [47], VR-GCN [48], FastGCN [49], RWT [54],	
General Application	and Prediction	AS-GCN [50], LADIES [51], Cluster-GCN [52], HetGNN [57],	
	and Fiediction	GraphSAINT [53], Parallelized Graph Sampling [55]	
	Variance Reduction	VR-GCN [48], AS-GCN [50], LADIES [51],	
	and Elimination	FastGCN [49], GraphSAINT [53]	
	Anti-spam	Time related Compline [56]	
	Syatem	Time-related Sampling [56]	
	Text	Text Graph Sampling [59]	
	Classification	Text Graph Sampling [39]	
Specific Application	Prediction and	HCCompline [50]	
	Disambiguation	HGSampling [58]	
	Recommendation	HetGNN [57]	
	and Clustering	HEIGHN [37]	
	Recommender	DinCoop [44]	
	System	PinSage [44]	
	Algorithm	SSE [47]	
	Learning	SSE [47]	

TABLE XII: Available links and the corresponding models

Method	Available Link	Commit
GCN [21]	https://github.com/tkipf/gcn	39a4089
GraphSAGE(Cora&Pubmed) [35]	https://github.com/williamleif/graphsage-simple	d3105e5
GraphSAGE(PPI&Reddit) [35]	https://github.com/williamleif/GraphSAGE	a0fdef9
VR-GCN [48]	https://github.com/thu-ml/stochastic_gcn	da7b781
FastGCN [49]	https://github.com/matenure/FastGCN	b8e6e64
AS-GCN [50]	https://github.com/huangwb/AS-GCN	5436ecd
LADIES [51]	https://github.com/acbull/LADIES	c10b526
Cluster-GCN [52]	https://github.com/google-research/google-research/tree/master/cluster_gcn	0c1bbe5
Parallelized Graph Sampling [55]	https://github.com/ZimpleX/gcn-ipdps19	a460035
GraphSAINT [53]	https://github.com/GraphSAINT/GraphSAINT	6126102
HetGNN [57]	https://github.com/chuxuzhang/KDD2019_HetGNN	2f020ac
HGSampling [58]	https://github.com/acbull/pyHGT	e5ababa

separately for lacking the control group. Besides, we record some significant factors in GCN training to provide a detailed performance comparison, including validation accuracy, total epoch number and time cost before convergence, the proportion of sampling in the total time cost (excluding the time of loading data), and the proportion of model training (without regard to model evaluation) time in the total time cost. To impartially exhibit the impact of sampling methods in GCN training, we conduct all experiments on a two-layer GCN model and mainly use their official configurations in model training. We evaluate all the models with available code in GitHub on a Linux server equipped with dual 14-core Intel Xeon E5-2683 v3 CPUs (2.00 GHz) and an NVIDIA Tesla V100 GPU (16 GB memory). Available links and the corresponding sampling methods are listed in TABLE XII.

• Time-Accuracy Comparison

We exhibit the time (sequential training time) and accuracy (validation accuracy) comparison of various methods on benchmark datasets in Fig. 6, where GraphSAGE¹ and GraphSAGE² are different implementations proposed by their authors [35], and PGSampling¹ is short for Parallelized Graph

Sampling [55]. Note that the sequential training time we recorded includes the time of data loading and processing, the computation of critical factors (used for sampling or training), sampling, model training and evaluating. To make GCN training efficient, sampling methods improve the training by reducing computation cost and accelerating the convergence. Firstly, most sampling methods optimize the training mechanism and select part of neighbors for neighborhood representation aggregation reasonably, which reduces computation cost compared to training with entire nodes. Secondly, sampling methods use a mini-batch strategy to allow the model to be updated once per batch, which accelerates the convergence of model compared to the full-batch training.

Distinctly, most sampling methods converge faster than vanilla GCN in training. Still, some of them may require a longer time than vanilla GCN in terms of the total training cost, which can be suggested from comparisons in sequential training time on each benchmark dataset. For instance, AS-GCN [50] achieves the top accuracy but requires maximum sequential training time since the time of computing sam-

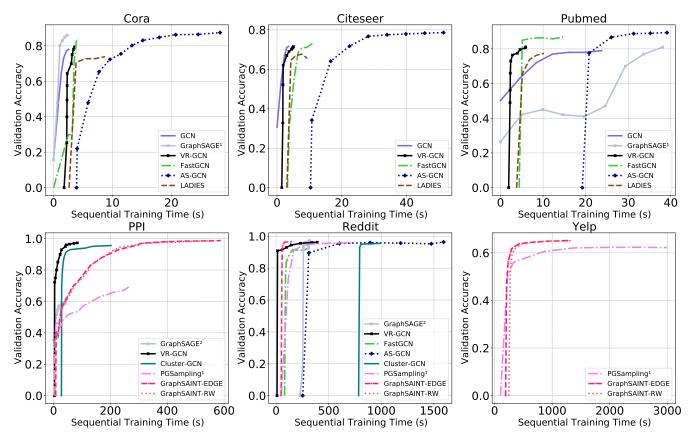


Fig. 6: Time-Accuracy comparison on benchmark datasets

pling probability and capturing layer-dependent neighboring relationships is non-negligible, which is a trade-off between time and accuracy. On the other hand, it is quite appropriate for sampling methods to handle large datasets which includes tens of thousands of nodes and millions of edges, e.g., Reddit [35] and Yelp [53]. The sampling process helps to explore the neighboring relationship and accelerate the convergence of training in a batched manner.

• Detailed Performance Comparison

Previously, we have exhibited the time-accuracy comparison on benchmark datasets, and we further compare each method on various benchmark datasets and record significant factors in model training. Detailed performance comparison is given in TABLE XIII. Specifically, we pay more attention to the following factors: validation accuracy (abbreviated as **Accuracy**), the number of training epoch before convergence (abbreviated as **Epoch**), the total time cost before convergence (abbreviated as **Total Time**), the proportion of sampling time in the total time cost (abbreviated as **Sampling** %), and the proportion of time of model training without regard to model evaluation, i.e., pure training time, in the total time cost (abbreviated as **Training** %).

Instead of simply recording the training time that includes the forward and backward propagations, we focus on the total time cost from model initialization to convergence, which is advantageous for discovering the bottleneck in terms of time during training. Formally, the sampling process mainly includes computing necessary factors for sampling, selecting nodes, and constructing the adjacency matrix for training. As a result, the sampling process is usually mixed with the process of pre-processing, which makes it hard to filter the time of sampling out separately at the code level in most instances. Thus, the **Sampling** % can be regarded as a maximum value of sampling cost in training in this sense.

Sampling methods improve GCN training by reducing the cost in terms of computation and storage, which makes it possible to extend the training to larger datasets. However, it comes from the TABLE XIII that **sampling** % is becoming a considerable value as the graph data goes larger, and can reach a comparable cost to the model training in some cases. Consequently, it is suggested that the sampling process has gradually become a non-trivial part of the training that cannot be ignored.

D. Comparison in deep models

In the previous section, extensive experiments of various sampling methods have been conducted on the two-layer model for comparison. Further, we consider the performance of sampling-based methods in converged sequential training time and validation accuracy on deep models. We thereby conduct experiments of node-wise sampling methods and subgraph-based sampling methods on deep models, i.e., VR-GCN [48] and Cluster-GCN [52], since the current layerwise sampling methods do not support the modification of the model depth. Time (sequential training time) and accuracy

TABLE XIII: Detailed performance comparison on sampling methods

Method	Dataset	Hyperparameters ⁴	Accuracy	Epoch	Total Time	Sampling%	Training%
	Cora	- / Adam / 0.01	0.814	110 ± 20	$4.80 \pm 0.42s$	-	66.20%
GCN [21]	Citeseer	- / Adam / 0.01	0.711	90 ± 10	$5.44 \pm 0.30s$	-	57.60%
	Pubmed	- / Adam / 0.01	0.786	120 ± 10	$24.77 \pm 1.96s$	-	43.10%
	Cora	5&5 / SGD / 0.7	0.856	90 ± 10	$3.27 \pm 0.21s$	14.16%	61.80%
Cromb CACE [25]	Pubmed	10&25 /SGD / 0.7	0.814	170 ± 10	$37.94 \pm 2.12s$	24.06%	71.70%
GraphSAGE [35]	PPI	25&10 / Adam / 0.01	0.616	83 ± 10	$47.51 \pm 5.90s$	34.4%	28.20%
	Reddit	25&10 / Adam / 0.01	0.950	15 ± 5	$326.73 \pm 31.99s$	12.40%	67.3%
	Cora	2 / Adam / 0.01	0.800	76 ± 9	$3.65 \pm 0.18s$	1.23%	24.26%
	Citeseer	2 / Adam / 0.01	0.718	140 ± 7	$5.07 \pm 0.17s$	0.92%	23.04%
VR-GCN [48]	Pubmed	2 / Adam / 0.01	0.814	111 ± 4	$5.92 \pm 0.13s$	0.80%	15.16%
	PPI	2 / Adam / 0.01	0.975	291 ± 7	$83.50 \pm 2.1s$	3.67%	50.73%
	Reddit	2 / Adam / 0.01	0.963	86 ± 9	$390.62 \pm 39.63s$	13.26%	84.63%
	Cora	50 / Adam / 0.01	0.847	65 ± 10	$3.93 \pm 0.15s$	1.80%	74.90%
FastGCN [49]	Citeseer	50 / Adam / 0.01	0.776	90 ± 5	$10.65 \pm 0.42s$	0.94%	30.90%
rasiden [49]	Pubmed	50 / Adam / 0.01	0.863	40 ± 5	$13.71 \pm 1.21s$	10.73%	46.70%
	Reddit	100 / Adam / 0.001	0.928	30 ± 3	294.52 ± 21.06s	32.40%	28.90%
	Cora	128 / Adam / 0.001	0.877	262 ± 10	$28.50 \pm 0.93 \text{ s}$	29.66%	69.60%
AS-GCN [50]	Citeseer	128 / Adam / 0.001	0.791	106 ± 10	$46.64 \pm 3.87s$	14.60%	35.70%
AS-GCN [50]	Pubmed	128 / Adam / 0.001	0.895	15 ± 5	$39.06 \pm 6.64s$	30.10%	43.80%
	Reddit	512 / Adam / 0.01	0.965	23 ± 10	$1633.67 \pm 581.74s$	26.21%	27.20%
	Cora	64 / Adam / 0.001	0.761	9 ± 1	$6.10 \pm 0.55s$	1.10%	93.40%
LADIES [51]	Citeseer	64 / Adam / 0.001	0.674	9 ± 1	$6.2\pm0.57s$	1.01%	93.00%
	Pubmed	64 / Adam / 0.001	0.757	10 ± 1	$6.386 \pm 0.56s$	1.72%	90.90%
Cluster-GCN ⁵ [52]	PPI	- / Adam / 0.01	0.958	360 ± 10	$202.25\pm4.84s$	9.60%	53.30%
Cluster-OCIV [32]	Reddit	- / Adam / 0.005	0.958	27 ± 3	$981.76 \pm 20.55s$	42.70%	20.10%
Parallelized Graph	PPI	8000 / Adam / 0.05	0.68	134 ± 10	$267.77 \pm 19.71s$	22.70%	30.30%
Sampling [55]	Reddit	8000 / Adam / 0.05	0.959	12 ± 2	$822.52 \pm 109.69s$	11.10%	8.00%
	Yelp	4000 / Adam / 0.01	0.617	27 ± 4	$3113.03 \pm 424.96s$	33.40%	17.50%
GraphSAINT	PPI	4000 / Adam / 0.01	0.988	780 ± 20	$587.93 \pm 14.74s$	6.50%	62.10%
EDGE ⁶ [53]	Reddit	600 / Adam / 0.01	0.967	37 ± 3	$143.67 \pm 5.90s$	26.80%	17.60%
EDOE: [33]	Yelp	2500 / Adam / 0.01	0.653	95 ± 5	$1178.38 \pm 56.22s$	12.80%	35.80%
GraphSAINT	PPI	6000 / Adam / 0.01	0.987	740 ± 20	550.08 ± 14.65s	7.00%	62.00%
RW [53]	Reddit	8000 / Adam / 0.01	0.967	26 ± 4	$123.95 \pm 9.82s$	28.70%	21.80%
KW [33]	Yelp	2500 / Adam / 0.01	0.653	67 ± 8	1207.58 ± 126.25 s	16.20%	47.50%

Note⁴: All experiments are conducted on the two-layer GCN with their official configurations, e.g., sampling size and optimizer. As some parameters are not explicitly specified in some papers, we tune the parameters to achieve better accuracy. The recorded hyperparameters include the sampling size (per node/layer/subgraph), the optimizer, and the learning rate.

Note⁵: In Cluster-GCN, they provided the number of clusters for training, validation, and test rather than the sampling size per subgraph.

Note⁶: In GraphSAINT-EDGE, the sampling size corresponding to the number of edges to be sampled.

(validation accuracy) comparisons of node-wise and subgraph-based sampling methods on the deep model (model depth varies from 2 to 5) are illustrated in Fig. 7. Note that the configurations for sampling and training of VR-GCN and Cluster-GCN are given in the "Hyperparameters" column in TABLE XIII.

Generally, for VR-GCN (node-wise sampling), the sequential training time increases as the model becomes deeper, and the validation accuracy decreases as the number of the model depth increases. Distinctively, on the PPI [61] dataset, VR-GCN converges fast on the five-layer model since the validation accuracy converges to a relatively low value (0.725) and will not be increased further. For Cluster-GCN (subgraph-based sampling), the sequential training time increases as the model depth increases, while the validation accuracy is slightly

improved or remaines stable.

Practically, constructing a deep GCN model by simply adding more layers will suffer from the problem of vanishing gradient, which is also known as the phenomenon of over-smoothing. In this case, the converged features of nodes in a graph eventually become the same value, which deteriorates the model ability in various graph-based tasks [71, 72]. Therefore, the validation accuracy of VR-GCN is generally declining as the model becomes deeper. However, Cluster-GCN preserves a relatively stable validation accuracy since it additionally uses a diagonal enhancement technique to improve the training in the deep model.

In summary, the sequential training time on the deep model is generally increasing, and the validation accuracy is generally declining unless the additional technique on overcoming the

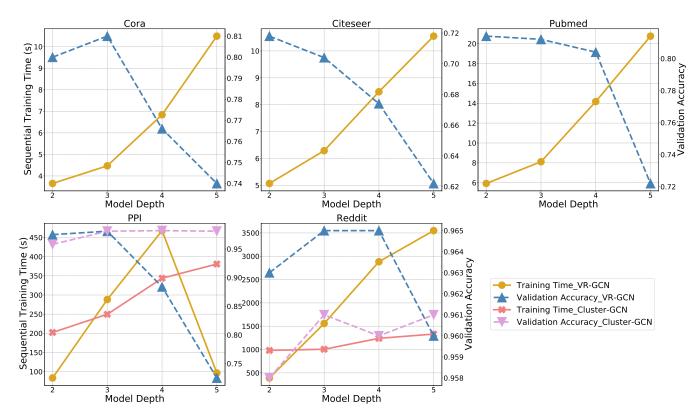


Fig. 7: Time-Accuracy comparison of node-wise and subgraph-based sampling methods on deep models.

phenomenon of over-smoothing is added.

E. Comparison in overall

A comprehensive summary of overall comparison on sampling methods in all categories is given in TABLE XIV, and we pay special attention to the following aspects.

• Random Sampling

It denotes whether a sampling method samples nodes in a random manner. Random neighbor sampling is widely used in node-wise sampling methods to guarantee randomness and uniformity since every node of the same type can be considered with equal probability. Besides, subgraph-based sampling methods likewise randomly sample nodes to generate subgraphs. In some situations, we cannot directly perform random sampling. For example, when handling heterogeneous graphs, the heterogeneity of nodes and edges should be well considered. On the other hand, sampling with probability is adequately used in layer-wise sampling methods for reducing variance. Moreover, some methods sample nodes in an ordered pattern, where the sampling standard is defined by some metrics, such as visit frequency and publish time.

• Sampling Condition

It denotes the specific sampling condition of each sampling method. To show the similarities between different methods, we simply highlight the characteristics of the sampling operation, for example, we define both the sampling conditions of AS-GCN and LADIES as layer-dependent sampling though the two are slightly different throughout the sampling process. This unified definition is conducive to classifying and analyzing methods based on similarities and differences.

• Target Problem

It denotes the target problem being solved in each work. To analyze a work comprehensively, we should focus on not only the sampling algorithm, but also the difficulty to be solved by sampling and the target problem of the work. Besides, the target problem is closely related to the motivation of a work. For example, most layer-wise sampling methods are proposed to alleviate neighbor explosion caused by recursive neighbor sampling. And most heterogeneous sampling methods are devoted to learning representation in heterogeneous graphs. In this way, the key idea of a work can therefore be comprehended by jointly considering the sampling condition and the target problem.

V. CHALLENGES AND FUTURE DIRECTIONS

In this section, we discuss some challenges and future research directions of sampling methods. Although sampling methods accelerate the training of GCN efficiently and reduce the cost of training in terms of computation and storage, there are still challenges due to some factors in graphs' characteristics and training.

Firstly, sampling methods inevitably introduce *variance* and *bias* into the training compared with the exact training approach. In most instances, it is challenging to achieve an appropriate trade-off between accuracy and runtime. Secondly, as graphs grow large and complex, sampling methods are enhancing the requirements in computation and storage for *experimental platforms*. Thirdly, it is significant to take the *hardware* into consideration when performing sampling methods to GCN since the hardware is getting increasingly

TABLE XIV: Comprehensive summary of sampling methods in all categories

Category	Method	Random Sampling	Sampling Condition	Target Problem
Node-wise Sampling	GraphSAGE [35]	\checkmark	Random Neighbor Sampling	Inductive Learning
	PinSage [44]	×	Normalized Visit Counts	Scaling up GCN
	SSE [47]	√	Random	Steady-state Condition
			Neighbor Sampling	Learning
	VR-GCN [48]	\checkmark	Random	Receptive Field
			Neighbor Sampling	Reduction
Layer-wise Sampling	FastGCN [49]	×	Layer-independent	Neighbor Explosion
			Sampling	Alleviation
	AS-GCN [50]	×	Layer-dependent	Neighbor Explosion
			Sampling	Alleviation
	LADIES [51]	×	Layer-dependent	Sparse Connection
			Sampling	Alleviation
Subgraph-based Sampling	Cluster-GCN [52]	\checkmark	Random	Constructing
			Cluster Sampling	Graph Partition
	Parallelized Graph	\checkmark	Parallel	Model parallelizing
	Sampling [55]		Frontier Sampling	and Scaling up
	GraphSAINT [53]	×	Probabilistic	Constructing Unbiased
			Edge Sampling	Subgraph Sampling
	RWT [54]	\checkmark	Random	Handling Node Relation
			Neighbor Expansion	and Over-smoothing
Heterogeneous Sampling	Time-related	×	Publish Time	Adversarial Action
	Sampling [56]			Alleviation
	HetGNN [57]	×	Visit Frequency	Heterogeneous Graph
				Learning
	HGSampling [58]	×	Probabilistic Sampling	Heterogeneous Graph
			Nodes by Type	Learning
	Text Graph	×	Intimacy Matrix	Heterogeneous Text
	Sampling [59]			Graph Learning

important in GCN training. Fourthly, some sampling methods designed for homogeneous graphs can hardly be directly applied to *heterogeneous graphs*. Moreover, stacking more layers to form a *deeper GCN* model is an emerging trend for improving performance. Performing sampling on deep models is a challenging task. Therefore, there is still room for improvement of sampling methods. Next, we suggest some potential directions of sampling methods in the future.

• Variance reduction and elimination

Instead of training GCN with all nodes in a graph, sampling methods accelerate the training by conditionally selecting partial nodes and bring about, where it is unavoidable, a slight accuracy loss. To solve the problem, some existing sampling methods leverage importance sampling technique to reduce variance [49–51], while others reduce variance by adding special mechanisms [48, 52, 53, 58, 73]. Besides, it is promising to execute variance reduction in an explicit manner. For instance, AS-GCN [50] and MVS-GNN [73] adaptively sample nodes and explicitly reduce variance in the training of GCN. Therefore, we suggest optimizing sampling methods with variance reduction and elimination techniques. Through this way, it is feasible to build time-saving sampling methods with better accuracy than exact training approachs.

• Co-ordination with experimental platforms

Taking full advantage of experimental platforms benefits the training and inference of GCN significantly. Recently, instead of merely performing GCN on GPU (CPU), various experimental platforms are used for accelerating training and inference of GCN, for instance, paralleled platform [55], (multi-) FPGA platform [74–76], and heterogeneous platform [77, 78]. On the other hand, the costs in terms of computation and storage of sampling methods are growing large as the explosion of the graph size, putting pressure on existing experimental platforms. All these put forward a higher demand to enhance co-ordination with experimental platforms. Therefore, we suggest optimizing sampling methods by leveraging characteristics and advantages of experimental platforms. It is also useful to design a fitting sampling method for a specified experimental platform.

• Hardware-friendly sampling

In recent years, a few works have been proposed to optimize GCN based on the specific hardware design. Most of these works accelerate the inference process or a certain phase in the training of GCN leveraging hardware characteristics and specially designed tools [43, 74, 78–82]. For instance, Hygcn [43] accelerates the inference process by optimizing two processing engines in inference with the help of an inter-engine pipeline and a priority-based memory access coordination. However, the sampling phase is gradually becoming a time-consuming process with the drastic extension of graph data, which affects the execution efficiency of the training to a large extent. Just as these accelerators use hardware characteristics to speed up

the inference process, we suggest accelerating the sampling process using hardware characteristics. And this raises the question of what characteristics should be carefully considered to design a hardware-friendly sampling method.

• Heterogeneous graph sampling

Recently, there has been a growing trend in the study of heterogeneity of graphs. Compared with homogeneous graphs, heterogeneous graphs are superior to model complex structures of graphs in the real world, for instance, Xianyu Graph [56] and Open Academic Graph (OAG) [83]. However, heterogeneous graphs typically include edges and nodes in different types [57, 84], and most existing sampling methods designed for homogeneous graphs cannot be directly used since applying these sampling methods to heterogeneous graphs may lead to an imbalanced sampling result in terms of different types of nodes and edges [58]. As a result, there is an urgent need to extend original sampling methods to heterogeneous graphs. We suggest improving the original sampling method by merging the characteristics of several sampling methods in different categories. It is also useful to design a novel sampling method for a specific heterogeneous graph.

• Sampling in deep models

Deep GCNs are attracting more attention and are intuitively regarded as a potentiality for improving model capability since constructing a deep structure helps CNNs achieve outstanding performance in tasks of diverse fields [85–87]. However, it has been theoretically demonstrated that GCN [21] is not applicable to scale a deep model due to the phenomenon of oversmoothing [88, 89]. Thereby, various approaches are proposed to overcome the phenomenon of over-smoothing for enabling deep GCNs training, e.g., adding skip connections [46, 50, 71], using regularization techniques [88, 90], and concatenating multi-scale information [91-93]. Most of these approaches target alleviating destructive impact from over-smoothing by modifying models or leveraging extra techniques. We argue that sampling methods could also benefit the address of oversmoothing. For instance, SHADOW-GNN [94] applies shallow subgraph-based sampling methods to deep GCNs to guarantee the unique aggregation of any two nodes and preserve node feature information, which helps avoid the damage to the diversity of the converged aggregation features. Thereby, we suggest designing suitable sampling methods according to the model depth and aggregation mechanism for overcoming the phenomenon of over-smoothing synergistically.

VI. CONCLUSION

In this paper, we conduct a thorough survey on sampling methods for efficient training of GCN. Specifically, we provide a taxonomy that categorizes sampling methods into four categories, i.e., node-wise sampling, layer-wise sampling, subgraph-based sampling, and heterogeneous sampling. Based on the taxonomy, we compare sampling methods from multiple aspects and highlight their characteristics for each category. Finally, we discuss challenges faced by the existing sampling methods and suggest five potential directions of research.

REFERENCES

- [1] A. M. Fout, "Protein interface prediction using graph convolutional networks," Ph.D. dissertation, Colorado State University, 2017.
- [2] S. Guo, Y. Lin, N. Feng, C. Song, and H. Wan, "Attention based spatial-temporal graph convolutional networks for traffic flow forecasting," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 33, no. 01, 2019, pp. 922–929.
- [3] Z. Cui, K. Henrickson, R. Ke, and Y. Wang, "Traffic graph convolutional recurrent neural network: A deep learning framework for network-scale traffic learning and forecasting," *IEEE Transactions on Intelligent Trans*portation Systems, vol. 21, no. 11, pp. 4883–4894, 2019.
- [4] Z. Wang, Q. Lv, X. Lan, and Y. Zhang, "Cross-lingual knowledge graph alignment via graph convolutional networks," in *Proceedings of the 2018 Conference on Em*pirical Methods in Natural Language Processing, 2018, pp. 349–357.
- [5] C. Shang, Y. Tang, J. Huang, J. Bi, X. He, and B. Zhou, "End-to-end structure-aware convolutional networks for knowledge base completion," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 33, no. 01, 2019, pp. 3060–3067.
- [6] J. Zhou, G. Cui, S. Hu, Z. Zhang, C. Yang, Z. Liu, L. Wang, C. Li, and M. Sun, "Graph neural networks: A review of methods and applications," *AI Open*, vol. 1, pp. 57–81, 2020.
- [7] F. Scarselli, M. Gori, A. C. Tsoi, M. Hagenbuchner, and G. Monfardini, "The graph neural network model," *IEEE transactions on neural networks*, vol. 20, no. 1, pp. 61–80, 2008.
- [8] P. W. Battaglia, J. B. Hamrick, V. Bapst, A. Sanchez-Gonzalez, V. Zambaldi, M. Malinowski, A. Tacchetti, D. Raposo, A. Santoro, R. Faulkner *et al.*, "Relational inductive biases, deep learning, and graph networks," *arXiv preprint arXiv:1806.01261*, 2018.
- [9] H. Akita, K. Nakago, T. Komatsu, Y. Sugawara, S.i. Maeda, Y. Baba, and H. Kashima, "Bayesgrad: Explaining predictions of graph convolutional networks," in *International Conference on Neural Information Pro*cessing. Springer, 2018, pp. 81–92.
- [10] R. Ying, D. Bourgeois, J. You, M. Zitnik, and J. Leskovec, "Gnnexplainer: Generating explanations for graph neural networks," *Advances in neural information* processing systems, vol. 32, p. 9240, 2019.
- [11] F. Baldassarre and H. Azizpour, "Explainability techniques for graph convolutional networks," *arXiv* preprint *arXiv*:1905.13686, 2019.
- [12] P. E. Pope, S. Kolouri, M. Rostami, C. E. Martin, and H. Hoffmann, "Explainability methods for graph convolutional neural networks," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019, pp. 10772–10781.
- [13] K. Xu, J. Li, M. Zhang, S. S. Du, K.-i. Kawarabayashi, and S. Jegelka, "What can neural networks reason about?" *arXiv preprint arXiv:1905.13211*, 2019.

- [14] H. Yuan, H. Yu, S. Gui, and S. Ji, "Explainability in graph neural networks: A taxonomic survey," *arXiv preprint arXiv:2012.15445*, 2020.
- [15] Y. Li, D. Tarlow, M. Brockschmidt, and R. Zemel, "Gated graph sequence neural networks," *arXiv preprint* arXiv:1511.05493, 2015.
- [16] M. Henaff, J. Bruna, and Y. LeCun, "Deep convolutional networks on graph-structured data," *arXiv preprint arXiv:1506.05163*, 2015.
- [17] J. Atwood and D. Towsley, "Diffusion-convolutional neural networks," in *Advances in neural information* processing systems, 2016, pp. 1993–2001.
- [18] P. Veličković, G. Cucurull, A. Casanova, A. Romero, P. Liò, and Y. Bengio, "Graph Attention Networks," *International Conference on Learning Representations*, 2018, accepted as poster. [Online]. Available: https://openreview.net/forum?id=rJXMpikCZ
- [19] M. Defferrard, X. Bresson, and P. Vandergheynst, "Convolutional neural networks on graphs with fast localized spectral filtering," *Advances in neural information processing systems*, vol. 29, pp. 3844–3852, 2016.
- [20] M. Niepert, M. Ahmed, and K. Kutzkov, "Learning convolutional neural networks for graphs," in *International conference on machine learning*. PMLR, 2016, pp. 2014–2023.
- [21] T. N. Kipf and M. Welling, "Semi-supervised classification with graph convolutional networks," in *International Conference on Learning Representations (ICLR)*, 2017.
- [22] F. Monti, D. Boscaini, J. Masci, E. Rodola, J. Svoboda, and M. M. Bronstein, "Geometric deep learning on graphs and manifolds using mixture model cnns," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017, pp. 5115–5124.
- [23] J. Bruna, W. Zaremba, A. Szlam, and Y. LeCun, "Spectral networks and locally connected networks on graphs," arXiv preprint arXiv:1312.6203, 2013.
- [24] F. Wu, A. Souza, T. Zhang, C. Fifty, T. Yu, and K. Weinberger, "Simplifying graph convolutional networks," in International conference on machine learning. PMLR, 2019, pp. 6861–6871.
- [25] X. He, K. Deng, X. Wang, Y. Li, Y. Zhang, and M. Wang, "Lightgen: Simplifying and powering graph convolution network for recommendation," in *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, 2020, pp. 639–648.
- [26] H. Nt and T. Maehara, "Revisiting graph neural networks: All we have is low-pass filters," *arXiv preprint arXiv:1905.09550*, 2019.
- [27] Y. Yang, J. Qiu, M. Song, D. Tao, and X. Wang, "Distilling knowledge from graph convolutional networks," in Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, 2020, pp. 7074–7083.
- [28] C. Yang, J. Liu, and C. Shi, "Extract the knowledge of graph neural networks and go beyond it: An effective knowledge distillation framework," in *Proceedings of the Web Conference 2021*, 2021, pp. 1227–1237.
- [29] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, and

- S. Y. Philip, "A comprehensive survey on graph neural networks," *IEEE transactions on neural networks and learning systems*, vol. 32, no. 1, pp. 4–24, 2020.
- [30] Z. Zhang, P. Cui, and W. Zhu, "Deep learning on graphs: A survey," *IEEE Transactions on Knowledge and Data Engineering*, 2020.
- [31] S. Zhang, H. Tong, J. Xu, and R. Maciejewski, "Graph convolutional networks: a comprehensive review," *Computational Social Networks*, vol. 6, no. 1, pp. 1–23, 2019.
- [32] Y. LeCun, Y. Bengio *et al.*, "Convolutional networks for images, speech, and time series," *The handbook of brain theory and neural networks*, vol. 3361, no. 10, p. 1995, 1995.
- [33] D. I. Shuman, S. K. Narang, P. Frossard, A. Ortega, and P. Vandergheynst, "The emerging field of signal processing on graphs: Extending high-dimensional data analysis to networks and other irregular domains," *IEEE signal processing magazine*, vol. 30, no. 3, pp. 83–98, 2013.
- [34] J. Gilmer, S. S. Schoenholz, P. F. Riley, O. Vinyals, and G. E. Dahl, "Neural message passing for quantum chemistry," in *International conference on machine learning*. PMLR, 2017, pp. 1263–1272.
- [35] W. L. Hamilton, R. Ying, and J. Leskovec, "Inductive representation learning on large graphs," in *Proceedings of the 31st International Conference on Neural Information Processing Systems*, 2017, pp. 1025–1035.
- [36] A. Qin, Z. Shang, J. Tian, Y. Wang, T. Zhang, and Y. Y. Tang, "Spectral–spatial graph convolutional networks for semisupervised hyperspectral image classification," *IEEE Geoscience and Remote Sensing Letters*, vol. 16, no. 2, pp. 241–245, 2018.
- [37] C. Wang, B. Samari, and K. Siddiqi, "Local spectral graph convolution for point set feature learning," in *Proceedings of the European conference on computer vision (ECCV)*, 2018, pp. 52–66.
- [38] D. Valsesia, G. Fracastoro, and E. Magli, "Learning localized generative models for 3d point clouds via graph convolution," in *International conference on learning representations*, 2018.
- [39] Y. Wei, X. Wang, L. Nie, X. He, R. Hong, and T.-S. Chua, "Mmgcn: Multi-modal graph convolution network for personalized recommendation of micro-video," in *Proceedings of the 27th ACM International Conference* on Multimedia, 2019, pp. 1437–1445.
- [40] S. Cui, B. Yu, T. Liu, Z. Zhang, X. Wang, and J. Shi, "Edge-enhanced graph convolution networks for event detection with syntactic relation," in *Proceedings of* the 2020 Conference on Empirical Methods in Natural Language Processing: Findings, 2020, pp. 2329–2339.
- [41] Z. Liang, M. Yang, L. Deng, C. Wang, and B. Wang, "Hierarchical depthwise graph convolutional neural network for 3d semantic segmentation of point clouds," in 2019 International Conference on Robotics and Automation (ICRA). IEEE, 2019, pp. 8152–8158.
- [42] H. Yang, "Aligraph: A comprehensive graph neural network platform," in *Proceedings of the 25th ACM SIGKDD international conference on knowledge discov-*

- ery & data mining, 2019, pp. 3165-3166.
- [43] M. Yan, L. Deng, X. Hu, L. Liang, Y. Feng, X. Ye, Z. Zhang, D. Fan, and Y. Xie, "Hygcn: A gcn accelerator with hybrid architecture," in 2020 IEEE International Symposium on High Performance Computer Architecture (HPCA). IEEE, 2020, pp. 15–29.
- [44] R. Ying, R. He, K. Chen, P. Eksombatchai, W. L. Hamilton, and J. Leskovec, "Graph convolutional neural networks for web-scale recommender systems," in *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 2018, pp. 974–983.
- [45] K. Xu, W. Hu, J. Leskovec, and S. Jegelka, "How powerful are graph neural networks?" in *International Conference on Learning Representations*, 2019. [Online]. Available: https://openreview.net/forum?id=ryGs6iA5Km
- [46] K. Xu, C. Li, Y. Tian, T. Sonobe, K.-i. Kawarabayashi, and S. Jegelka, "Representation learning on graphs with jumping knowledge networks," in *International Conference on Machine Learning*. PMLR, 2018, pp. 5453–5462.
- [47] H. Dai, Z. Kozareva, B. Dai, A. Smola, and L. Song, "Learning steady-states of iterative algorithms over graphs," in *International conference on machine learning*. PMLR, 2018, pp. 1106–1114.
- [48] J. Chen, J. Zhu, and L. Song, "Stochastic training of graph convolutional networks with variance reduction," in *International Conference on Machine Learning*, 2018, pp. 941–949.
- [49] J. Chen, T. Ma, and C. Xiao, "Fastgcn: Fast learning with graph convolutional networks via importance sampling," in *International Conference on Learning Representations*, 2018.
- [50] W. Huang, T. Zhang, Y. Rong, and J. Huang, "Adaptive sampling towards fast graph representation learning," *Advances in Neural Information Processing Systems*, vol. 31, pp. 4558–4567, 2018.
- [51] D. Zou, Z. Hu, Y. Wang, S. Jiang, Y. Sun, and Q. Gu, "Layer-dependent importance sampling for training deep and large graph convolutional networks," *Advances in neural information processing systems*, 2019.
- [52] W.-L. Chiang, X. Liu, S. Si, Y. Li, S. Bengio, and C.-J. Hsieh, "Cluster-gcn: An efficient algorithm for training deep and large graph convolutional networks," in *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 2019, pp. 257–266.
- [53] H. Zeng, H. Zhou, A. Srivastava, R. Kannan, and V. Prasanna, "GraphSAINT: Graph sampling based inductive learning method," in *International Conference on Learning Representations*, 2020.
- [54] J. Bai, Y. Ren, and J. Zhang, "Ripple walk training: A subgraph-based training framework for large and deep graph neural network," *arXiv preprint arXiv:2002.07206*, 2020.
- [55] H. Zeng, H. Zhou, A. Srivastava, R. Kannan, and V. Prasanna, "Accurate, efficient and scalable graph

- embedding," in 2019 IEEE International Parallel and Distributed Processing Symposium (IPDPS). IEEE, 2019, pp. 462–471.
- [56] A. Li, Z. Qin, R. Liu, Y. Yang, and D. Li, "Spam review detection with graph convolutional networks," in Proceedings of the 28th ACM International Conference on Information and Knowledge Management, 2019, pp. 2703–2711.
- [57] C. Zhang, D. Song, C. Huang, A. Swami, and N. V. Chawla, "Heterogeneous graph neural network," in *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 2019, pp. 793–803.
- [58] Z. Hu, Y. Dong, K. Wang, and Y. Sun, "Heterogeneous graph transformer," in *Proceedings of The Web Conference* 2020, 2020, pp. 2704–2710.
- [59] H. Zhang and J. Zhang, "Text graph transformer for document classification," in Conference on Empirical Methods in Natural Language Processing (EMNLP), 2020.
- [60] P. Sen, G. Namata, M. Bilgic, L. Getoor, B. Galligher, and T. Eliassi-Rad, "Collective classification in network data," *AI magazine*, vol. 29, no. 3, pp. 93–93, 2008.
- [61] M. Zitnik and J. Leskovec, "Predicting multicellular function through multi-layer tissue networks," *Bioinfor*matics, vol. 33, no. 14, pp. i190–i198, 2017.
- [62] J. McAuley, C. Targett, Q. Shi, and A. Van Den Hengel, "Image-based recommendations on styles and substitutes," in *Proceedings of the 38th international ACM* SIGIR conference on research and development in information retrieval, 2015, pp. 43–52.
- [63] T. Mikolov, I. Sutskever, K. Chen, G. S. Corrado, and J. Dean, "Distributed representations of words and phrases and their compositionality," in *Advances in neural information processing systems*, 2013, pp. 3111–3119.
- [64] Y. Bengio, J. Louradour, R. Collobert, and J. Weston, "Curriculum learning," in *Proceedings of the 26th annual international conference on machine learning*, 2009, pp. 41–48.
- [65] C. Eksombatchai, P. Jindal, J. Z. Liu, Y. Liu, R. Sharma, C. Sugnet, M. Ulrich, and J. Leskovec, "Pixie: A system for recommending 3+ billion items to 200+ million users in real-time," in *Proceedings of the 2018 world wide web* conference, 2018, pp. 1775–1784.
- [66] Z. Liu, Z. Wu, Z. Zhang, J. Zhou, S. Yang, L. Song, and Y. Qi, "Bandit samplers for training graph neural networks," *arXiv preprint arXiv:2006.05806*, 2020.
- [67] G. Karypis and V. Kumar, "A fast and high quality multilevel scheme for partitioning irregular graphs," SIAM Journal on scientific Computing, vol. 20, no. 1, pp. 359–392, 1998.
- [68] I. S. Dhillon, Y. Guan, and B. Kulis, "Weighted graph cuts without eigenvectors a multilevel approach," *IEEE* transactions on pattern analysis and machine intelligence, vol. 29, no. 11, pp. 1944–1957, 2007.
- [69] B. Ribeiro and D. Towsley, "Estimating and sampling graphs with multidimensional random walks," in Pro-

- ceedings of the 10th ACM SIGCOMM conference on Internet measurement, 2010, pp. 390–403.
- [70] J. Zhang, H. Zhang, C. Xia, and L. Sun, "Graph-bert: Only attention is needed for learning graph representations," *arXiv preprint arXiv:2001.05140*, 2020.
- [71] G. Li, M. Muller, A. Thabet, and B. Ghanem, "Deep-gens: Can gens go as deep as cnns?" in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2019, pp. 9267–9276.
- [72] Q. Li, Z. Han, and X.-M. Wu, "Deeper insights into graph convolutional networks for semi-supervised learning," in *Thirty-Second AAAI conference on artificial intelligence*, 2018.
- [73] W. Cong, R. Forsati, M. Kandemir, and M. Mahdavi, "Minimal variance sampling with provable guarantees for fast training of graph neural networks," in *Proceedings* of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, 2020, pp. 1393– 1403.
- [74] Q. Cheng, M. Wen, J. Shen, D. Wang, and C. Zhang, "Towards a deep-pipelined architecture for accelerating deep gcn on a multi-fpga platform," in *International Conference on Algorithms and Architectures for Parallel Processing*. Springer, 2020, pp. 528–547.
- [75] B. Zhang, H. Zeng, and V. Prasanna, "Hardware acceleration of large scale gcn inference," in 2020 IEEE 31st International Conference on Application-specific Systems, Architectures and Processors (ASAP). IEEE, 2020, pp. 61–68.
- [76] —, "Accelerating large scale gcn inference on fpga," in 2020 IEEE 28th Annual International Symposium on Field-Programmable Custom Computing Machines (FCCM). IEEE, 2020, pp. 241–241.
- [77] Y. Meng, S. Kuppannagari, and V. Prasanna, "Accelerating proximal policy optimization on cpu-fpga heterogeneous platforms," in 2020 IEEE 28th Annual International Symposium on Field-Programmable Custom Computing Machines (FCCM). IEEE, 2020, pp. 19–27.
- [78] H. Zeng and V. Prasanna, "Graphact: Accelerating gcn training on cpu-fpga heterogeneous platforms," in *Pro*ceedings of the 2020 ACM/SIGDA International Symposium on Field-Programmable Gate Arrays, 2020, pp. 255–265.
- [79] T. Geng, A. Li, R. Shi, C. Wu, T. Wang, Y. Li, P. Haghi, A. Tumeo, S. Che, S. Reinhardt et al., "Awb-gcn: A graph convolutional network accelerator with runtime workload rebalancing," in 2020 53rd Annual IEEE/ACM International Symposium on Microarchitecture (MICRO). IEEE, 2020, pp. 922–936.
- [80] A. Auten, M. Tomei, and R. Kumar, "Hardware acceleration of graph neural networks," in 2020 57th ACM/IEEE Design Automation Conference (DAC). IEEE, 2020, pp. 1–6.
- [81] S. Liang, Y. Wang, C. Liu, L. He, L. Huawei, D. Xu, and X. Li, "Engn: A high-throughput and energy-efficient accelerator for large graph neural networks," *IEEE Transactions on Computers*, 2020.
- [82] K. Kiningham, C. Re, and P. Levis, "Grip: a graph

- neural network accelerator architecture," arXiv preprint arXiv:2007.13828, 2020.
- [83] F. Zhang, X. Liu, J. Tang, Y. Dong, P. Yao, J. Zhang, X. Gu, Y. Wang, B. Shao, R. Li et al., "Oag: Toward linking large-scale heterogeneous entity graphs," in Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, 2019, pp. 2585–2595.
- [84] R. Hussein, D. Yang, and P. Cudré-Mauroux, "Are metapaths necessary? revisiting heterogeneous graph embeddings," in *Proceedings of the 27th ACM International Conference on Information and Knowledge Management*, 2018, pp. 437–446.
- [85] H.-C. Shin, H. R. Roth, M. Gao, L. Lu, Z. Xu, I. Nogues, J. Yao, D. Mollura, and R. M. Summers, "Deep convolutional neural networks for computer-aided detection: Cnn architectures, dataset characteristics and transfer learning," *IEEE transactions on medical imaging*, vol. 35, no. 5, pp. 1285–1298, 2016.
- [86] K. Zhang, W. Zuo, Y. Chen, D. Meng, and L. Zhang, "Beyond a gaussian denoiser: Residual learning of deep cnn for image denoising," *IEEE transactions on image* processing, vol. 26, no. 7, pp. 3142–3155, 2017.
- [87] K. Zhang, W. Zuo, S. Gu, and L. Zhang, "Learning deep cnn denoiser prior for image restoration," in *Proceedings* of the IEEE conference on computer vision and pattern recognition, 2017, pp. 3929–3938.
- [88] Y. Rong, W. Huang, T. Xu, and J. Huang, "Dropedge: Towards deep graph convolutional networks on node classification," in *International Conference on Learning Representations*, 2020.
- [89] K. Oono and T. Suzuki, "Graph neural networks exponentially lose expressive power for node classification," in *International Conference on Learning Representations*, 2020.
- [90] A. Hasanzadeh, E. Hajiramezanali, S. Boluki, M. Zhou, N. Duffield, K. Narayanan, and X. Qian, "Bayesian graph neural networks with adaptive connection sampling," in *International conference on machine learning*. PMLR, 2020, pp. 4094–4104.
- [91] S. Abu-El-Haija, B. Perozzi, A. Kapoor, N. Alipourfard, K. Lerman, H. Harutyunyan, G. Ver Steeg, and A. Galstyan, "Mixhop: Higher-order graph convolutional architectures via sparsified neighborhood mixing," in international conference on machine learning. PMLR, 2019, pp. 21–29.
- [92] S. Luan, M. Zhao, X.-W. Chang, and D. Precup, "Break the ceiling: Stronger multi-scale deep graph convolutional networks," in *Advances in Neural Information Processing Systems 32*, H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, Eds., 2019, pp. 10 943–10 953.
- [93] M. Liu, H. Gao, and S. Ji, "Towards deeper graph neural networks," in *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 2020, pp. 338–348.
- [94] H. Zeng, M. Zhang, Y. Xia, A. Srivastava, A. Malevich, R. Kannan, V. Prasanna, L. Jin, and R. Chen, "Deep

graph neural networks with shallow subgraph samplers," arXiv preprint arXiv:2012.01380, 2020.