

An Enhanced Harmony Search Method for Bangla Handwritten Character Recognition Using Region Sampling

Ritesh Sarkhel¹, Amit K Saha¹, Nibaran Das¹

¹Computer Science and Engineering Department, Jadavpur University
Jadavpur, Kolkata 700032

Email: [sarkhelrites, amitksweb, nibaran]@gmail.com

Abstract- Identification of minimum number of local regions of a handwritten character image, containing well-defined discriminating features which are sufficient for a minimal but complete description of the character is a challenging task. A new region selection technique based on the idea of an enhanced Harmony Search methodology has been proposed here. The powerful framework of Harmony Search has been utilized to search the region space and detect only the most informative regions for correctly recognizing the handwritten character. The proposed method has been tested on handwritten samples of Bangla Basic, Compound and mixed (Basic and Compound characters) characters separately with SVM based classifier using a longest run based feature-set obtained from the image sub-regions formed by a CG based quad-tree partitioning approach. Applying this methodology on the above mentioned three types of datasets, respectively 43.75%, 12.5% and 37.5% gains have been achieved in terms of region reduction and 2.3%, 0.6% and 1.2% gains have been achieved in terms of recognition accuracy. The results show a sizeable reduction in the minimal number of descriptive regions as well a significant increase in recognition accuracy for all the datasets using the proposed technique. Thus the time and cost related to feature extraction is decreased without dampening the corresponding recognition accuracy.

Keywords: Feature selection; Region space; Region Sampling; Handwritten character recognition; Harmony Search Algorithm

I. INTRODUCTION

Optical Character Recognition (OCR) for handwritten characters is an active area of research for researchers all around the globe [1]. Motivation behind this is its large scope of applications; but the success of commercially available OCR could not be extended to handwritten characters as various writing styles make it quite difficult to identify the discriminating features of the characters itself. In spite of the huge popularity[2] of Bangla script, OCR of complete Bangla alphabet of handwritten characters has not received much attention from researchers until very recently. Due to numerous writing styles, huge and complex alphabet and presence of abundant Compound characters, Bangla script poses a challenge to the researchers.

One of the most common approaches of feature extraction in handwritten character recognition is to segment the sample image into several regions, extract the local features after pinpointing the minimum number of regions which are most informative in discriminating the character from others[3]. To obtain the local feature-set, different techniques are present in the literature [4][5], but none of them ensures optimal success rate [5]. Heuristics methods are applied to search the optimal, most informative regions out of all possible local regions. Several nature inspired meta-heuristics algorithms such as Genetic Algorithm[5], Artificial Bee Colony [6], Bacterial Foraging[7] etc. are used very recently. From this perspective, a new region sampling method has been introduced here for recognition of handwritten Bangla characters. The proposed methodology has been tested on the databases of Bangla Basic, Compound and a mixed dataset of both Basic and Compound characters.

Sample Character Image				
Character class	আ	এ	হ	ফ

Fig 1: Sample of Bangla Basic characters

There are several works mentioned in the literature to segment the image into several fixed sized windows or sub-regions and generates the local feature-set[3]. In [5] Das et al. used region sampling effectively and provided a comparative analysis between three meta-heuristics algorithm GA(genetic Algorithm), SA(Simulated Annealing) and HC(Hill Climbing) to search the region space for optimal number of most informative regions. Roy et al.[6] used Artificial Bee Colony Optimization method for sampling local regions. In the present work, an enhanced Harmony Search is used to sample local regions where shapes of the characters differ most.

II. OVERVIEW OF BASIC HARMONY SEARCH ALGORITHM

Harmony Search algorithm (HS) is one of the most popular nature inspired, derivation free meta-heuristics algorithm. Proposed by Geem et al. [8]. It imitates a musician's journey towards finding a better state of harmony (as shown in Fig 2). HS has gained a lot of its popularity during recent years as it has been successfully used to solve many real life optimization problems such as Water network design[9], vehicle routing[10], pipe network design[11] etc. A brief overview of basic HS algorithm is presented in Fig. 3.

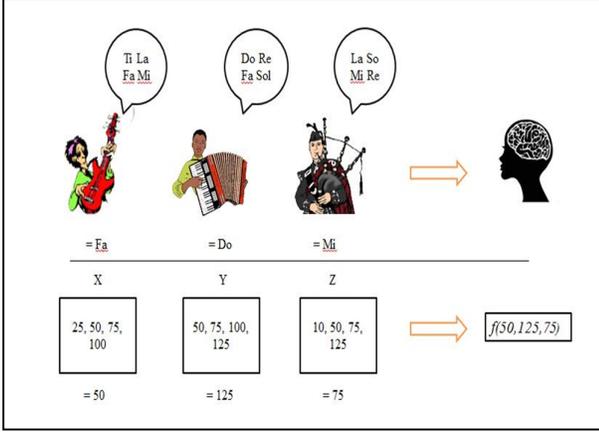


Fig 2: Analogy of musical improvisation and functional optimization in Harmony Search

III. THE PRESENT WORK

The objectives of the present work are three-fold: (a) designing a region sampling strategy to select the regions of the image containing the most discriminating features describing the character, (b) evaluating the performance of the proposed method on a dataset containing Bangla Basic characters, Bangla Compound characters and a randomly mixed dataset containing both Bangla Basic and Compound characters, (c) performing a comparative analysis of the proposed method with the Basic HS algorithm for all the datasets. Fig. 4 and Fig. 5 show the block diagram of the region selection strategy of the proposed method.

A. Definitions and notations

Let $I_{H,W}$ denotes a 2D array representing a digital image M of dimension $H \times W$ such that $I_{H,W} = \{f(i,j) | 0 \leq i \leq H-1 \text{ and } 0 \leq j \leq W-1\}$. $f(i,j)$ denotes the intensity of the pixel at (i,j) . Clearly, for a binary image $f(i,j) \in \{0,1\}$. A region R_k is defined as a bounding rectangle $R_k(i_k^{TL}, i_k^{BR}, j_k^{TL}, j_k^{BR})$, such that (i_k^{TL}, j_k^{TL}) denotes the pixel at the top left corner and (i_k^{BR}, j_k^{BR}) denotes the pixel at the bottom right corner, where $0 \leq i_k^{TL}, i_k^{BR} \leq H-1$ and $0 \leq j_k^{TL}, j_k^{BR} \leq W-1$ for all $R_k \subseteq I_{H,W}$. A 2D digital image can be defined a set of its constituent regions, say S such that $S = \{R_1, R_2, \dots, R_n\}$. The objective is to find a subset S_i of S i.e. $S_i \subseteq S$ where $|S_i|$ is minimum among all such subsets of

S which maximally increases the recognition accuracy of the image.

1. Initialize the algorithm parameters: Harmony Memory Size (HMS), Harmony Memory Consideration Rate (HMCR), Pitch Adjustment Rate (PAR) and maximum number of iterations (NI).
2. Initialize the initial population of harmony memory (HM) with random harmonies, say h_i such that $h_i \in [lb_i, ub_i]$.
3. If $r_1 \leq HMCR$; where $r_1 = rand()$ s.t. $r_1 \in U(0, 1)$
 - 3.1 Select a harmony randomly from HM, say H .
 - 3.2 If $r_2 \leq PAR$; where $r_2 = rand()$ s.t. $r_2 \in U(0, 1)$
 - 3.2.1 $H_{new} = H \pm r * BW$; where $r = rand()$ s.t. $r \in (0, 1)$
4. Compare H_{new} and the worst harmony of HM, say H_{worst} in terms their corresponding objective function values $f(H_{new})$ and $f(H_{worst})$ respectively; where $f(\cdot)$ is the fitness function.
5. If H_{new} is fitter than H_{worst} it is replaced by H_{new} in the harmony memory.
6. Steps 3 to 5 is repeated until some pre-defined termination criterion is met or the number of iterations has reached to its maximum value NI.

Fig 3: A brief overview of basic harmony search algorithm

B. Dataset of the experiment

The proposed method has been tested on the datasets of Bangla Basic[12], Bangla Compound[13] and randomly mixed dataset of both Bangla Basic and Compound characters. It is worthy to mention here that Bangla alphabet contains 50 Basic characters; out of these 11 are vowels and 39 characters are consonants. Apart from these it is also enriched with more than 334 compound characters [5]. The datasets used in the experiment are developed at CMATER lab, Jadavpur University, Kolkata.

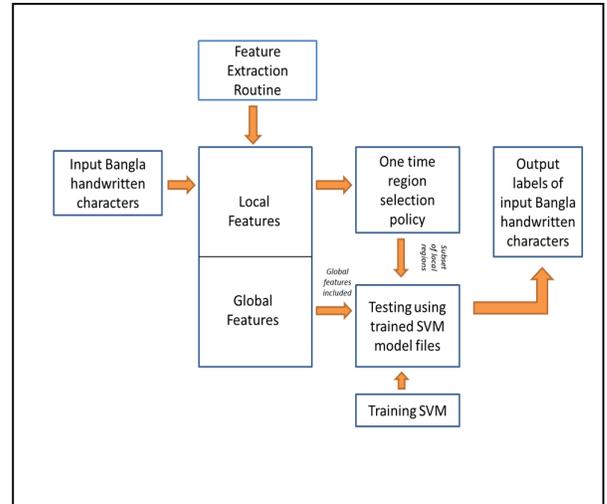


Fig 4: Block diagram of the proposed system

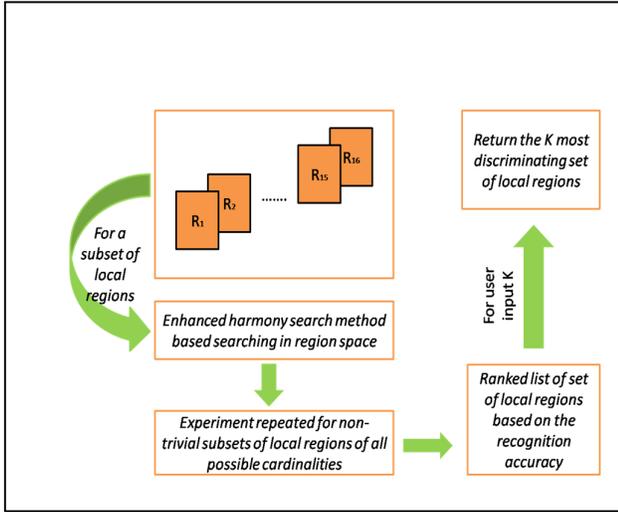


Fig 5: One time region selection policy

C. Design of the feature set

The feature set used in the experiment consists of longest run features[5] computed along 4 axes, horizontal axis, vertical axis and two major diagonal axes respectively. The features are extracted from the sub-regions, at levels 0, 1 and 2 of the quad-tree, partitioned based on CG as suggested by Basu et al [14][18]. Hence total number of features in the feature set is $(1 \times 4 + 4 \times 4 + 16 \times 4 = 84)$. Features extracted from levels 0 and 1 of the quad-tree comprise the global feature-set and the features extracted from level 2 comprise the local feature-set of the experiment. Fig. 6 provides a brief overview of the feature extraction methods that generate the initial feature-set for this experimental setup.

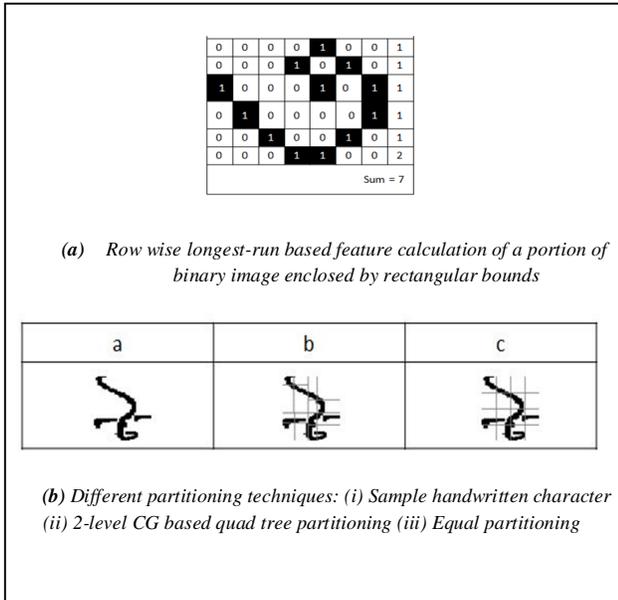


Fig 6: Feature extraction technique used in the present work

D. Region sampling methodology

Let i denotes the quad-tree based image partition levels. As described earlier $i \in \{0, 1, 2\}$. S_i denotes the set of regions extracted from i^{th} level, $S_i = \{R_{ij} | j \in \{0, 1, \dots, 4^i - 1\}\}$. V_{ij} denotes the set of feature values extracted from region R_{ij} . $M = \cup_j R_{ij}$ denotes the sample image. Longest run based features are extracted from M , for each sub-region generated by the partition. Hence $V_{ij} = \{F^R_{ij}, F^C_{ij}, F^{D1}_{ij}, F^{D2}_{ij}\}$. Fitness value for the set of regions $C \subseteq M$ is the recognition accuracy of corresponding Bangla handwritten character by SVM classifier, using only the features extracted from the set of regions C_G , where $C_G = C \cup G$; G is the set of global regions. Therefore if $f(\cdot)$ denotes the fitness function, fitness value corresponding to the set of regions C will be $f(C_G)$.

(a) Initialization:

The algorithm is initialized with an empty set of regions \mathbf{B} , i.e. $\mathbf{B} = \Phi$. Upon termination, \mathbf{B} contains the best set of regions returned by the algorithm. The parameters of the algorithm *Harmony Memory Consideration Rate* (HMCR), *Pitch Adjustment Rate* (PAR) and *Bandwidth* (BW) are set as advised by Geem et al. for best performance in [15]. *Harmony Memory Size* (HMS) is total number of local regions of the image. Only local regions are sampled for further optimization, hence the initial harmony memory (HM) is comprised of only the set of regions extracted from the 2nd level of quad-tree partitioning. A roulette wheel is created such that each sector corresponds to a candidate region of harmony memory and is equivalent to its fitness value.

(b) Selection of most informative set of regions

One of the objectives of the present work is to identify the minimal set of most discriminating regions by heuristically searching the region space.

(c) Termination Criterion

The algorithm is terminated when the experiment has successfully produced 25 generations for each possible size of non-trivial local region subset. Hence maximum number of iterations (NI) of the algorithm is 25.

The methodology of selecting minimum number of most informative set of regions that is used in the present work is described as follows.

Algorithm 1: An enhanced harmony search based region sampling methodology

Input: Initial feature-set extracted from the sample Bangla handwritten character

identifying the character. From the data collected, it can be observed that the proposed method achieves a significant 2.3% increment in recognition accuracy with 43.75% less number of discriminating regions for Bangla Basic characters, 0.6% increment in accuracy with 12.5% less number of discriminating regions for Bangla Compound characters and finally 1.2% increment in recognition accuracy with 37.5% decrease in number of discriminating regions is observed for dataset of mixed Bangla Basic and Compound characters.

TABLE 1: COMPARISON OF RECOGNITION ACCURACY ON TEST DATASETS

Dataset	Present Work	Basic Harmony Search based region-sampling	Without region-sampling
Bangla Basic character-set	86.5330%	84.7212%	84.5750%
Bangla Compound character-set	78.3803%	77.9108%	77.8991%
Mixed character-set	72.8753%	72.0130%	72.0093%

TABLE 2: COMPARISON OF AVERAGE TIME TAKEN FOR EACH CHARACTER CLASSIFICATION OF TEST SET

Dataset	Present Work	Basic Harmony Search based region-sampling	Without region-sampling
Bangla Basic character-set	0.002341	0.002727	0.003008
Bangla Compound character-set	0.013203	0.013203	0.013734
Mixed character-set	0.019562	0.019708	0.021095

The reason behind this may be due to large number of classes and training samples used, uniquely different character shapes, resulting in different treatment to creation of the dataset. On other hand, relative decrease in number of informative regions is least for Bangla Compound

characters. This might be due to the fact that shapes of Bangla Compound characters are very intricate and complex; sometimes the only thing to distinguish between two different Compound characters is a period or a small line, as discussed by Das et al.[18]. So it has the least number of region rejections and least increment in recognition accuracy.

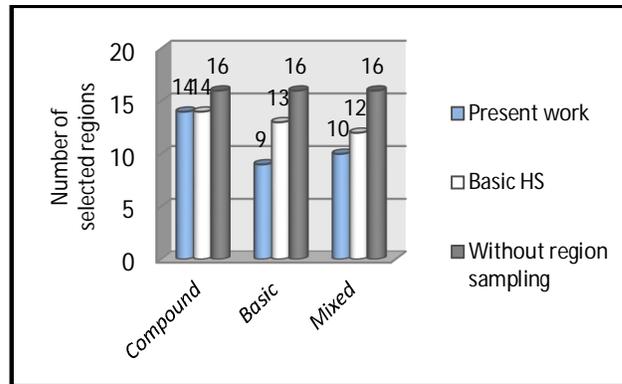


Fig 7.a: Comparison of selected regions


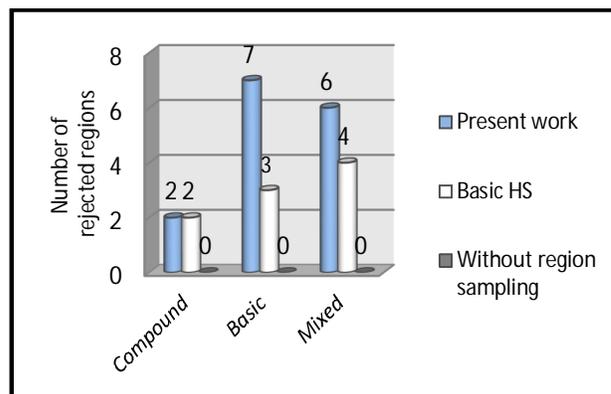


Fig 7.b: Comparison of rejected regions

Table 2 shows the comparison of average time (in seconds) needed to predict a test sample by SVM classifier. The tests have been performed on an Intel^R CoreTM i3-3110M processor, with clock frequency of 2.4 GHz and 2.00 GB RAM. From the results in Table 2 it is clear that the proposed method performs faster classification of test samples than its contemporaries. This may be attributed to better representation of a character by using lesser number of regions and using only the most informative regions. Fig. 8 shows some of the correctly classified and misclassified characters by the proposed system.

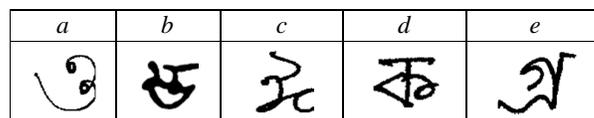

(a) Samples of correctly classified Bangla handwritten characters

Label	a	b	c	d
Misclassified character				
Misclassified character class				

(b) Samples of misclassified Bangla handwritten characters with respective correct character class

Figure 8: Samples of correctly classified and misclassified characters by the proposed method

V. CONCLUSION

An efficient system is proposed here for recognizing handwritten characters by identifying the regions of the character image which contain most of its discriminating features. An enhanced harmony search is used here for identifying the most informative regions. The proposed method is evaluated for three datasets. Evaluation is based on two factors, recognition accuracy and minimum number of local regions sufficient to identify the character correctly. From results of the experiments, the present work showed noticeable reduction in the number of most discriminating regions as well as significant increment of the recognition accuracy. To the best of our knowledge, this is the first work that uses the power of harmony search for sampling local regions to recognize handwritten characters. The results have shown great promise in this approach. Therefore it opens up a new frontier for more successful handwritten character recognition systems. Also it presents with future scope for researchers to improve its performance by using different feature-set or employing a more powerful variant of harmony search method present in the literature.

ACKNOWLEDGEMENTS

Authors are thankful to “Centre for Microprocessor Application for Training Education and Research” and Department of Computer Science & Engineering, Jadavpur University, Kolkata for kindly providing infrastructural facilities that helped to complete this work.

REFERENCES

[1] H. Fujisawa, “Forty years of research in character and document recognition—an industrial perspective,” *Pattern Recognit.*, vol. 41, no. 8, pp. 2435–2446, Aug. 2008.

[2] U. Pal and B. B. Chaudhuri, “Indian script character recognition: a survey,” *Pattern Recognit.*, vol. 37, no. 9, pp. 1887–1899, Sep. 2004.

[3] D. Impedovo and G. Pirlo, “Zoning methods for handwritten character recognition: A survey,” *Pattern Recognit.*, vol. 47, no. 3, pp. 969–981, 2014.

[4] N. Das, S. Basu, R. Sarkar, M. Kundu, M. Nasipuri, and D. kumar Basu, “An Improved Feature Descriptor for Recognition of Handwritten Bangla Alphabet,” Jan. 2015.

[5] N. Das, R. Sarkar, S. Basu, M. Kundu, M. Nasipuri, and D. K. Basu, “A genetic algorithm based region sampling for selection of local features in handwritten digit recognition application,” *Appl. Soft Comput.*, vol. 12, no. 5, pp. 1592–1606, May 2012.

[6] A. Roy, N. Das, R. Sarkar, S. Basu, M. Kundu, and M. Nasipuri, “Region Selection in Handwritten Character Recognition using Artificial Bee Colony Optimization,” pp. 183–186, 2012.

[7] M. Hanmandlu, A. V. Nath, A. C. Mishra, and V. K. Madasu, “Fuzzy Model Based Recognition of Handwritten Hindi Numerals using Bacterial Foraging,” in *6th IEEE/ACIS International Conference on Computer and Information Science (ICIS 2007)*, 2007, pp. 309–314.

[8] G. V. Loganathan, “A New Heuristic Optimization Algorithm: Harmony Search,” *Simulation*, vol. 76, no. 2, pp. 60–68, Feb. 2001.

[9] Z. W. Geem, “Particle-swarm harmony search for water network design,” *Eng. Optim.*, vol. 41, no. 4, pp. 297–311, Apr. 2009.

[10] Z. W. Geem, K. S. Lee, and Y. Park, “Application of Harmony Search to Vehicle Routing,” *Am. J. Appl. Sci.*, vol. 2, no. 12, pp. 1552–1557, Dec. 2005.

[11] Z. W. Geem, J. H. Kim, and G. V Loganathan, “Harmony search optimization: application to pipe network design,” Jan. 2002.

[12] R. Sarkar, N. Das, S. Basu, M. Kundu, M. Nasipuri, and D. K. Basu, “CMATERdb1: a database of unconstrained handwritten Bangla and Bangla–English mixed script document image,” *Int. J. Doc. Anal. Recognit.*, vol. 15, no. 1, pp. 71–83, Feb. 2011.

[13] “CMATERdb3.1.3.3 - cmaterdb - Handwritten Bangla Compound character image database - CMATERdb: The pattern recognition database repository - Google Project Hosting.” [Online]. Available: <https://code.google.com/p/cmaterdb/downloads/detail?name=CMATERdb3.1.3.3.7z&can=2&q=>. [Accessed: 31-Jan-2015].

[14] S. Basu, N. Das, R. Sarkar, M. Kundu, M. Nasipuri, and D. K. Basu, “Recognition of numeric postal codes from multi-script postal address blocks,” in *Pattern Recognition and Machine Intelligence*, Springer, 2009, pp. 381–386.

[15] K. S. Lee and Z. W. Geem, “A new meta-heuristic algorithm for continuous engineering optimization: harmony search theory and practice,” *Comput. Methods Appl. Mech. Eng.*, vol. 194, no. 36–38, pp. 3902–3933, Sep. 2005.

[16] V. N. Vapnik, “An overview of statistical learning theory,” *IEEE Trans. Neural Netw.*, vol. 10, no. 5, pp. 988–999, Jan. 1999.

[17] C. Chang and C. Lin, “LIBSVM: A Library for Support Vector Machines,” vol. 2, no. 3, 2011.

[18] N. Das, B. Das, R. Sarkar, S. Basu, and M. Kundu, “Handwritten Bangla Basic and Compound character recognition using MLP and SVM classifier,” vol. 2, no. 2, pp. 109–115, 2010.