Dense Relational Image Captioning via Multi-task Triple-Stream Networks

Dong-Jin Kim, Tae-Hyun Oh, Jinsoo Choi, and In So Kweon, Members, IEEE,

Abstract—We introduce *dense relational captioning*, a novel image captioning task which aims to generate multiple captions with respect to relational information between objects in a visual scene. Relational captioning provides explicit descriptions for each relationship between object combinations. This framework is advantageous in both diversity and amount of information, leading to a comprehensive image understanding based on relationships, *e.g., relational proposal generation*. For relational understanding between objects, the part-of-speech (POS; *i.e.*, subject-object-predicate categories) can be a valuable prior information to guide the causal sequence of words in a caption. We enforce our framework to learn not only to generate captions but also to understand the POS of each word. To this end, we propose the multi-task triple-stream network (MTTSNet) which consists of three recurrent units responsible for each POS which is trained by jointly predicting the correct captions and POS for each word. In addition, we found that the performance of MTTSNet can be improved by modulating the object embeddings with an explicit relational module. We demonstrate that our proposed model can generate more diverse and richer captions, via extensive experimental analysis on large scale datasets and several metrics. Then, we present applications of our framework to holistic image captioning, scene graph generation, and retrieval tasks.

Index Terms—Dense captioning, image captioning, visual relationship, relational analysis, scene graph.

1 INTRODUCTION

The human visual system has the capability to effectively and instantly collect the holistic understanding of contextual associations among objects in a scene [36], [49] by densely and adaptively skimming the visual scene through the eyes, *i.e.*, the saccadic eye movement. Such rich information instantly extracted from the scene allows humans to understand even subtle relationships among objects. Motivated by such human ability, in this work, we present a new concept of scene understanding, called *dense relational captioning* that provides dense and relational captions.

Rich representation of an image often leads to performance improvements of computer vision algorithms; *e.g.*, contexts surrounding objects of a scene [47], [49]. To achieve richer objectcentric understanding, Johnson *et al.* [25] proposed the DenseCap framework that generates captions for each of densely sampled local image regions. These regional descriptions facilitate both rich and dense semantic understanding of a scene in the form of interpretable language. In contrast, the information that we want to acquire includes not only that of the objects itself but also the *interaction* among other surrounding objects or the environment.

As an alternative way of representing an image, we focus on dense *relationships* between objects. In the context of human cognition, there has been a general consensus that objects and particular environments near the target object affect search and recognition efficiency. Understanding the relationships between objects clearly reveal object interactions and object-attribute combinations [24], [29], [45].

- D. Kim, J. Choi, and I. S. Kweon are with the School of Electrical Engineering, KAIST, Daejeon, Republic of Korea. E-mail: {djnjusa,jinsc37,iskweon77}@kaist.ac.kr
- T.-H. Oh is with the Dept. of Electrical Engineering and Graduate School of AI (GSAI), POSTECH, Pohang, Republic of Korea. E-mail: taehyun@postech.ac.kr
- T.-H. Oh and I. S. Kweon are the co-corresponding authors of this work.

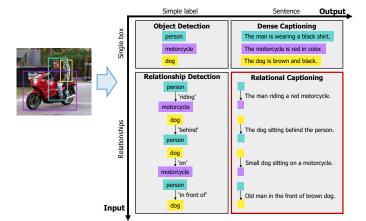


Fig. 1. Difference of our proposed relational captioning from existing image understanding frameworks. Compared to traditional frameworks, our work is advantageous in both interaction understanding and high-level expressive interpretation.

In another view, interestingly, we observe that the human annotations on various computer vision datasets predominantly have relational forms. In the Visual Genome [35] and MS COCO [42] caption datasets, most of the labels take the format of subjectpredicate-object more so than subject-predicate. Moreover, the UCF101 [60] action recognition dataset contains 85 actions out of 101 (84.2%) that are described in terms of human interactions with other objects or surroundings. These aspects tell us that understanding interaction and relationships between objects facilitate a major component in object-centric visual event understanding.

In this regard, we introduce a novel captioning framework *relational captioning* that can provide diverse and dense representations from a visual scene. In this task, we first exploit the relational context between two objects as a representation unit. This allows generating a combinatorial number of localized regional information. Secondly, we make use of captioning and its

ability to express significantly richer concepts *beyond the limited label space* of object classes used in object detection tasks. Due to these aspects, our relational captioning expands the regime further along the label space both in terms of density and complexity, and provides richer representation for an image.

Our main contributions are summarized as follows. (1) We introduce *relational captioning*, a new captioning task that generates captions with respect to relational information between objects in an image. (2) In order to efficiently train the relational caption information, we propose the *multi-task triple-stream network* (MTTSNet) that consists of three recurrent units trained via multitask learning with the part-of-speech prediction. (3) We show that our proposed method is able to generate denser and more diverse captions by evaluating on our relational captioning dataset augmented from the Visual Genome (VG) [35] dataset as well as other relevant tasks and datasets. (4) We demonstrate several use cases of our framework, including "caption graphs" which contain richer information than conventional scene graphs.

This work is the extension of our previous conference version [27]. We extend it in several aspects: We extend our architecture by adding a relational embedding module (REM) motivated by the non-local networks [68] to explicitly augment semantic meanings of surrounding objects. Also, we show that the REM further enhances MTTSNet in all the application scenarios we demonstrate. In addition, we expand our experimental results and analyses to show multiple aspects of our proposed method's algorithmic behavior.

2 RELATED WORK

Our work mainly relates to two topics: image captioning and relationship detection. In this section, we review related work on these categorized topics.

Image captioning. By virtue of deep learning and the use of recurrent neural network (e.g., LSTM [19]) based decoders, image captioning [50] techniques have been extensively explored [1], [12], [23], [26], [46], [55], [65], [71], [76], [78]. One of the research issues in captioning is the generation of diverse and informative captions. Thus, learning to generate diverse captions has been extensively studied recently [5], [8], [9], [28], [34], [58], [64], [66]. As one of the solutions, the dense captioning (DenseCap) task [25] was proposed which uses diverse region proposals to generate localized descriptions, extending the conventional holistic image captioning to diverse captioning that can describe local contexts. Since DenseCap generates each caption per bounding box by only relying on an internal region of the bounding box, Yang et al. [73] improves the DenseCap model by incorporating a global image feature as a context cue as well as a region feature of the desired objects with late fusion. Motivated by this, in order to learn dependencies of subject, object and union representations, we incorporate a triple-stream LSTM for our captioning module and further enhance the relational embedding by a non-local layer [68]. Our triple-stream LSTM has analogies with the neural module networks which have been used in various language-related tasks such as visual question answering [2], [21], [22], visual dialog [33], visual grounding [43], captioning [62], [63], [75], and symbolic reasoning [17]. Our triple-stream LSTM can be seen as a simplified version of a neural module network with subject, predicate, and object modules specifically designed for our relational captioning task. Moreover, our relational captioning is able to generate even more diverse caption proposals than dense captioning by considering *relations* between objects.

Visual relationship detection and scene graph generation. Understanding visual relationships between objects have been an important concept in various tasks. Conventional visual relationship detection (VRD) typically deals with predicting the subjectpredicate-object (in short, subj-pred-obj). A pioneering work by Lu et al. [45] formalized the VRD task and provides a dataset, while addressing the subject (or object) and predicate classification models separately. Their VRD dataset has also led to extensive studies on visual relationship understanding [10], [37], [52], [74], [77], [79], [81], [83], [84]. On the other hand, similar to the VRD task, scene graph generation has started to be explored [16], [38], [39], [53], [67], [69], [70], [72], [80], where the task is to generate a structured graph that expresses the context relationships of a scene and provides a compact and interpretable representation of scenes. Moreover, human-object interaction detection task has also started to be explored recently [4], [13], [15], [30], [31], [40].

Although the VRD dataset is larger (100 object classes and 70 predicates) than Visual Phrases [57] dataset, it is still inadequate to handle real world scale. The Visual Genome (VG) dataset [35] for relationship detection consists of 31,000 predicate types and 64,000 object types, which provides the combinatorial relationship triplets that are too diverse for the VRD models to comply with. This is because, in the VRD task, each object label should be assigned to each of the various adjective and noun combinations, *e.g.*, respective different labels for "little boy" and "small boy." As a result, only the simplified version of VG relationship dataset has been studied [10], [37]. In contrast, our method is able to represent extensive natural language of relations by tokenizing the whole relational expressions into words and learning from them directly.

While the recent state-of-the-art VRD [37], [45], [52], [77], [79] or scene graph generation [16], [39], [69], [70], [80] methods attempted to use language priors to detect relationships, we directly learn the relationship in a descriptive language form. In addition, the expressions of the scene graph generation or the VRD tasks are restricted to subj-pred-obj triplets, whereas our proposed relational captioning task can provide additional information such as attributes or noun modifiers by adopting free-form natural language expressions. Thereby, we present an extended scene graph representation, called *caption graph*.

In summary, dense captioning facilitates a natural language interpretation of regions in an image, while VRD can predict relational information between objects within a restricted set. Our work combines both axes, resulting in much denser and more diverse captions than DenseCap. That is, given B number of region proposals in an image, we can obtain B(B-1) number of relational captions, whereas DenseCap returns only B number of captions. This property can be favorable for subsequent algorithms in other downstream tasks.

3 MULTI-TASK TRIPLE-STREAM NETWORKS

Our relational captioning generates captions as follows. Given an input image, a bounding box detector generates various object proposals, followed by a captioning module that predicts combinatorial captions describing each pair of objects along with POS labels. This pipeline is illustrated in Fig. 2, which is composed of a localization module based on the region proposal network (RPN) [54], and a triple-stream RNN (LSTM [19]) module for captioning. In addition, we introduce the relational embeddding module (REM) as an extension, to encourage explicit encoding of

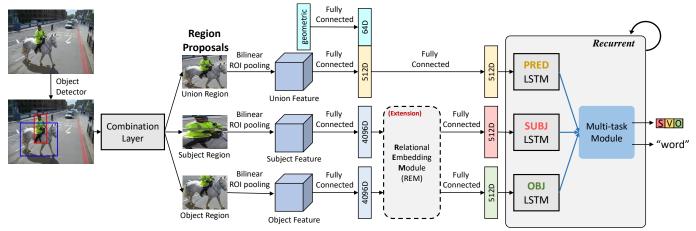


Fig. 2. Overall architecture of the proposed multi-task triple-stream networks (MTTSNet). Three region features (Union, Subject, Object) come from the same shared branch (Region Proposal Network), and for *subject* and *object* features, the first intermediate FC layer share the weights. Relational Embedding Module (REM) is introduced as an extension, which takes into account early dependency between *subject* and *object*.

relational information. Our network supports end-to-end training within a single optimization step that allows joint localization, combination, and description with natural language.

Specifically, given an image, the RPN generates object proposals. Then, the combination layer takes a pair of proposals and assigns them to the *subject* and *object* regions at a time. Also, to take the surrounding context information into account, we utilize the *union* region of the *subject* and *object* regions as side information. These triplet features from the *subject*, *object*, and *union* regions are fed to the triple-stream LSTMs, where each stream takes its own purpose, *i.e.*, *subject*, *object*, and *union*. Given these triplet features, the triple-stream LSTMs collaboratively generate a caption and POS classes of each word. We describe details of these processes in the following sub-sections.

3.1 Region Proposal Networks

Our network uses fully convolutional layers of VGG-16 [59]¹ up to the final pooling layer (*i.e.* pool5) for extracting the spatial features via the bilinear region-of-interest (ROI) pooling [25]. The object proposals are generated by RPN [54]. It takes the feature tensor from the pool5 layer, and proposes *B* number of regions of interest after non-maximum suppression (NMS). Each proposed region comes with its confidence score, region feature of shape $512 \times 7 \times 7$, and coordinates b=(x, y, w, h) of the bounding box with center (x, y), width *w* and height *h*.

Relational proposals are generated by building pairwise combinations of B number of region proposals, where in turn we get B(B-1) possible region pair combinations. We call this layer as *combination layer*. A distinctive point of our model with the previous dense captioning methods [25], [73] is that, while the methods regard each region proposal as an independent target to describe and produce B number of captions, we consider their pairwise B(B-1) number of combinations, which are much denser and explicitly expressible in terms of relationships. Also, we can asymmetrically use each entry of a pair by assigning the roles of the regions, *i.e.*, (*subject*, *object*) or *vice versa*.

We vectorize the region features, and then apply two fullyconnected (FC) layers to map them into *D*-dimensional features, where the intermediate dimensions are $D_u=512$ for the union region and D_o =4096 for *subject* and *object* regions. Only the first intermediate FC layer for *subject* and *object* features shares their weights. We use the rectified linear (ReLU) units [48] and Dropout [61] for the FC layers. The *subject* and *object* region features are optionally fed to the Relational Embedding Module (REM) which outputs refined features with the same size D=512. The details of the REM is described in Sec. 3.2. In short, the aforementioned process encodes region features into *D*-dimensional features, which is called *region codes*.

Furthermore, we leverage an additional region, the *union* region b_u of (*subject*, *object*) motivated by Yang *et al.* [73]. Yang *et al.* (emonstrate that the global context of an image as a sideinformation can improve the captioning performance. Compared to the global context of Yang *et al.*, our union region has more localized information incorporating both subject and object. In addition, to provide relative spatial information, we append geometric features for the *subject* and *object* box pair, *i.e.*, (b_s, b_o) , to the *union* feature. Given two bounding boxes $b_s = (x_s, y_s, w_s, h_s)$ and $b_o = (x_o, y_o, w_o, h_o)$, we use the following geometric feature **r** similar to that of Peyre et al. [51] as

$$\mathbf{r} = \begin{bmatrix} \frac{x_o - x_s}{\sqrt{w_s h_s}}, \frac{y_o - y_s}{\sqrt{w_s h_s}}, \sqrt{\frac{w_o h_o}{w_s h_s}}, \frac{w_s}{h_s}, \frac{w_o}{h_o}, \frac{b_s \bigcap b_o}{b_s \bigcup b_o} \end{bmatrix} \in \mathbb{R}^6, \quad (1)$$

where $b_s \cap b_o$ and $b_s \bigcup b_o$ denotes the intersection and union areas of the two boxes respectively. The geometric feature **r** is encoded into a 64-dimensional geometric vector by passing through an additional FC layer. By concatenating the 64-dimensional geometric vector with the *union* feature, the shape of this feature is D + 64. Then, the dimension of the *union* region code is reduced by the following FC layer. This stream of the aforementioned operations is illustrated in Fig. 2. The three features extracted from the *subject*, *object*, and *union* regions are fed to each LSTM described in the following sections.

3.2 Relational Captioning Networks

Our network consists of multiple LSTM modules to generate captions that describe relational information. To this end, we design a new network that explicitly exploits relational cues.

In the proposed relational region proposal, a distinctive facet is its capability to provide a triplet of region codes corresponding to the *subject*, *object*, and *union* regions, which can be also viewed as the POS of a sentence (subj-pred-obj). The existence of these correspondences between each region in a triplet and POS

^{1.} One can improve the performance of our relational method by replacing the backbone network with a deeper one, e.g., ResNet [18], which we show later in the experiment section.

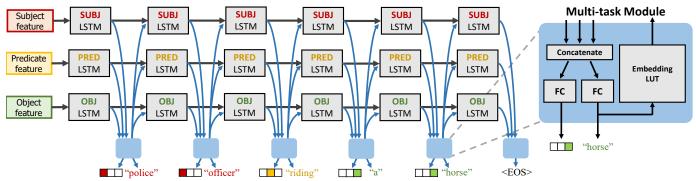


Fig. 3. An illustration of the unrolled triple-stream LSTM. Our model consists of two major parts: triple-stream LSTM and a multi-task module. The multi-task module jointly predicts a caption word and its POS class (subj-pred-obj, illustrated as three cells colored according to the POS class), as well as the input vector for the next time step.

information can lead to the following advantages: 1) input region codes can be adaptively merged depending on their POS roles and be fed to the final word prediction module, and 2) when predicting a word, the POS prior can effectively affect the quality of caption generation by reducing potentially spurious words. To leverage these benefits, we propose the *multi-task triple-stream network* (MTTSNet). For the first advantage, to derive the POS aware inference, we propose the *triple-stream network* which consists of three separate LSTMs respectively corresponding to subj-predobj. The outputs of the LSTMs are combined via concatenation. For the second advantage, during word prediction, we jointly infer POS classes of each word. This POS prediction task allows the network to learn the POS prior knowledge for the word prediction.

Triple-Stream LSTMs. Intuitively, the region codes of the *subject* and *object* would be closely related to the respective subject and object related words in a caption, while the *union* and geometric features may contribute to the predicate. In our relational captioning framework, the LSTM modules need to adaptively take into account input features to generate a caption according to the POS decoding stage.

As shown in Fig. 2, the proposed triple-stream LSTM module consists of three separate LSTMs, each of which is in charge of the subject, object and union region codes, respectively. From RPN, a triplet of region codes are fed as input to LSTMs, so that a sequence of words (caption) is generated. At each step (word), the triple-stream LSTMs generate three embeddings separately, and a single word is predicted by consolidating the three processed embeddings by the multi-task module (described in the next subsection). The embedding of the predicted word is distributed into all three LSTMs as inputs of the next step and is used to run the next step in a recursive manner. Thus in each step, each entry of the triplet input is used differently, which allows more flexibility than that of a single LSTM as used in traditional captioning models [25], [65]. In other words, the importance of the input features changes at every recursive step according to which POS the word being generated belongs to.

Multi-task with POS Classification. At each part of the triplestream LSTMs, we obtain three intermediate output features from each LSTM. To predict a word, we aggregate the features from the subject, predicate and object information, via a single FC layer. Also, we add an additional side task, POS prediction, from the same concatenated feature. We call this fusion layer as the *multitask* module as shown in the right enlarged view of Fig. 3.

The multi-task module can be viewed as a *late fusion* approach. An alternative would be *early fusion*, which consolidates

the information in an even earlier step, *i.e.*, the fusion of the three region codes (*e.g.*, concatenation of three codes) followed by a single LSTM model instead of the triple-stream LSTMs. However, we observe that this early fusion approach has lower performance than our late fusion one, which is also consistent with the observation reported by Yang *et al.* [73]. Thus, we take the late fusion approach and compare the performance in Sec. 4.

The POS classification task is leveraged to more effectively train the relational captioning. We impose the POS classification loss during training, so that the networks learn which LSTM they should emphasize more at a word prediction. Thereby, relational captioning is encouraged to generate a sequence of words in subj-pred-obj order, *i.e.*, the order of POS. The POS tag can be easily obtained by a modern natural language processing toolkit, NLTK POS tagger [44], which had been established for a long time; thus, it provides a reliable prediction. In our case, we obtain POS (pseudo) ground truth from automatic label augmentation from relationship triplet labels.

We empirically find that this multi-task learning with POS not only helps the shared representation to be richer, but also guides the word predictions; thus, it helps to improve the captioning performance overall. Since each POS class prediction relies on respective representations from each LSTM, (*e.g.*, predicate class prediction from the *pred*-LSTM), the gradients from the POS classification are mainly back-propagated through the feature elements representing a class ambiguously within the concatenated feature. Even for the same word output, the gradients from the multitask module may differ by this fact, so that representations across LSTMs can be learned to be further distinctive. Also, the POS prior may make the network suppress spurious word candidates.

Another potential way to leverage the POS priors would be to add an additional soft attention module to select among the three features instead of concatenating them. We compare this attention approach with our simple concatenation [6], where the results show that the performance of the attention approach (44.94 Recall) is lower than our concatenation (45.96 Recall) while using more number of parameters. Thus, we use the simple concatenation.

Relational Embedding Module. Since our triple-stream network only utilizes the triplet features (subject, object, and union), it alone may lack global understanding of the constituent objects in an entire image, *i.e.*, global context. In this extension, to strengthen the capability of holistic relational understanding across all the objects, we employ the non-local layer [20], [31], [68], we called the relational embedding module (REM), where we apply the nonlocal layer to each object candidate. This is different from Wang *et*

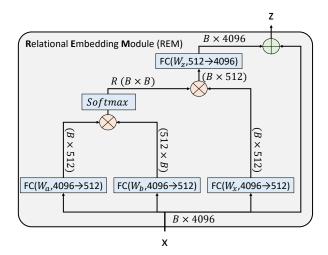


Fig. 4. Architecture of the relational embedding module (REM). \bigotimes denotes the matrix multiplication, and \bigoplus the element-wise sum. The softmax operation is applied row-wise. The blue boxes with the FC label denote FC layers.

al. [68], where they apply it to the feature map densely while we apply it to ROI pooled features. The REM enhances the relational information across all objects via the attention mechanism.

Specifically, let $X \in \mathbb{R}^{B \times D_o}$ denote a stack of *B* number of vectorized region features extracted from the first FC layer after the bilinear ROI pooling. Then, we compute the relational association matrix by:

$$R = \operatorname{softmax}(\sigma(XW_a)\sigma(XW_b)^{\top}) \in \mathbb{R}^{B \times B}, \qquad (2)$$

where $\sigma(\cdot)$ denotes ReLU and $W_a, W_b \in \mathbb{R}^{D_o \times 512}$ are learnable weights that map the region features X to each of its own role, (*e.g.*, subject and object) and the softmax operation is applied in row. Then, the relational feature matrix is computed by:

$$A = R\sigma(XW_x)W_z^\top \in \mathbb{R}^{B \times D_o},\tag{3}$$

where $W_x \in \mathbb{R}^{D_o \times 512}$ and $W_z \in \mathbb{R}^{D_o \times 512}$ are again learnable weights. The matrix A encodes aggregated features across all the objects according to the degree of relational association by R, which is similar to the message passing that exchanges the information according to relationships. This relational feature matrix is combined with the original feature X by Z = X + A, so that the holistic relational information is enhanced on top of X. This can be viewed as augmenting richer semantic meanings, e.g., a shirt (X) is augmented to a shirt that someone is in or a shirt on something depending on the surroundings. Also, it is akin to the residual connection, allowing efficient training via the residual learning mechanism [18]. Different from the non-local approaches [68], [69], we introduce non-linear activations, ReLU, in Eqs. (2) and (3), motivated by a low-rank bilinear pooling method [32]. We empirically found this modification leads to noticeable performance improvement.

Furthermore, similar to Hu *et al.* [20], we may leverage the box geometric features \mathbf{r} in the REM to re-scale the attention. However, in our empirical experiment, this does not help and even lowers the performance than our method that concatenates geometric features to the union feature. Thus, we use the final REM module illustrated in Fig. 4.

Loss functions. The proposed model is trained to minimize the following loss function:

$$\mathcal{L} = \mathcal{L}_{cap} + \alpha \mathcal{L}_{POS} + \beta \mathcal{L}_{det} + \gamma \mathcal{L}_{box}, \tag{4}$$

Model	Output of RPN	Input of LSTM	LSTM	POS prediction
Direct Union	Union region	U	Single	×
Union	Object	U	Single	×
Union+Coord.	Object	U + C	Single	×
Subj+Obj	Object	S + O	Single	×
Subj+Obj+Coord.	Object	S + O + C	Single	×
Subj+Obj+Union	Object	S + O + U	Single	×
Union (w/MTL)	Object	U	Single	0
Subj+Obj+Coord.(w/MTL)	Object	S + O + C	Single	0
Subj+Obj+Union (w/MTL)	Object	S + O + U	Single	0
Union+Union+Union (w/MTL)	Object	U + U + U	Triple	0
TSNet	Object	S O U + C	Triple	×
MTTSNet	Object	S O U + C	Triple	0
		1		

TABLE 1

Comparison of model configurations. '|' and '+' indicate separation and concatenation of input respectively.

where \mathcal{L}_{cap} , \mathcal{L}_{POS} , \mathcal{L}_{det} , and \mathcal{L}_{box} denote captioning loss, POS classification loss, detection loss, and bounding box regression loss, respectively. α , β , and γ are the balance parameters (we set them to 0.1 for all experiments). The first two terms are for captioning and the next two terms are for the region proposal. \mathcal{L}_{cap} and \mathcal{L}_{POS} are cross-entropy losses applied to each word and POS prediction at every time step, respectively. For each time step, \mathcal{L}_{POS} measures a 3-class cross entropy loss. \mathcal{L}_{det} is a binary logistic loss for foreground/background regions to distinguish positive and negative object regions [14], [25], while \mathcal{L}_{box} is a smoothed L1 loss [54].

4 EXPERIMENTS

In this section, we provide the experimental setups, competing methods and performance evaluation of relational captioning with both quantitative and qualitative results, so that we empirically show the benefit and potential of the proposed relational captioning task and the proposed method.

4.1 Experimental Setups

Implementation details. We use Torch7 [7] to implement our model. For the backbone visual feature extraction, we use VGG-16 [59] and initialize with the weights pre-trained on ImageNet [56]. We pre-train the RPN on the Visual Genome (VG) dense captioning data [35]. For sequence modeling, we set the dimension of all the LSTM hidden layers to be 512. A training batch contains an image that is resized to have a longer side of 720 pixels. We use Adam optimizer [3] for training (learning rate $lr=10^{-6}$, b1=0.9, b2=0.999). For the RPN, we use 12 anchor boxes for generating the anchor positions in each cell of the feature map, and 128 boxes are sampled in each forward pass of training. We use Titan X GPU, and it takes about four days for a model to convergence when training on our relational captioning dataset.

We use the setting for the region proposals similar to that of [25] for fairness. For training, a region is positive if it has at least 0.7 IoU ratio with a corresponding ground truth region, and a region is negative if its IoUs are less than 0.3 with all ground truth regions. For evaluation, after non-maximum suppression (NMS) based on the predicted proposal confidences, 50 confident bounding boxes are selected. We can additionally reduce box pair predictions by discarding the pairs that produce captions with low confidence scores. Caption confidence scores can be computed by sequentially multiplying all of the generated word probabilities.

Relational captioning dataset. Since there is no existing dataset for the relational captioning task, we construct a dataset by utilizing VG relationship dataset version 1.2 [35] which consists of 85,200 images with 75,456/4,871/4,873 splits for train/validation/test sets respectively. We tokenize the relational

	mAP (%)	Img-Lv. Recall	METEOR				
Direct Union	-	17.32	11.02				
Union	0.57	25.61	12.28				
Union+Coord.	0.56	27.14	13.71				
Subj+Obj	0.51	28.53	13.32				
Subj+Obj+Coord.	0.57	30.53	14.85				
Subj+Obj+Union	0.59	30.48	15.21				
TSNet (Ours)	0.61	32.36	16.09				
Union (w/MTL)	0.61	26.97	12.75				
Subj+Obj+Coord (w/MTL)	0.63	31.15	15.31				
Subj+Obj+Union (w/MTL)	0.64	31.63	16.63				
Union+Union+Union (w/MTL)	0.58	34.11	14.69				
MTTSNet (Ours)	0.88	34.27	18.73				
MTTSNet (Ours) + REM [68]	1.12	45.96	18.44				
MTTSNet (Ours) + REM (R)	1.48	48.56	19.48				
Neural Motifs [80]	0.25	29.90	15.34				
TABLE 2							

TABLE 2

Ablation study for the relational dense captioning task on the relational captioning dataset. The second and third row sections (2-7 and 8-12th rows) show the comparison of the baselines with and without the POS classification (w/MTL). In the last row, we show the performance of the state-of-the-art scene graph generator, Neural Motifs [80].

Union+Union+Union denotes the results of using three LSTMs with only union features as LSTM inputs, (R) indicates ResNet-50 [18] as a backbone network instead of VGG-16.

expressions into word level tokens, and we assign the POS class from the triplet association for each word.

However, the VG relationship dataset has a limited diversity of the words used. Therefore, naïvely converting such VRD dataset to a captioning dataset is not desirable, in that the captions generated from a trained model on the dataset tends to be too simple (*e.g.*, "building-has-window"). This limited data restricts the expressiveness of the model. To examine the diverse expressions of our relational captioner, we construct our relational captioning dataset to have more natural sentences with richer expressions.

Through observation, we noticed that labels in the VG relationship dataset lack *attributes* describing the subject and object, which are perhaps what enriches the expressiveness of sentences the most. We enrich the dataset by leveraging the VG *attribute* dataset [35]. The specific procedure of this attribute enrichment is described in Appendix. After this enrichment, we obtain 15,595 different vocabularies for our relational captioning dataset, which was 11,447 different vocabularies before this process.

We train our model with this dataset, and report its result in this section. In the following subsections, we evaluate in multiple views including a holistic image captioning performance and various analysis such as comparison with scene graph generation.

4.2 Relational Dense Captioning: Ablation Study

Baselines. Since no direct related work for relational captioning exists, we implement several baselines by modifying the most relevant methods, which facilitate our ablation study. All the configurations are summarized in Table 1 and described as follows.

- Direct Union has the same architecture with DenseCap [25], but of which RPN is trained to directly predict union regions. A union region is converted to a 512-dimensional region code, followed by a single LSTM to generate a relational caption.
- Union also resembles DenseCap [25] and Direct union, but its RPN predicts individual object regions. The object regions are paired as (subject, object), and then only a union

	Recall	METEOR	#Caption	Caption/Box
Image Cap. (Show&Tell) [65]	23.55	8.66	1	N/A
Image Cap. (Show&Tell) [65] [†]	23.81	9.46	10	N/A
Image Cap. (SCST) [55]	24.04	14.00	1	N/A
Image Cap. (SCST) [55] [†]	24.17	13.87	10	N/A
Image Cap. (RFNet) [23]	24.91	17.78	1	N/A
Image Cap. (RFNet) [23] [†]	25.26	17.83	10	N/A
Dense Cap. (DenseCap) [25]	42.63	19.57	9.16	1
Dense Cap. (TLSTM) [73]	43.15	20.48	9.24	1
Relational Cap. (Union)	38.88	18.22	85.84	9.18
Relational Cap. (MTTSNet)	46.78	21.87	89.32	9.36
Relational Cap. (MTTSNet+REM)	56.52	22.03	80.95	9.24
Relational Cap. (MTTSNet+REM (R))	59.71	23.27	85.37	9.26
Relational Cap. (Union) ^(GT)	41.64	18.90		
Relational Cap. (MTTSNet) ^(GT)	48.50	21.63	83.44	9.30
Relational Cap. $(MTTSNet+REM)^{(GT)}$	56.62	22.50		

TABLE 3

Comparisons of the holistic level image captioning. We compare the results of the relational captioners with those of three image captioners [23], [55], [65] and two dense captioners [25], [73]. To compare with stronger baselines, we modify the image captioners by deploying a stochastic sampling. We annotate the modified versions with stochastic sampling with †. We annotate (*GT*) for the methods that replace RPN with ground truth bounding boxes; thus, those represent proxy upper bounds of performance. (R) indicates ResNet-50 [18] as a backbone network instead of VGG-16.

region from each pair is fed to a single LSTM for captioning. Also, we implement two additional variants: Union (w/MTL) additionally predicts the POS classification task, and Union+Coord. appends the geometric feature to the region code of the union. Lastly, to match the number of parameters with our MTTSNet, we additionally introduce the Union+Union+Union baseline with the triple-stream architecture, which only takes the union region as input.

- Subj+Obj and Subj+Obj+Union models use the concatenated region code of (subject, object) and (subject, object, union) respectively and pass them through a single LSTM (an early fusion approach). Also, Subj+Obj+Coord. uses the geometric feature instead of the region code of the union. Moreover, we evaluate the baselines, Subj+Obj+{Union, Coord} again by adding the POS classification (*i.e.*, MTL loss).
- TSNet denotes the proposed triple-stream LSTM model without a branch for the POS classifier. Each stream takes the region codes of (subject, object, union+coord.) separately. MTTSNet (*i.e.*, TSNet+POS) denotes the multi-task triple-stream network with the POS classifier, and MTTSNet+REM denotes the model combined with the REM.

Evaluation metrics. Motivated by the evaluation metric suggested for the dense captioning task by Johnson et al. [25], we suggest a modified evaluation metric for the relational dense captioning. Firstly, to assess the caption quality, we measure the average METEOR score [11] for predicted captions (noted as METEOR). Also, we use a mean Average Precision (mAP) similar to Johnson et al. which measures both localization and language accuracy. For language accuracy, we measure METEOR score with thresholds $\{0, 0.05, 0.10.15, 0.2, 0.25\}$, and we use IOU thresholds $\{0.2, 0.3, 0.4, 0.5, 0.6\}$ for localization accuracy. The AP values, obtained by all the pairwise combinations of language and localization thresholds, are averaged to get the final mAP score. The major difference of our metric from that of Johnson et al. is that, for the localization AP, we measure for both the subject and object bounding boxes with respective ground truths. In particular, we only consider the samples with IOUs of both the

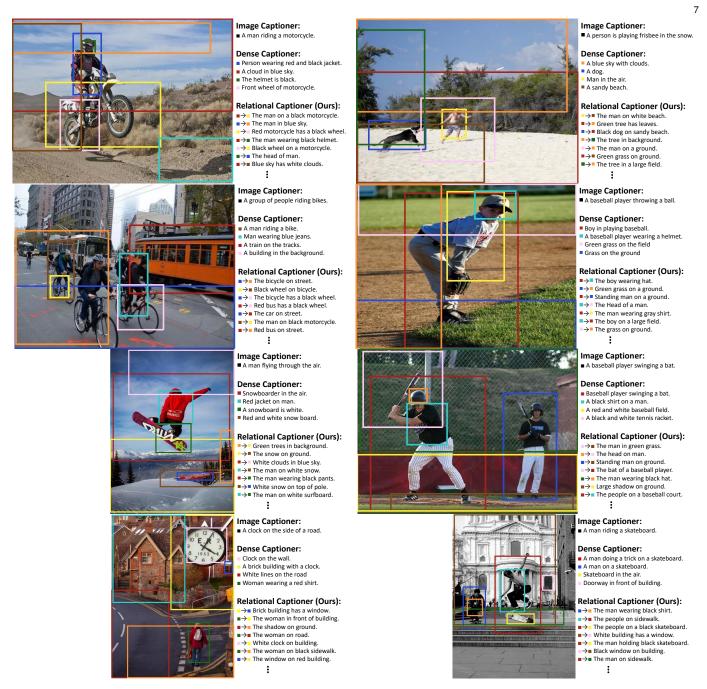


Fig. 5. Example captions and region generated by the proposed model on Visual Genome test images. The region detection and caption results are obtained by the proposed model from Visual Genome test images. We compare our result with the image captioner [65] and the dense captioner [25] in order to contrast the amount of information and diversity.

subject and object bounding boxes greater than the localization threshold, which yields a *more challenging metric*. For all cases, we use percentage as the unit of metric.

In addition, we suggest another metric, called "image-level (Img-Lv.) recall." This measures the caption quality at the holistic image level by considering the bag of all captions generated from an image as a single prediction. This metric evaluates the diversity of the produced representations by the model for a given image. Specifically, with the aforementioned language thresholds of METEOR, we measure the recall of the predicted captions over about 20 ground truth captions.

Results. Table 2 compares the performance of various methods for the relational dense captioning task on the relational captioning dataset. To compare with a different representation of relationship,

we additionally compare with the state-of-the-art scene graph generator, Neural Motifs [80]. Due to the different output structure, we compare with Neural Motifs trained with the supervision for relationship detection. Similar to the setup in [25], we fix the number of region proposals after NMS to 50 for all methods for a fair comparison.

Within the second row section (2-7th rows) of Table 2, our TSNet shows the best result suggesting that the triple-stream component alone is a sufficiently strong baseline over the others. On top of TSNet, applying the MTL loss (*i.e.*, MTTSNet) improves overall performance, and especially improves mAP, where the detection accuracy is dominantly improved compared to the other metrics. This shows that *triple-stream LSTM* is the key module that most leverages the MTL loss across other early

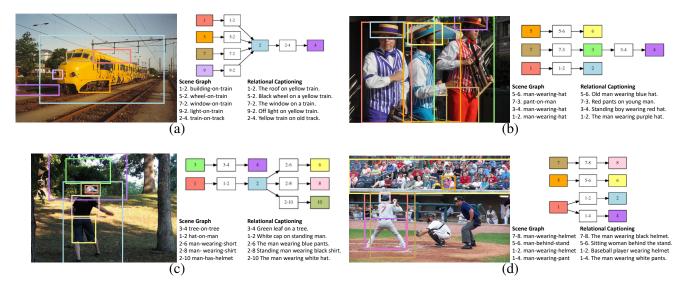


Fig. 6. Results of generating "caption graph" from our relational captioniner. In order to compare the diversity of the outputs, we also show the result of the scene graph generator, Neural Motifs [80].

fusion approaches (see the third row section of the table). Also, compared to Union+Union+Union (w/MTL), our MTTSNet shows much higher performance, which validates that the performance improvement by our method is not simply due to the increased number of the model parameters. Moreover, by adding REM to our late fusion method, MTTSNet, we have achieved further improvements in both mAP and Img-Lv. Recall scores (more strongly on Img-Lv. Recall). As another factor, we can see from Table 2 that the relative spatial information (Coord.) and union feature information (Union) improves the results. This is because the union feature itself preserves the spatial information to some extent from the 7×7 grid form of its activation. Also, the relational captioner baselines including our TSNet and MTTSNet perform favorably against Neural Motifs in all metrics. Note that handling free-form language generation which we aim to achieve is more challenging than the simple triplet prediction of scene graph generation.

4.3 Comparison with Holistic Image Captioning

We also compare our approach with other image captioning frameworks, *Image Captioner* (Show&Tell [65], SCST [55], and RFNet [23]), and *Dense Captioner* (DenseCap [25] and TLSTM [73]) in a holistic image description perspective. To measure the performance of *holistic image-level* captioning for dense captioning methods, we use Img-Lv. Recall metric defined in the previous section. We compare them with two relational dense captioning methods, Union and MTTSNet (as well as



Fig. 7. Examples of different captions predicted from relational captioning by (a) changing objects, (b) changing subjects, and (c) switching the subject and object. Our model shows different predictions from different subject and object pairs.

+REM), denoted as *Relational Captioner*. For a fair comparison, for Dense and Relational Captioner, we adjust the number of region proposals after NMS to be similar, which is different from the setting in the previous section which fixes the number of proposals before NMS. For fair comparison with the Image Captioner, in addition to the typical selection of words according to maximum probabilities in caption generation, we introduce another baselines using a stochastic sampling (probabilistically selecting a word proportional to the probabilities of words from a model) to allow diverse caption generation from the LSTM. We generate 10 captions from the stochastic variant image captioners in order to match the number of captions between Image Captioner and Dense Captioner. Finally, in order to isolate the performance of the caption generation and the box localization modules, we measure the captioning performance by setting the bounding boxes as the ground truth boxes. We annotate such variant of relational captioners with (GT).

Table 3 compares the image-level recall, METEOR, and additional quantities. *#Caption* denotes the average number of captions generated from an input image and *Caption/Box* denotes the average ratio of the number of captions generated and the number of boxes remaining after NMS. Therefore, *Caption/Box* demonstrates how many captions can be generated given the same number of boxes generated after NMS. By virtue of multiple

	R@1	R@5	R@10	Med		
Image Cap. (Full Image RNN) [26]	0.09	0.27	0.36	14		
Dense Cap. (Region RNN) [14]	0.19	0.47	0.64	6		
Dense Cap. (DenseCap) [25]	0.25	0.48	0.61	6		
Dense Cap. (TLSTM) [73]	0.27	0.52	0.67	5		
Relational Cap. (MTTSNet)	0.29	0.60	0.73	4		
Relational Cap. (MTTSNet+REM)	0.32	0.64	0.79	3		
Random chance	0.001	0.005	0.01	-		
TABLE 4						

Sentence based image retrieval performance comparison across different representations. We evaluate ranking using recall at k ($\mathbb{R}@K$, higher is better) and the median rank of the target image (Med, lower is better). The random chance performance is provided for reference. We compare with TLSTM in addition to the baselines (Full Image RNN, Region RNN, DenseCap) suggested in Johnson *et al.* [25].

Query Sentence + Reference Image

White plane has a red wing.

Retrieved Images & Region-pair

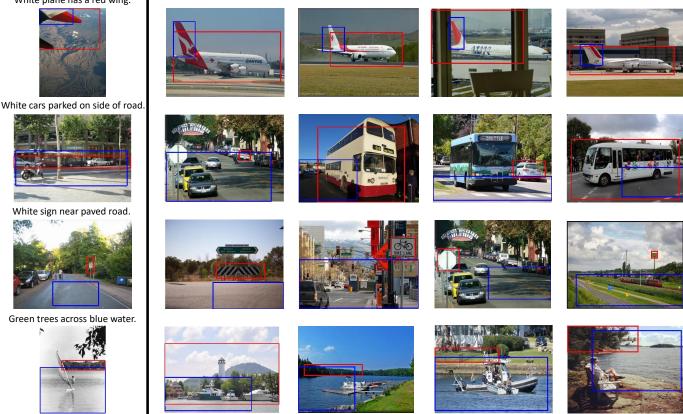


Fig. 8. Sentence based image and region-pair retrieval results on Visual Genome test images. The retrieved results are shown in the ranked order.

captions per image from multiple boxes, the Dense Captioner is able to achieve higher performance than all the Image Captioners. While the stochastic sampling methods slightly improve image captioning performance in terms of recall, the performance is still far lower than Dense Captioners or Relational Captioners by a large margin, as the diversity of an image captioner's output is still very limited by its inherent design. Compared with the Dense Captioners, MTTSNet as a Relational Captioner can generate an even larger number of captions, given the same number of boxes. Hence, as a result of learning to generate diverse captions, the MTTSNet achieves higher recall and METEOR. TLSTM [73] improves the performance of DenseCap [25] due to a better representational power, but the performance is still lower than that of MTTSNet. Comparing to Union, we can see that it is difficult to obtain better captions than Dense Captioner by only learning to use the union of subject and object boxes, despite having a larger number of captions. Adding REM to our MTTSNet, further improves the performance in both the Recall and the METEOR score. In addition, even when setting the bounding boxes as the ground truth bounding boxes, by virtue of the more powerful language module, MTTSNet (especially MTTSNet+REM) shows favorable performance compared to Union.

We show prediction examples of our relational captioning model in Fig. 5 along with the comparisons against the traditional frameworks, image captioner [65] and dense captioner [25]. Our model is able to generate rich and diverse captions for an image, compared to other paradigms. While the dense captioner is able to generate diverse descriptions than an image captioner by virtue of localized regions, our model can generate an even more number of captions from the combination of the bounding boxes.

Fig. 7 shows caption prediction examples for multiple box pair combinations. Based on the output of the POS predictor, we color the words of the caption as (red, green, blue) for (subj pred-obj) respectively. We note that, while the traditional dense captioning simply takes a single region as input and predicts one dominant description, in our framework, different captions can be obtained from different subject and object pairs. In addition, one can see that the predicted POS is correctly aligned with the words in the generated captions. Although the POS classification is not our target task, for completeness, we measure the accuracy of the MTTSNet POS estimation by comparing it with the ground truth POS, which is 89.7%. The detailed accuracies for subject, predicate, and object are 91.6%, 86.5%, and 90.9%, respectively.

4.4 Comparison with Scene Graph

Motivated by scene graph, which is derived from the VRD task, we extend to a new type of a scene graph, which we call "caption graph." Fig. 6 shows the caption graphs generated from our MTTSNet as well as the scene graphs from Neural Motifs [80]. For caption graph, we follow the same procedure with Neural Motifs, but replace the relationship detection network with our MTTSNet. In both methods, we use ground truth bounding boxes for fair comparison.

By virtue of being free form, our caption graph can have richer expression and information including attributes, whereas



Fig. 9. Qualitative comparison with visual relationship detection model [45]. The proposed relational captioning model is able to provide more detailed information than the traditional relationship detection model.

	mAP (%)	Img-Lv. Recall	METEOR
Direct Union	-	54.51	25.53
Union	1.66	54.30	24.82
Union+Coord.	1.90	64.11	30.81
Subj+Obj	1.90	55.06	25.09
Subj+Obj+Coord.	1.68	68.33	33.45
Subj+Obj+Union	1.94	68.32	33.77
TSNet (Ours)	1.99	68.44	34.49
Union (w/MTL)	1.70	66.39	31.62
Subj+Obj+Coord (w/MTL)	1.93	68.80	33.49
Subj+Obj+Union (w/MTL)	2.17	65.04	32.25
MTTSNet (Ours)	2.18	71.44	35.47
MTTSNet (Ours)+REM	2.21	73.36	35.65
MTTSNet (Ours) + REM (R)	2.33	77.44	37.63
Language Prior [45]	2.13	46.60	28.12
Shuffle-Then-Assemble [74]	2.20	69.98	29.50

TABLE 5

Ablation study on the relational dense captioning task with the VRD dataset. Our <code>TSNet</code> and <code>MTTSNet</code> (both with and without +REM) show top performance among the relational captioning models. (R) indicates ResNet-50 [18] as a backbone network instead of VGG-16. In addition, <code>MTTSNet</code> (both with and without +REM) shows favorable performance

against the VRD models [45], [74] with a noticeable margin.

the traditional scene graph is limited to a closed set of the subj-pred-obj triplet. For example, in Fig. 6-(b,d), given the same object "person," our model is able to distinguish the fine-grained category (*i.e.*, man vs boy and man vs woman). In addition, our model can provide more status information about the object (*e.g.*, standing, black), by virtue of the attribute contained in our relational captioning data. Most importantly, the scene graph can contain unnatural relationships (*e.g.*, tree-on-tree in Fig. 6-(c)), because the back-end relationship detection methods, *e.g.*, [80], predict object classes independently. In contrast, by predicting the full sentence for every object pair, the relational captioner can assign a more appropriate word with attributes for an object by considering the relations, *e.g.*, "Green leaf on a tree."

Lastly, our model is able to assign different words for the same object by considering the context (the man vs baseball player in Fig. 6-(d)), whereas the scene graph generator can only assign one most likely class (man). Thus, our relational captioning framework enables more diverse interpretation of the objects compared to the traditional scene graph generation models, which would be more favorable representation to scene context understanding.

4.5 Sentence-based Image and Region-pair Retrieval

Since our relational captioning framework produces richer image representations than other frameworks, it may have benefits on image and region-pair retrieval by sentence. Our method can directly deal with free-form natural language queries, whereas scene

		Phrase detection			Relationship detection		
		mAP	R@100	R@50	mAP	R@100	R@50
Language Prior [45]		2.07	17.03	16.17	1.52	14.70	13.86
VTransE [81]		-	22.42	19.42	-	15.20	14.07
VRL [41]		-	22.60	21.37	-	20.79	18.19
Vip-CNN [37]		-	27.91	22.78	-	20.01	17.32
DR-Net [10]		-	23.45	19.93	-	20.88	17.73
CAI [84]		-	19.24	17.60	-	17.39	15.63
PPR-FCN [82]		-	23.15	19.62	-	15.72	14.41
Yu et al. [79]		-	24.03	23.14	-	21.34	19.17
MTTSNet (Ours)		2.88	20.98	20.64	1.59	20.05	17.49
MTTSNet (Ours)+REM		2.91	21.54	21.39	1.64	20.70	17.74
MTTSNet (Ours)+REM	(R)	3.09	28.40	24.18	1.73	21.87	19.36
		TAD					

TABLE 6

Comparison of our MTTSNet with VRD models on the VRD metrics on the VRD dataset. (R) indicates ResNet-50 [18] as a backbone network instead of VGG-16. Despite the disadvantages for predicting complex captions compared to simple triplets, our MTTSNet and MTTSNet+REM show favorable or comparable performance against the VRD models. Also, note that most of the VRD models have the benefit of strong backbones such as ResNet, but our MTTSNet+REM (R) with ResNet-50 surpasses all the other competing methods even with the VRD metrics unfavorable to ours.

graph or VRD models require additional processing to handle the free-form queries. In this section, we evaluate our method on the retrieval task. Following the same procedure from [25] but with our relational captioning dataset, we randomly choose 1,000 images from the test set, and from these chosen images, we collect 100 query sentences by sampling four random captions from 25 randomly chosen images. The task is to retrieve the correct image for each query by matching it with the generated captions.

Our relational captioning based retrieval is done as follows. For every test image, we generate 100 region proposals from the RPN followed by NMS. To measure the degree of association, *i.e.*, matching score, between a query and a region pair in the image, we compute the probability that the query text may occur from the region pair by multiplying the probability of words over recursive steps. Among all the scores of the region pairs from the image, we take the maximum matching score value as a representative score of matching between the query text and the image. The retrieved images are sorted according to these computed matching scores.

We compare the retrieval performance with several baselines in Table 4. We measure *recall at top K*, R@K, which is the success ratio across all the queries that, by each given query, its ground-truth image is retrieved within top K ranks. We report $K \in \{1, 5, 10\}$ cases. We also report the median rank of the correctly retrieved images across all 1000 test images. We follow the same procedure by Johnson *et al.* of running through random test sets 3 times to report the average results. We add an additional retrieval result with a more competitive dense captioning model, TLSTM [73]. From the result, our proposed relational captioners show favorable

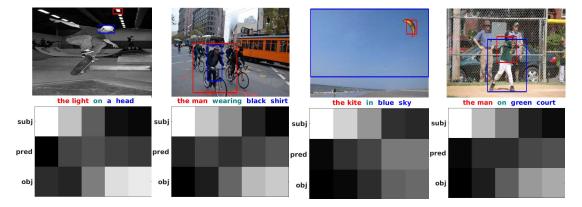


Fig. 10. Visualization of POS importance transition. Y-axis represents respective representative hidden values of Subject-Predicate-Object LSTMs, and X-axis represents words of each caption in order. subj-pred-obj are color-coded by red, green, and blue colors according to the output of the POS predictor, respectively. Each word in the captions comes from the corresponding LSTM.

performance against the baselines. This is meaningful because a region pair based method deals with a more difficult input form than that of the single region based approaches. Moreover, MTTSNet+REM consistently shows better retrieval performance compared to MTTSNet.

Fig. 8 shows the qualitative results on the sentence based image and region-pair retrieval. Given a sentence query, we show the retrieved images and their region pairs with the maximum matching score. Image retrieval based on our approach has a distinct advantage in that it retrieves images containing similar contextual relationships despite significant visual differences. More specifically, in the 3rd row of Fig. 8, our method can retrieve images with an abstract contextual relationship of "White sign near paved road." The retrieved images are visually diverse but share the same contextual information. Also, the natural language based retrieval from our framework is distinctive compared to traditional relationship detection methods (classification) which cannot handle natural language queries with variable length due to their fixed form input (i.e. subj-pred-obj). For example, in the 1st row, given a query that specifies the color "red," our model is able to retrieve images of a plane with red wings which VRD models are not capable of.

4.6 Comparison with VRD Model

In order to demonstrate the flexibility of our model's output, *i.e.*, natural language based sentences, we qualitatively compare our model with one of the benchmark models of visual relationship detection (VRD) task. We test the VRD benchmark model [45] and our MTTSNet (and with +REM). The comparison is shown in Fig. 9. While the output of the VRD model is limited to the subj-pred-obj triplet with a smaller number of classes in a closed set, the output of our model has more flexibility and

	words/img	words/box			
Image Cap. [65]	4.16	-			
Scene Graph [80]	7.66	3.29			
Dense Cap. [25]	18.41	4.59			
Relational Cap. (MTTSNet)	20.45	15.31			
Relational Cap. (MTTSNet+REM)	25.57	18.02			
TABLE 7					

Diversity comparison between image captioning, scene graph generation, dense captioning, and relational captioning frameworks. We measure the number of different words per image (words/img) and the number of words per bounding box (words/box). can contain more contextual information by virtue of being free form. For example, given the same object "person," our model is able to distinguish the fine-grained category, *i.e.*, man and woman. In addition, our model can provide rich information about the object (*e.g.*, smiling, gray) by virtue of leveraging attribute information of our relational captioning data. Thus, our relational captioning framework enables higher level interpretation of the objects compared to the relationship detection framework.

Since the output of the VRD task has a relatively simple form (i.e., subj-pred-obj triplet) compared to that of our captioning framework (caption with free-form and variable length), a VRD model is easier to train given the same relationship detection dataset. Thus, a direct comparison with a VRD model on the VRD dataset [45] is unfair for our method. Despite this, we perform quantitative comparisons with VRD models by restricting the output vocabulary of our model such that the words appeared in the VRD dataset without attributes are only used. We use the VRD dataset that contains in total 5000 images with 4000/1000 splits for train/test sets respectively. Similar to the construction process of our relational captioning dataset, we tokenize the form of triplet expression, i.e., subj-pred-obj, to form natural language expressions, and for each word, we assign the POS class from the triplet association. By tokenizing, we obtain 160 vocabularies for the VRD dataset.

We evaluate on this regime in Tables 5 and 6 with the relational captioning metrics and VRD metrics, respectively. Firstly, Table 5



Fig. 11. Failure cases of our model. The reasons for failure cases are often due to visual ambiguity and illumination. subj-pred-obj are color-coded by red, green, and blue colors according to the output of the POS predictor, respectively.

shows the comparisons with VRD models [45], [74] on the VRD dataset along with the ablation study. Overall, the ablation study shows similar trends to that of using our relational captioning dataset (*c.f.*, Table 2). Our TSNet and MTTSNet (both with and without +REM) show top performance among the relational captioning models, of which difference is with and without POS prediction (w/MTL), respectively. This suggests that, even on the VRD dataset, the triplet-stream component is still a strong baseline over others. Moreover, interestingly, while the POS classification appears to be an easy and basic task, adding the POS classification in the form of multi-task learning consistently helps the caption generation performance by a noticeable margin in our context, as shown in Tables 2 and 5.

In the last row, we show the performance of the VRD models by Lu *et al.* [45] and Yang *et al.* [74] with the relational captioning metrics. Note that these VRD models are designed specifically for triplet classification on the VRD dataset. Thus, in terms of mAP, it has an advantage compared to the results of the other relational captioning baselines. Nonetheless, compared to the VRD model, our relational captioners (especially our MTTSNet+REM) show favorable performance on Img-Lv Recall and METEOR with a notable margin. This suggests that the proposed relational captioning framework is advantageous in generating *diverse* and *semantically natural* expressions. On the other hand, VRD models are disadvantageous in these aspects because they use a closed vocabulary set and predict object classes individually without considering the context.

Table 6 shows the comparison between our MTTSNet (both with and without +REM) and other VRD models measured on the VRD metrics. Due to the difference of our output type to that of VRD, we use METEOR score thresholds proposed by [25] as the matching criteria between model outputs and ground truth labels. Among the three VRD tasks (predicate classification, phrase detection and relationship detection) defined in [45], we do not measure predicate classification because a simple classification is out of scope for our model, but context understanding. As shown in the table, our model shows favorable or comparable performance to the VRD models despite the fact that they are specifically designed for the VRD task. Also, note that most of the VRD methods take an advantage of strong backbone networks such as ResNet over our MTTSNet+REM that uses VGG-16. According to the table, our method with the ResNet-50 backbone performs better than all the other competing VRD methods. This is worth noting in that, as opposed to VRD, our output label space is more complex than that of VRD due to variable caption length and a much larger number of vocabulary.

4.7 Additional Analysis

Vocabulary statistics. In addition, we measure the vocabulary statistics and compare those of the frameworks in Table 7. The types of statistics measured are: 1) an average number of unique words that have been used to describe an image, and 2) an average number of words to describe each box. Specifically, we count the number of unique words in all the predicted sentences and present the average number per image or box. Thus, the metric is proportional to the amount of information we can obtain given an image or a fixed number of boxes. These statistics increase in the order of *Image Cap., Scene Graph, Dense Cap.*, and *Relational Cap* (both with and without +REM). In conclusion, the proposed relational captioning is favorable in diversity and

amount of information (especially when the REM module is added), compared to both of the traditional object-centric scene understanding frameworks, *i.e.*, *Dense Cap.* and *Scene Graph*.

Importance transition along the triple-LSTMs. Since we have the three state LSTMs to predict a single word, it might be questionable whether each LSTM learns their own semantic roles properly. To see the behavior of each LSTMs, we visualize the weight transition from each LSTM for each time step. For this, given a set of features fed to the triple-stream LSTMs, we compute the L2 norm of the LSTM hidden state vector for each time step as a measure of importance value. These values from the three LSTMs are normalized across time through mean value subtraction. These values can be regarded as information or importance quantities. Fig. 10 shows the transitions of the representative values across time. As the POS phase changes through subject-predicate-object, the weight of the subject LSTM consistently decreases while that of the object LSTM increases. The predicate LSTM has a relatively consistent intensity between subject and object LSTMs as the POS changes. Thus, LSTMs plausibly disentangle their own roles according to POS. In other words, each word in the captions comes from the corresponding LSTM, e.g., a subject word is generated from the subj-LSTM.

Discussion of the failure cases. Fig. 11 shows failure cases of our relational captioning. The captions generated from our method can be inaccurate for several reasons. One of the important factors is visual ambiguity. Ambiguity may come from visually similar but different objects (first column) or by geometric ambiguity (second column). Lastly, due to illumination, the model may describe the object with a different color (*e.g.*, "blue") (third column). Each of cases requires challenging capabilities, such as geometric reasoning, high resolution spatial representation learning, illumination invariance, *etc.*, which are all fundamental computer vision challenges. we postulate that these problems may be resolved by improving visual feature representation; we leave these failure cases as a future direction. Note that the predicted POS is still correctly aligned with the words in the generated captions.

5 CONCLUSION

We introduce relational captioning, a new notion which requires a model to localize regions of an image and describe each of the relational region pairs with natural language. To this end, we propose the MTTSNet, which facilitates POS aware relational captioning. In several sibling-tasks, we empirically demonstrate the effectiveness of our framework over scene graph generation and the traditional captioning frameworks.

Furthermore, our relational captioning can provide dense, diverse, abundant, high-level and interpretable representations in a caption form, which is a new way to represent imagery. This allows us to take several advantage over the existing tasks of VRD and {image, dense} captionings. Compared to VRD, our relational captioning deals with "openset" (or a much larger set) expression. The VRD task is restricted to subj-pred-obj combinations, of which term represents a fixed number of classes.² However, the natural language representation we use has free-form with varying lengths, which can represent uncountably many possibilities. In addition, as an object can be referred to with expressive and distinctive attributes, which cannot be done in the VRD task, *e.g.*,

^{2.} Suppose the number of classes of each term, subj, pred, and obj, is all same as C in the VRD task. Then, the number of all possible combination of VRD is limited to C^3 .

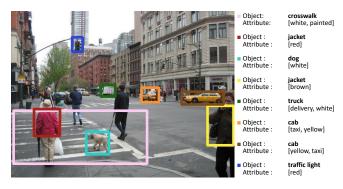


Fig. 12. A sample of the VG attributes dataset. Each bounding box is labeled with an object name and attributes (Attribute labels for a bounding box can be multiple).

a man vs. a boy wearing red hat, our output representation is more general. Finally, as we have shown in our results, our captioning has much higher recall than the other tasks, which can transfer sufficient information to subsequent algorithms and applications. In this regard, our work may open new interesting applications.

APPENDIX – ATTRIBUTE ENRICHMENT

As described in Sec. 4.1, we construct the relational captioning dataset based on the VG relationship dataset, but the dataset lacks attribute information in the captions. To compensate the lack of attributes, we leverage VG *attribute* dataset [35].

The configuration of the VG attribute dataset is depicted in Fig. 12. In the dataset, each object bounding box in an image is associated with "object name" and "attributes" of the object. Note that each object can have multiple attributes at the same time. Since the VG relationship dataset and the attribute dataset share the same image set, while *the ground-truth bounding boxes are not shared*, to associate the attribute with our captions, we conduct the process to find corresponding bounding boxes between datasets.

We simply find the attribute that matches the subject/object of the relationship label and assign it to the subject/object caption label. In particular, if an attribute label describes the same subject/object for a relationship label while an associated bounding box overlaps enough, the label is considered to be *matched* to the subject/object in the relationship label.

The specific procedure to decide association are as follows:

- 1) The category words of the subject / object in the relationship label and the object names of the attribute label must match, and the boxes should sufficiently overlap (higher IOU than 0.7),
- 2) Among the several boxes satisfying this condition, the box with the highest IOU is selected.
- 3) If a single box is associated with multiple attribute labels, we check the part-of-speech (POS) of candidate attribute labels using the NLTK POS tagger [44]. The words classified as (NN, VBN, VBG, VBD, JJ) are regarded as appropriate candidates for natural attributes. We filter out the other categories.
- 4) Among the attribute candidates, the words in the original relationship triplet (*i.e.* subj-pred-obj) are excluded from the candidates to prevent redundancy.
- 5) If there are still more than one candidate attributes satisfying all these conditions, we randomly select one among the candidates.

6) If a subject does not have any matched attribute, "the" is added.

Note that the VG relationship dataset and the VG attribute dataset share the same image set; thus, there exists object-level correspondences. Since we leverage the correspondences, thus, our dataset is likely to follow real distribution of image-description contents in the datasets.

Acknowledgements. This work was supported by the Institute for Information & Communications Technology Promotion (IITP) (2017-0-01772) grant funded by the Korea government. T.-H. Oh is partially supported by the IITP grants funded by the Korea government (MSIT) (No. 2019-0-01906, Artificial Intelligence Graduate School Program (POSTECH); No.2021-0-02068, Artificial Intelligence Innovation Hub).

REFERENCES


- Peter Anderson, Xiaodong He, Chris Buehler, Damien Teney, Mark Johnson, Stephen Gould, and Lei Zhang. Bottom-up and top-down attention for image captioning and visual question answering. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [2] Jacob Andreas, Marcus Rohrbach, Trevor Darrell, and Dan Klein. Neural module networks. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [3] Jimmy Ba and Diederik Kingma. Adam: A method for stochastic optimization. In International Conference on Learning Representations (ICLR), 2015.
- [4] Yu-Wei Chao, Yunfan Liu, Xieyang Liu, Huayi Zeng, and Jia Deng. Learning to detect human-object interactions. In *IEEE Winter Conference* on Applications of Computer Vision (WACV), 2018.
- [5] Fuhai Chen, Rongrong Ji, Xiaoshuai Sun, Yongjian Wu, and Jinsong Su. Groupcap: Group-based image captioning with structured relevance and diversity constraints. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [6] Jae Won Cho, Dong-Jin Kim, Jinsoo Choi, Yunjae Jung, and In So Kweon. Dealing with missing modalities in the visual question answerdifference prediction task through knowledge distillation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2021.
- [7] Ronan Collobert, Koray Kavukcuoglu, and Clément Farabet. Torch7: A matlab-like environment for machine learning. In *BigLearn, NIPS Workshop*, 2011.
- [8] Bo Dai, Sanja Fidler, Raquel Urtasun, and Dahua Lin. Towards diverse and natural image descriptions via a conditional gan. In *IEEE International Conference on Computer Vision (ICCV)*. IEEE, 2017.
- [9] Bo Dai and Dahua Lin. Contrastive learning for image captioning. In Advances in Neural Information Processing Systems (NIPS), 2017.
- [10] Bo Dai, Yuqi Zhang, and Dahua Lin. Detecting visual relationships with deep relational networks. *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [11] Michael Denkowski and Alon Lavie. Meteor universal: Language specific translation evaluation for any target language. In *The workshop* on statistical machine translation, 2014.
- [12] Jeffrey Donahue, Lisa Anne Hendricks, Sergio Guadarrama, Marcus Rohrbach, Subhashini Venugopalan, Kate Saenko, and Trevor Darrell. Long-term recurrent convolutional networks for visual recognition and description. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.
- [13] Chen Gao, Jiarui Xu, Yuliang Zou, and Jia-Bin Huang. Drg: Dual relation graph for human-object interaction detection. In *European Conference* on Computer Vision (ECCV), 2020.
- [14] Ross Girshick. Fast R-CNN. In IEEE International Conference on Computer Vision (ICCV), 2015.
- [15] Georgia Gkioxari, Ross Girshick, Piotr Dollár, and Kaiming He. Detecting and recognizing human-object interactions. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [16] Jiuxiang Gu, Handong Zhao, Zhe Lin, Sheng Li, Jianfei Cai, and Mingyang Ling. Scene graph generation with external knowledge and image reconstruction. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [17] Nitish Gupta, Kevin Lin, Dan Roth, Sameer Singh, and Matt Gardner. Neural module networks for reasoning over text. In *International Conference on Learning Representations (ICLR)*, 2020.
- [18] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *IEEE Conference on Computer Vision* and Pattern Recognition (CVPR), 2016.
- [19] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- [20] Han Hu, Jiayuan Gu, Zheng Zhang, Jifeng Dai, and Yichen Wei. Relation networks for object detection. In *IEEE Conference on Computer Vision* and Pattern Recognition (CVPR), 2018.
- [21] Ronghang Hu, Jacob Andreas, Trevor Darrell, and Kate Saenko. Explainable neural computation via stack neural module networks. In *European Conference on Computer Vision (ECCV)*, 2018.

- [22] Ronghang Hu, Jacob Andreas, Marcus Rohrbach, Trevor Darrell, and Kate Saenko. Learning to reason: End-to-end module networks for visual question answering. In *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [23] Wenhao Jiang, Lin Ma, Yu-Gang Jiang, Wei Liu, and Tong Zhang. Recurrent fusion network for image captioning. In *European Conference* on Computer Vision (ECCV), 2018.
- [24] Justin Johnson, Bharath Hariharan, Laurens van der Maaten, Judy Hoffman, Li Fei-Fei, C. Lawrence Zitnick, and Ross Girshick. Inferring and executing programs for visual reasoning. In *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [25] Justin Johnson, Andrej Karpathy, and Li Fei-Fei. Densecap: Fully convolutional localization networks for dense captioning. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [26] Andrej Karpathy and Li Fei-Fei. Deep visual-semantic alignments for generating image descriptions. In IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2015.
- [27] Dong-Jin Kim, Jinsoo Choi, Tae-Hyun Oh, and In So Kweon. Dense relational captioning: Triple-stream networks for relationship-based captioning. In *IEEE Conference on Computer Vision and Pattern Recognition* (CVPR), 2019.
- [28] Dong-Jin Kim, Jinsoo Choi, Tae-Hyun Oh, and In So Kweon. Image captioning with very scarce supervised data: Adversarial semi-supervised learning approach. In *Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2019.
- [29] Dong-Jin Kim, Jinsoo Choi, Tae-Hyun Oh, Youngjin Yoon, and In So Kweon. Disjoint multi-task learning between heterogeneous humancentric tasks. In *IEEE Winter Conference on Applications of Computer Vision (WACV)*, 2018.
- [30] Dong-Jin Kim, Xiao Sun, Jinsoo Choi, Stephen Lin, and In So Kweon. Detecting human-object interactions with action co-occurrence priors. In European Conference on Computer Vision (ECCV), 2020.
- [31] Dong-Jin Kim, Xiao Sun, Jinsoo Choi, Stephen Lin, and In So Kweon. Acp++: Action co-occurrence priors for human-object interaction detection. *IEEE Transactions on Image Processing (TIP)*, 2021.
- [32] Jin-Hwa Kim, Kyoung-Woon On, Woosang Lim, Jeonghee Kim, Jung-Woo Ha, and Byoung-Tak Zhang. Hadamard product for low-rank bilinear pooling. *arXiv preprint arXiv:1610.04325*, 2016.
 [33] Satwik Kottur, José MF Moura, Devi Parikh, Dhruv Batra, and Marcus
- [33] Satwik Kottur, José MF Moura, Devi Parikh, Dhruv Batra, and Marcus Rohrbach. Visual coreference resolution in visual dialog using neural module networks. In *European Conference on Computer Vision (ECCV)*, 2018.
- [34] Jonathan Krause, Justin Johnson, Ranjay Krishna, and Li Fei-Fei. A hierarchical approach for generating descriptive image paragraphs. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [35] Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie Chen, Yannis Kalantidis, Li-Jia Li, David A Shamma, et al. Visual genome: Connecting language and vision using crowdsourced dense image annotations. *International Journal of Computer Vision (IJCV)*, 123(1):32–73, 2017.
- [36] Michael F Land, Sophie M Furneaux, and Iain D Gilchrist. The organization of visually mediated actions in a subject without eye movements. *Neurocase*, 8(1):80–87, 2002.
- [37] Yikang Li, Wanli Ouyang, and Xiaogang Wang. VIP-CNN: A visual phrase reasoning convolutional neural network for visual relationship detection. In *IEEE Conference on Computer Vision and Pattern Recognition* (CVPR), 2017.
- [38] Yikang Li, Wanli Ouyang, Bolei Zhou, Jianping Shi, Chao Zhang, and Xiaogang Wang. Factorizable net: An efficient subgraph-based framework for scene graph generation. In *European Conference on Computer Vision (ECCV)*, 2018.
- [39] Yikang Li, Wanli Ouyang, Bolei Zhou, Kun Wang, and Xiaogang Wang. Scene graph generation from objects, phrases and region captions. In IEEE International Conference on Computer Vision (ICCV), 2017.
- [40] Yong-Lu Li, Siyuan Zhou, Xijie Huang, Liang Xu, Ze Ma, Hao-Shu Fang, Yanfeng Wang, and Cewu Lu. Transferable interactiveness knowledge for human-object interaction detection. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [41] Xiaodan Liang, Lisa Lee, and Eric P Xing. Deep variation-structured reinforcement learning for visual relationship and attribute detection. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2017.
- [42] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European Conference on Computer Vision (ECCV)*. Springer, 2014.
- [43] Daqing Liu, Hanwang Zhang, Feng Wu, and Zheng-Jun Zha. Learning to assemble neural module tree networks for visual grounding. In *IEEE International Conference on Computer Vision (ICCV)*, 2019.

- [44] Edward Loper and Steven Bird. Nltk: The natural language toolkit. In Proceedings of the ACL-02 Workshop on Effective tools and methodologies for teaching natural language processing and computational linguistics-Volume 1, pages 63–70. Association for Computational Linguistics, 2002.
- [45] Čewu Lu, Ranjay Krishna, Michael Bernstein, and Li Fei-Fei. Visual relationship detection with language priors. In *European Conference on Computer Vision (ECCV)*. Springer, 2016.
- [46] Jiasen Lu, Caiming Xiong, Devi Parikh, and Richard Socher. Knowing when to look: Adaptive attention via a visual sentinel for image captioning. *IEEE Conference on Computer Vision and Pattern Recognition* (CVPR), 2017.
- [47] Roozbeh Mottaghi, Xianjie Chen, Xiaobai Liu, Nam-Gyu Cho, Seong-Whan Lee, Sanja Fidler, Raquel Urtasun, and Alan Yuille. The role of context for object detection and semantic segmentation in the wild. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2014.
- [48] Vinod Nair and Geoffrey E Hinton. Rectified linear units improve restricted boltzmann machines. In *International Conference on Machine Learning (ICML)*, 2010.
- [49] Aude Oliva and Antonio Torralba. The role of context in object recognition. *Trends in cognitive sciences*, 11(12):520–527, 2007.
- [50] Vicente Ordonez, Girish Kulkarni, and Tamara L Berg. Im2text: Describing images using 1 million captioned photographs. In Advances in Neural Information Processing Systems (NIPS), 2011.
- [51] Julia Peyre, Ivan Laptev, Cordelia Schmid, and Josef Sivic. Weaklysupervised learning of visual relations. *IEEE International Conference* on Computer Vision (ICCV), 2017.
- [52] Bryan A Plummer, Arun Mallya, Christopher M Cervantes, Julia Hockenmaier, and Svetlana Lazebnik. Phrase localization and visual relationship detection with comprehensive linguistic cues. *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [53] Mengshi Qi, Weijian Li, Zhengyuan Yang, Yunhong Wang, and Jiebo Luo. Attentive relational networks for mapping images to scene graphs. In *IEEE Conference on Computer Vision and Pattern Recognition* (CVPR), 2019.
- [54] Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster R-CNN: Towards real-time object detection with region proposal networks. In Advances in Neural Information Processing Systems (NIPS), 2015.
- [55] Steven J Rennie, Etienne Marcheret, Youssef Mroueh, Jarret Ross, and Vaibhava Goel. Self-critical sequence training for image captioning. In IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2017.
- [56] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International Journal of Computer Vision (IJCV)*, 115(3):211–252, 2015.
- [57] Mohammad Amin Sadeghi and Ali Farhadi. Recognition using visual phrases. In IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2011.
- [58] Rakshith Shetty, Marcus Rohrbach, Lisa Anne Hendricks, Mario Fritz, and Bernt Schiele. Speaking the same language: Matching machine to human captions by adversarial training. In *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [59] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. In *International Conference* on Learning Representations (ICLR), 2015.
- [60] Khurram Soomro, Amir Roshan Zamir, and Mubarak Shah. UCF101: A dataset of 101 human actions classes from videos in the wild. arXiv preprint arXiv:1212.0402, 2012.
- [61] Nitish Srivastava, Geoffrey E Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. Dropout: a simple way to prevent neural networks from overfitting. *Journal of Machine Learning Research* (*JMLR*), 15(1):1929–1958, 2014.
- [62] Ganchao Tan, Daqing Liu, Meng Wang, and Zheng-Jun Zha. Learning to discretely compose reasoning module networks for video captioning. In International Joint Conference on Artificial Intelligence (IJCAI), 2020.
- [63] Junjiao Tian and Jean Oh. Image captioning with compositional neural module networks. In *International Joint Conference on Artificial Intelli*gence (IJCAI), 2020.
- [64] Subhashini Venugopalan, Lisa Anne Hendricks, Marcus Rohrbach, Raymond J Mooney, Trevor Darrell, and Kate Saenko. Captioning images with diverse objects. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [65] Oriol Vinyalš, Alexander Toshev, Samy Bengio, and Dumitru Erhan. Show and tell: A neural image caption generator. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.
- [66] Liwei Wang, Alexander Schwing, and Svetlana Lazebnik. Diverse and accurate image description using a variational auto-encoder with an

additive gaussian encoding space. In Advances in Neural Information Processing Systems (NIPS), 2017.

- [67] Wenbin Wang, Ruiping Wang, Shiguang Shan, and Xilin Chen. Exploring context and visual pattern of relationship for scene graph generation. In *IEEE Conference on Computer Vision and Pattern Recognition* (CVPR), 2019.
- [68] Xiaolong Wang, Ross Girshick, Abhinav Gupta, and Kaiming He. Nonlocal neural networks. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [69] Sanghyun Woo, Dahun Kim, Donghyeon Cho, and In So Kweon. Linknet: Relational embedding for scene graph. In Advances in Neural Information Processing Systems (NIPS), 2018.
- [70] Danfei Xu, Yuke Zhu, Christopher B Choy, and Li Fei-Fei. Scene graph generation by iterative message passing. In *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [71] Kelvin Xu, Jimmy Ba, Ryan Kiros, Kyunghyun Cho, Aaron Courville, Ruslan Salakhudinov, Rich Zemel, and Yoshua Bengio. Show, attend and tell: Neural image caption generation with visual attention. In *International Conference on Machine Learning (ICML)*, 2015.
- [72] Jianwei Yang, Jiasen Lu, Stefan Lee, Dhruv Batra, and Devi Parikh. Graph r-cnn for scene graph generation. In *European Conference on Computer Vision (ECCV)*, 2018.
- [73] Linjie Yang, Kevin Tang, Jianchao Yang, and Li-Jia Li. Dense captioning with joint inference and visual context. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [74] Xu Yang, Hanwang Zhang, and Jianfei Cai. Shuffle-then-assemble: learning object-agnostic visual relationship features. In *European Conference* on Computer Vision (ECCV), 2018.
- [75] Xu Yang, Hanwang Zhang, and Jianfei Cai. Learning to collocate neural modules for image captioning. In *IEEE International Conference on Computer Vision (ICCV)*, 2019.
- [76] Ting Yao, Yingwei Pan, Yehao Li, and Tao Mei. Exploring visual relationship for image captioning. In *European Conference on Computer Vision (ECCV)*, 2018.
- [77] Guojun Yin, Lu Sheng, Bin Liu, Nenghai Yu, Xiaogang Wang, Jing Shao, and Chen Change Loy. Zoom-net: Mining deep feature interactions for visual relationship recognition. In *European Conference on Computer Vision (ECCV)*, 2018.
- [78] Quanzeng You, Hailin Jin, Zhaowen Wang, Chen Fang, and Jiebo Luo. Image captioning with semantic attention. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [79] Ruichi Yu, Ang Li, Vlad I Morariu, and Larry S Davis. Visual relationship detection with internal and external linguistic knowledge distillation. In *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [80] Rowan Zellers, Mark Yatskar, Sam Thomson, and Yejin Choi. Neural motifs: Scene graph parsing with global context. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [81] Hanwang Zhang, Zawlin Kyaw, Shih-Fu Chang, and Tat-Seng Chua. Visual translation embedding network for visual relation detection. In IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2017.
- [82] Hanwang Zhang, Zawlin Kyaw, Jinyang Yu, and Shih-Fu Chang. Ppr-fcn: Weakly supervised visual relation detection via parallel pairwise r-fcn. In *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [83] Ji Zhang, Mohamed Elhoseiny, Scott Cohen, Walter Chang, and Ahmed Elgammal. Relationship proposal networks. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [84] Bohan Zhuang, Lingqiao Liu, Chunhua Shen, and Ian Reid. Towards context-aware interaction recognition for visual relationship detection. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.



Tae-Hyun Oh is an assistant professor with Electrical Engineering (adjunct with Graduate School of Al and Dept. of Creatiative IT Convergence) at POSTECH, South Korea. He is also a research director at OpenLab, POSCO-RIST, South Korea. He received the B.E. degree (First class honors) in Computer Engineering from Kwang-Woon University, South Korea in 2010, and the M.S. and Ph.D. degrees in Electrical Engineering from KAIST, South Korea in 2012 and 2017, respectively. Before joining POSTECH, he

was a postdoctoral associate at MIT CSAIL, Cambridge, MA, US, and was with Facebook AI Research, Cambridge, MA, US. He was a research intern at Microsoft Research in 2014 and 2016. He serves as an associate editor for the Visual Computer journal. He was a recipient of Microsoft Research Asia fellowship, Samsung HumanTech thesis gold award, Qualcomm Innovation awards, top research achievement awards from KAIST, and CVPR'20 outstanding reviewer award.



Jinsoo Choi received his B.S., M.S., and Ph.D. degrees in Electrical Engineering from Korea Advanced Institute of Science and Technology (KAIST) in 2013, 2015, and 2020 respectively. He is an incoming machine learning video engineer at Apple. He received the grand prize from the Electronic Times paper awards hosted by the Ministry of Science and ICT, Rep. of Korea, silver prize from Samsung Electro-Mechanics paper awards, silver prize from Samsung Humantech paper awards, Qualcomm Innovation awards,

recognition as top research achievements and top 1% research achievements from KAIST annual and biannual R&D reports. His research interests include deep learning, computer vision, and computer graphics with an emphasis on video enhancement and processing.



In So Kweon received the BS and MS degrees in mechanical design and production engineering from Seoul National University, Seoul, South Korea, in 1981 and 1983, respectively, and the PhD degree in robotics from the Robotics Institute, Carnegie Mellon University, Pittsburgh, Pennsylvania, in 1990. He is an professor with the Electrical Engineering Department, KAIST, South Korea. He worked for the Toshiba R&D Center, Japan, and joined the Department of Automation and Design Engineering, KAIST, Seoul,

South Korea, in 1992, where he is currently a professor with the Department of Electrical Engineering. He is a recipient of the Best Student Paper Runner-up Award at the IEEE Conference on Computer Vision and Pattern Recognition (CVPR 09). His research interests include camera and 3D sensor fusion, color modeling and analysis, visual tracking, and visual SLAM. He was the program co-chair for the Asian Conference on Computer Vision (ACCV 07) and was the general chair for the ACCV 12. He is also on the editorial board of the International Journal of Computer Vision. He is a member of the IEEE and KROS.



Dong-Jin Kim received the B.S. degree, M.S. degree, and Ph.D. degree in Electrical Engineering from Korea Advanced Institute of Science and Technology (KAIST), Daejeon, South Korea, in 2015, 2017, and 2021, respectively. He was a research intern in the Visual Computing Group, Microsoft Research Asia (MSRA). He was awarded a silver prize from Samsung Humantech paper awards and Qualcomm Innovation awards. His research interests include highlevel computer vision such as language and vi

sion and human behavior understanding. He is a student member of the IEEE.