



Universiteit
Leiden
The Netherlands

Benchmarking and analyzing iterative optimization heuristics with IOHprofiler

Wang, H.; Doerr, C.; Shir, O.M.; Bäck, T.H.W.

Citation

Wang, H., Doerr, C., Shir, O. M., & Bäck, T. H. W. (2020). Benchmarking and analyzing iterative optimization heuristics with IOHprofiler. *Gecco '20: Proceedings Of The 2020 Genetic And Evolutionary Computation Conference Companion*, 1043-1054. doi:10.1145/3377929.3389879

Version: Publisher's Version

License: [Licensed under Article 25fa Copyright Act/Law \(Amendment Taverne\)](#)

Downloaded from: <https://hdl.handle.net/1887/3279978>

Note: To cite this publication please use the final published version (if applicable).



Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler

Hao Wang¹, Diederick Vermetten³, Carola Doerr¹, Ofer M. Shir²,
Thomas Bäck³

¹Sorbonne Université, CNRS, LIP6, Paris, France

²Tel-Hai College and Migal Institute, Upper Galilee, Israel

³LIACS, Leiden University, The Netherlands

<http://gecco-2020.sigev.org/>

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).
GECCO '20 Companion, Cancún, Mexico
© 2020 Copyright held by the owner/author(s). 978-1-4503-7127-
8/20/07...\$15.00
<https://doi.org/10.1145/3377929.3389879>



1

1

Iterative Optimization Heuristic Profiler

- For **benchmarking** and **analyzing** iterative optimization heuristics (IOHs)
- **IOHprofiler** = IOHexperimenter + IOHanalyzer + IOHdata + IOHalgorithm
- **IOHexperimenter** – standardized experimental environment
- **IOHanalyzer** – ready-to-use, interactive analyses of experimental data
- **IOHdata** – a public, cloud-based data repository [in progress]
- **IOHalgorithm** – efficient implementation of some selected IOHs [in progress]

3

[Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020](#)

1


INTRODUCTION

2

[Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020](#)

2

IOHprofiler: Workflow

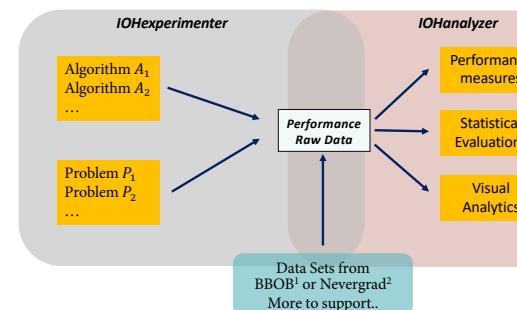

4

[Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020](#)

4

IOHprofiler - Philosophy

User to choose

- ✓ Which benchmark problems and algorithms to use
 - ✓ Easy to add new benchmark functions and algorithms

- ✓ Which performance measures to use

- ✓ Wide range of performance statistics:
 - ✓ Fixed-target runtimes (+distributions)
 - ✓ Fixed-budget results (+distributions)
 - ✓ Probabilities of success, ECDF curves, etc.

- ✓ Which statistical procedures to use [in progress]

- ✓ Kolmogorov-Smirnov, Friedman Test, Deep Statistical Comparison¹, etc.

- ✓ How to aggregate results

- ✓ Over target values, functions, and dimensions..
 - ✓ Highly interactive


¹Eftimov, Tome, Peter Korolec, and Barbara Korošec Seljak. "A novel approach to statistical comparison of meta-heuristic stochastic optimization algorithms using deep statistics." *Information Sciences* 417 (2017): 186-215.

5

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHanalyzer

- A web-based interface to analyze and visualize the performance of IOHs

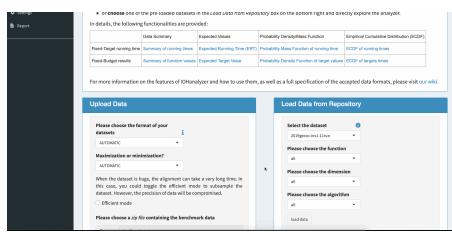

- Interactive plotting

- Statistical evaluation

- Built on R and C++

- Data formats:

- IOHexperimenter
 - BBOB
 - Facebook's Nevergrad
 - Generic two-column formats*

7

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHexperimenter

- A general-purpose benchmarking framework – instantiates to discrete, continuous, and mixed search spaces [in progress]

- Pre-installed problem sets

- Pseudo-Boolean Optimization (PBO) Suite¹
 - Integration of Black-Box Optimization Benchmarking (BBOB) Suite

- Easy to add / define new problems and suites

- Backbone implemented in C++ for speed; Python/R interfaces available

- Automatic data logging

- Running time, best-so-far objective value, etc.
 - User-chosen dynamic parameters of IOHs
 - IOHexperimenter data format

<https://iohprofiler.github.io/Suites/PBO/>

6

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHprofiler - Availability

- ✓ The source code:

- ✓ IOHexperimenter: <https://github.com/IOHprofiler/IOHexperimenter>

- ✓ IOHanalyzer: <https://github.com/IOHprofiler/IOHanalyzer>

- ✓ IOHdata: <https://github.com/IOHprofiler/IOHdata>

- ✓ Reference algorithms: <https://github.com/IOHprofiler/IOHalgorithms>

- ✓ IOHanalyzer is read-to-use online: <http://iohprofiler.liacs.nl/>

- ✓ Wiki page: <https://iohprofiler.github.io/>

- ✓ Documentation: <https://arxiv.org/abs/2007.03953>

- ✓ Exercises and data sets of this tutorial: <https://github.com/IOHprofiler/GECCO20-Tutorial>

8

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

2

BENCHMARKING

10

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

10

IOHexperimenter

- Implemented in C++ (1/14), non-trivial architecture (DPs)
- Effective wrappers in R and Python
- **Pseudo-Boolean Optimization¹ (PBO) suite:** $f: \{0,1\}^d \rightarrow \mathbb{R}$
 - Currently, 25 built-in combinatorial test-functions
 - OneMax, LeadingOnes feat. W-model²
 - Ising models, N-Queens problem, Maximum Independent Set, Low Autocorrelation Binary Sequences, Concatenated Trap, NK landscape
 - Extendible to any test functions following the interface

¹Carola Doerr, Furong Ye, Naama Horesh, Hao Wang, Ofer M. Shir, and Thomas Bäck. "Benchmarking discrete optimization heuristics with IOHprofiler." *Applied Soft Computing* 88 (2020): 106027.

²Weise, Thomas, and Zijun Wu. "Difficult features of combinatorial optimization problems and the tunable W-model benchmark problem for simulating them." In *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, pp. 1769-1776. 2018.

12

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

12

Benchmarking

- Run each pair of (A, f, d) for several times independently
 - Estimate the empirical distribution function:
$$\{v_1, v_2, \dots, v_r\} \rightarrow \hat{F}_V \quad \{t_1, t_2, \dots, t_r\} \rightarrow \hat{F}_T$$
- Stopping Criteria? e.g., a budget on the function evaluation, or a target function value to hit
- How to determine the number of runs/repetitions r ? – to obtain enough data/evidence
- How to determine which test functions to use?

11

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

11

IOHexperimenter

- **Integration of Black-Box Optimization Benchmarking (BBOB) suite¹:** $f: S \subseteq \mathbb{R}^d \rightarrow \mathbb{R}$
 - **24** built-in continuous test functions
- **12** optimization algorithms implemented in C++
 - <https://github.com/IOHprofiler/IOHalgorithm>
 - Python and R interface to those algorithm [in progress]
- Benchmark data on those 12 algorithms
 - <https://github.com/IOHprofiler/IOHdata>
 - All 25 test problems
 - 11 runs of each algorithms
 - $d \in \{16, 100, 625\}$

¹<https://github.com/numbbo/coco>

13

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

13

12 Reference Algorithms

(more to come, your contributions most appreciated!)

- gHC: Greedy Hill Climber: flip 1 bit/iteration
- RLS: Randomized Local Search: flips 1 random bit/iteration
- $(1+\lambda)$ EAs with standard bit mutation
- $(1+\lambda)$ EAs with normalized bit mutation and self-adjusting means [YeDB'19]
- $(1+\lambda)$ EAs with normalized bit mutation and self-adjusting means and variance control [YeDB'19]
- $(1+\lambda)$ EAs with log-normal self-adaptive mutation rates [BäckS96]
- fast GA from [DoerrLMN GECCO'17]
- self-adjusting 2-rate $(1+\lambda)$ EA from [DoerrGWY GECCO'17]
- self-adjusting $(1+(\lambda, \lambda))$ GA from [DoerrD Algorithmica'18]
- (μ, λ) “vanilla”/textbook GA
- UMDA

Strong focus on “textbook” algorithms and recent developments from the theory community
→ your contributions are highly welcome!

14

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

Pseudo-Boolean Optimization (PBO) suite

- F1: OneMax
- F2: LeadingOnes
- F3: Harmonic Linear Function
- F4-F10: W-Model¹ on top of OneMax (W-model allows to scale effective dimension, epistasis, neutrality, ruggedness, fitness plateaus, etc.)
- F11-F17: W-Model¹ on top of LeadingOnes
- F18: LABS: Low Autocorrelation Binary Sequences
- F19: Ising Model: Ring
- F20: Ising Model: Torus
- F21: Ising Model: Triangular (Isometric 2D Grid)
- F22: MIVS: Maximum Independent Vertex Set
- F23: N-Queens Problem
- F24: Concatenated Trap
- F25: NK landscape

Thousands of combinations are possible, our implementation covers the whole W model

¹Weise, Thomas, and Zijun Wu. "Difficult features of combinatorial optimization problems and the tunable W-model benchmark problem for simulating them." In *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, pp. 1769-1776. 2018.

15

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

PBO: W-model


- F4 – F17: OneMax transformed by the so-called W-model
 - **Dummy variables:** $(x_1, \dots, x_d) \rightarrow (x_{i_1}, \dots x_{i_m})$, $m < d$
 $i_1, \dots i_m$ are random chosen from $[1..d]$
 - **Neutrality:** $(\underbrace{x_1, \dots, x_\mu}_{x'_1}, \underbrace{x_{\mu+1}, \dots, x_{2\mu}}_{x'_2}, \dots, \underbrace{x_{d-\mu+1}, \dots, x_d}_{x'_{d/\mu}})$
 x'_i 's are the majority vote in each block
 - **Epistasis:** local permutations
 - **Fitness perturbation**

16

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

Black-Box Optimization Benchmarking (BBOB)

- Single-objective, continuous, black-box, (noisy) optimization tasks
- Widely used by many scientists and conference, e.g. GECCO Workshop for Real-Parameter Optimization
- 24 test functions
 - 3 unimodal, separable (e.g., sphere)
 - 7 unimodal, non-separable (e.g., bent cigar)
 - 2 multimodal, separable (e.g., Rastrigin)
 - 12 multimodal, non-separable (e.g., Schwefel)
- <https://coco.gforge.inria.fr/>
- <https://github.com/numbbo/coco>

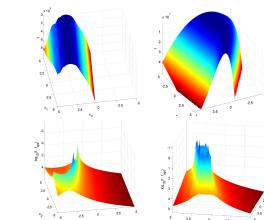

17

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

16

17

IOHexperimenter: Problem Instances

- PBO – multiplicative, additive, and XOR shifting; permutation of variables

$$\tilde{f} := af(\sigma(\mathbf{x} \oplus \mathbf{z})) + b$$

- BOB – each test function is modified ‘slightly’ by:

- Translation and rotation of the search space¹

$$\tilde{f} := f(\mathbf{R}(\mathbf{x} + \mathbf{x}_{\text{offset}})) + y_{\text{offset}}$$

- Small irregularities on the function landscape¹

¹Hansen, Nikolaus, Steffen Finck, Raymond Ros, and Anne Auger. “Real-parameter black-box optimization benchmarking 2009: Noisy functions definitions.” (2009).

18

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHexperimenter – C Interface

- A simple interface..

```
#include "src/IOHprofiler_experimenter.hpp"

void _run_experiment() {
    std::string configName = "./configuration.ini";
    /// An example for PBO suite.
    IOHprofiler_experimenter<int> experimenter(configName, evolutionary_algorithm);

    /// An example for BOB suite.
    /// IOHprofiler_experimenter<double> experimenter(configName, random_search);
    experimenter._set_independent_runs(10);
    experimenter._run();
}
```

19

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHexperimenter – C Interface

- Configuration file

```
[suite]
suite_name = PBO
problem_id = 1-5
instance_id = 1
dimension = 16

[logger]
output_directory = .
result_folder = Experiment
algorithm_name = (1+1)_EA
algorithm_info = An_EA_algorithm

[observer]
complete_triggers = false
update_triggers = true
number_interval_triggers = 0
number_target_triggers = 0
base_evaluation_triggers = 1
```

Specify which pre-installed suite to use

Select a subset of problems

Control when to register a data record

20

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHexperimenter – R interface

- Wrappers enable modern *look-n-feel* in scripting languages

- To install the R interface:

```
R> install.packages("IOHexperimenter")
R> library(IOHexperimenter)
```

- Compilation might take a while (we are working on pre-compiled binary packages for the common platform)

21

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

20

21

IOHexperimenter – R interface

- Create an experiment:

```
R> set.seed(42) # to create reproducible results.  
R> experimenter <- IOHexperimenter(  
+   suite = "PBO",  
+   dims = c(16, 100),  
+   functions = c(1, 2, 19, 23),  
+   instances = 1:5, algorithm.name = 'RLS',  
+   data.dir = './data'  
+ )
```

- **instances**: 1) translation, and 2) permutation of binary string
- **data.dir**: The path to the folder where (raw) benchmark data are stored

22

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHexperimenter – R interface

- Iterate over the test problems:

```
R> problem <- next_problem(experimenter)  
R> print(problem)  
IOHproblem (Suite PBO: Instance 1 of function OneMax 16D)
```

- And use it for your algorithms:

```
while (!is.null(p)) {  
  algorithm(p$dimension, p$obj_func, budget = 1e3 * p$dimension,  
           target_hit = p$target_hit)  
  p <- next_problem(experimenter)  
}
```

- We will cover the Python interface in the hands-on session!

23

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

DATA FORMAT


3

24

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHprofiler Data Format

- File structure – text files,
 - *Meta data* – summary of a test problem/function.
 - *Raw data* – running times/function values for each function and dimension.

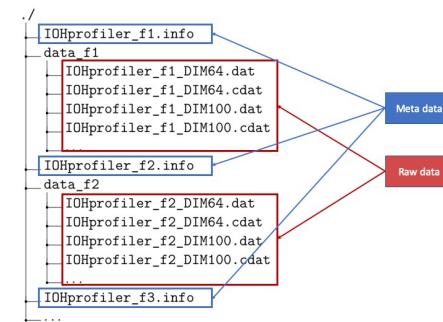

25

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

25

IOHprofiler Data Format

Meta data – naming convention, e.g., IOHprofiler_f1_OneMax.info

IOHprofiler_f<function ID>[_function name].info

- Here, <function ID> is required. [_function name] is optional.
- function ID can take either an integer or a string as its value.
- function name is only *optional*.

```
suite = 'PBO', funcId = 10, DIM = 100, algId = '(1+1) fGA'
%
data_f10/IOHprofiler_f10_DIM625.dat, 1:1953125|5.59000e+02,
1:1953125|5.59000e+02, 1:1953125|5.59000e+02, 1:1953125|5.54000e+02,
1:1953125|5.59000e+02, 1:1953125|5.64000e+02, 1:1953125|5.54000e+02,
1:1953125|5.59000e+02, 1:1953125|5.49000e+02, 1:1953125|5.54000e+02,
1:1953125|5.49000e+02
suite = 'PBO', funcId = 10, DIM = 625, algId = '(1+1) fGA'
%
data_f10/IOHprofiler_f10_DIM625.dat, 1:1953125|5.59000e+02,
1:1953125|5.59000e+02, 1:1953125|5.59000e+02, 1:1953125|5.54000e+02,
1:1953125|5.59000e+02, 1:1953125|5.64000e+02, 1:1953125|5.54000e+02,
1:1953125|5.59000e+02, 1:1953125|5.49000e+02, 1:1953125|5.54000e+02,
```

26

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

26

IOHprofiler Data Format

Raw data – naming convention, e.g., IOHprofiler_f1_OneMax.info

IOHprofiler_f<function ID>_DIM_<dimension>.[t|i|c]dat

- Using **IOHexperimenter**, you could produce four types of raw data files: *.dat, *.idat, *.tdat, and *.cdat, which share exactly the same format and only differ in the logging events at which data are recorded.

```
"function evaluation" "current f(x)" "best-so-far f(x)" "current af(x)+b" "best af(x)+b" "parameter name"
1 +2.95000e+02 +2.95000e+02 +2.95000e+02 0.00000 ...
2 +2.96000e+02 +2.96000e+02 +2.96000e+02 0.001600 ...
4 +3.07000e+02 +3.07000e+02 +3.07000e+02 0.219200 ...
9 +3.11000e+02 +3.11000e+02 +3.11000e+02 0.006400 ...
12 +3.12000e+02 +3.12000e+02 +3.12000e+02 0.001600 ...
16 +3.16000e+02 +3.16000e+02 +3.16000e+02 0.006400 ...
20 +3.17000e+02 +3.17000e+02 +3.17000e+02 0.001600 ...
23 +3.28000e+02 +3.28000e+02 +3.28000e+02 0.027200 ...
27 +3.39000e+02 +3.39000e+02 +3.39000e+02 0.059200 ...
"function evaluation" "current f(x)" "best-so-far f(x)" "current af(x)+b" "best af(x)+b" "parameter name"
1 +3.40000e+02 +3.20000e+02 +3.20000e+02 1.00000 ...
24 +3.44000e+02 +3.44000e+02 +3.44000e+02 2.00000 ...
60 +3.64000e+02 +3.64000e+02 +3.64000e+02 3.00000 ...
"function evaluation" "current f(x)" "best-so-far f(x)" "current af(x)+b" "best af(x)+b" "parameter name"
... ... ... ... ...
```

27

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

27

IOHprofiler Data Format

Logging Events

- **[Mandatory]** *Target-based tracking* (*.dat): a record is collected if an improvement on the “best-so-far f(x)” value is observed.
- *Interval tracking* (*.idat): a record is collected every τ -th function evaluation, where the interval τ can be controlled by the user.
- *Time-based tracking* (*.tdat): a record is collected when the user-specified checkpoints on the running time are reached. These checkpoints are evenly spaced in the \log_{10} scale.
- *Complete tracking* (*.cdat): a record is collected for every function evaluation.

28

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

28

PERFORMANCE ANALYSES




29

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

29


IOHAnalyzer: How to assess Empirical Performance?

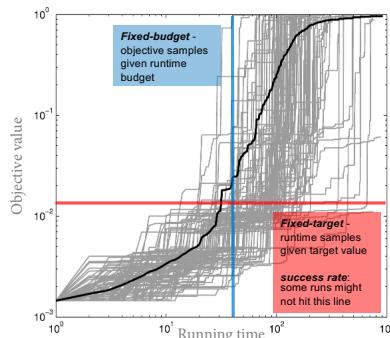

30

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHanalyzer: fixed-target running times

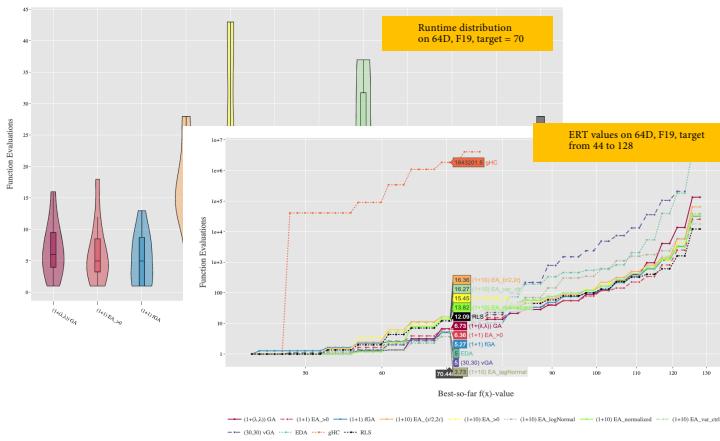

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHanalyzer: fixed-target running times


- Running time – random variable
 - Parameterized by *a target value*

$$T(f_{\text{target}}) \in \mathbb{N}_{>0}$$

- The number of runs – n

$$\{t_1(f_{\text{target}}), \dots, t_r(f_{\text{target}})\}$$

- Successful? $t_i(f_{\text{target}}) < \infty$
 - Unsuccessful? $t_i(f_{\text{target}}) = \infty$
 - Number of successes $N_{\text{succ}} = \sum_{i=1}^r \mathbf{1}(t_i(f_{\text{target}}) < \infty)$

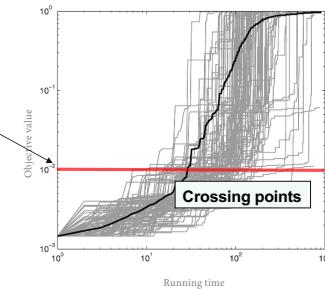

33

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020


IOHanalyzer: fixed-budget results

- Function value – random variable
 - Parameterized by *a budget value*

$$V(b) \in \mathbb{R}, b \leq B$$

- The number of runs – n

$$\{v_1(b), \dots, t_r(b)\}$$

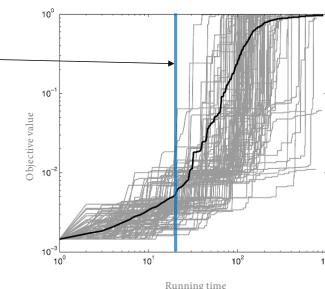

33

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHalyzer: Descriptive Statistics

- Sample mean, median, standard deviation...
- Sample quantiles, e.g., 2%, 5%, ..., 98%
- Empirical success rate
- **Expected Running Time (ERT)**
- **Empirical Cumulative Distribution Functions (ECDFs)**

34

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHalyzer: Descriptive Statistics

| algid | target | mean | median | sd | 2% | 5% | 10% | 25% | 50% | 75% | 90% | 95% | 98% | ERT | runs | ps |
|-------|--------|---------|----------|-------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------------|----|
| All | All | All | All | All | All | All | All | All | All | All | All | All | All | All | A | A |
| 1 | RLS | 1184 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 11 | 1 |
| 2 | RLS | 1330.22 | 61 | 58 | 16.77 | 35 | 35 | 35 | 44 | 58 | 76 | 78 | 78 | 81 | 61 | 11 |
| 3 | RLS | 1476.44 | 198.18 | 199 | 23.29 | 166 | 166 | 166 | 180 | 199 | 200 | 215 | 215 | 246 | 198.18 | 11 |
| 4 | RLS | 1622.66 | 416.18 | 405 | 69.35 | 335 | 335 | 335 | 366 | 405 | 412 | 523 | 523 | 552 | 416.18 | 11 |
| 5 | RLS | 1768.88 | 716.64 | 704 | 85.05 | 568 | 568 | 568 | 643 | 704 | 755 | 820 | 820 | 864 | 716.64 | 11 |
| 6 | RLS | 1915.1 | 1181.64 | 1137 | 133.01 | 1013 | 1013 | 1013 | 1077 | 1137 | 1247 | 1361 | 1361 | 1406 | 1181.64 | 11 |
| 7 | RLS | 2061.32 | 1906.18 | 1911 | 214.23 | 1430 | 1430 | 1430 | 1760 | 1911 | 2088 | 2110 | 2110 | 2122 | 1906.18 | 11 |
| 8 | RLS | 2207.54 | 3576.18 | 3496 | 622.67 | 2563 | 2563 | 2563 | 3267 | 3496 | 3587 | 4453 | 4453 | 4731 | 3576.18 | 11 |
| 9 | RLS | 2353.76 | 14338.64 | 15885 | 6119.17 | 6430 | 6430 | 6430 | 8898 | 15885 | 18850 | 21707 | 21707 | 22417 | 14338.64 | 11 |
| 10 | RLS | 2499.98 | 42210.14 | 43953 | 14424.28 | 23409 | 23409 | 23409 | 27858 | 43953 | 49470 | 53472 | 63202 | 63202 | 1158281.57 | 7 |

Showing 1 to 10 of 11 entries

Previous 1 2 Next

35

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHalyzer: ECDFs

- Aggregate ECDFs
 - Over multiple **targets**: $\mathcal{V} = \{v_1, v_2, \dots\}$

$$\hat{F}_T(t ; A, f, d, \mathcal{V}) = \frac{1}{r|\mathcal{V}|} \sum_{v \in \mathcal{V}} \sum_{i=1}^r \mathbb{1}(t_i(A, f, d, v) \leq t).$$


- Over multiple **functions**: $\mathcal{F} = \{f_1, f_2, \dots\}$

$$\hat{F}_T(t ; A, \mathcal{F}, d, \mathcal{V}) = \frac{1}{r|\mathcal{V}|} \sum_{f \in \mathcal{F}} \sum_{v \in \mathcal{V}} \sum_{i=1}^r \mathbb{1}(t_i(A, f, d, v) \leq t).$$

36

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHalyzer: ECDFs

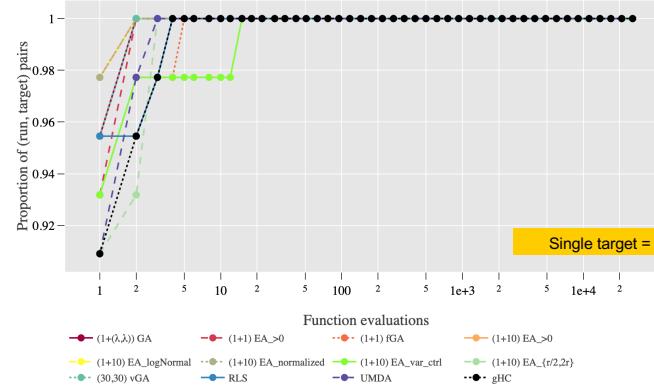


37

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020


36

37

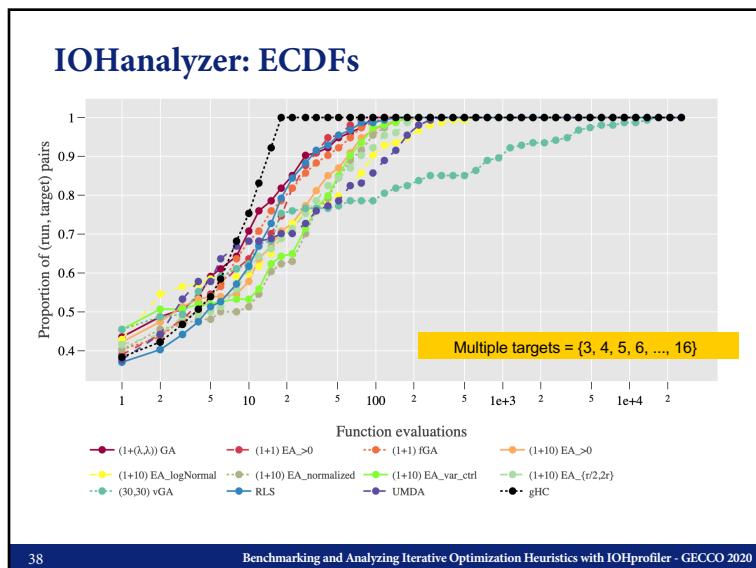

38

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

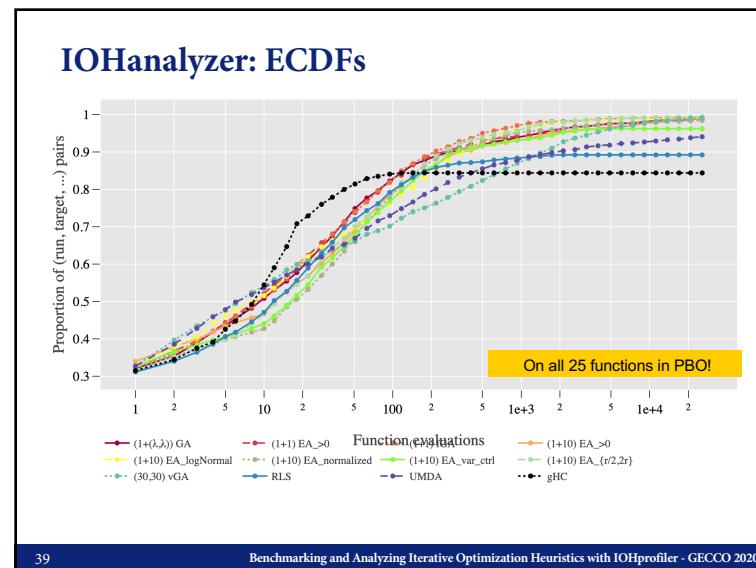

39

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020



40

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

40

- ### Hands-on Session
- ✓ The best way to get familiar with a software
 - ✓ Online version for this tutorial: <http://iohprofiler.liacs.nl/>
 - ✓ The material of the hands-on session can be found here: <http://liacs.leidenuniv.nl/~csnaco/GECCO2020/>
 - ✓ https://colab.research.google.com/drive/1c_mozIXHQ7YxvlC0UOY9gi6glrj3vBe6?usp=sharing
 - ✓ Some example data set can be download here: <https://github.com/IOHprofiler/IOHdata>

41

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

41

Hands-on Session

If you want to play with IOHanalyzer locally, you need a R installation first..

✓ to install R: <https://cran.r-project.org/>

✓ to install IOHanalyzer:

```
R> install.packages('IOHanalyzer')
```

✓ to start the web-based server locally:

```
R> library('IOHanalyzer')
```

```
R> runServer()
```

```
Loading required package: shiny
```

```
Listening on http://127.0.0.1:3943
```

42

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHprofiler – Examples of Use-Cases

GECCO workshop papers:

1. Carola Doerr, Furong Ye, Naama Horesh, Hao Wang, Ofer M. Shir, and Thomas Bäck. Benchmarking Discrete Optimization Heuristics with IOHprofiler. GECCO'19
2. Borja Calvo, Ofer M. Shir, Josu Ceberio, Carola Doerr, Hao Wang, Thomas Bäck, and Jose A. Lozano. Bayesian Performance Analysis for Black-Box Optimization Benchmarking. GECCO'19
3. Ivan Ignashov, Arina Budzalova, Maxim Budzalov, and Carola Doerr. Illustrating the Trade-Off between Time, Quality, and Success Probability in Heuristic Search. GECCO'19
4. Nathan Buskulic and Carola Doerr. Maximizing Drift is Not Optimal for Solving OneMax. GECCO'19

Usage in teaching:

1. Natural Computing at LIACS, 3rd year bachelor Computer Science
2. Evolutionary Algorithms at LIACS, 1st year master Computer Science

44

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

IOHprofiler – Examples of Use-Cases

Journal papers:

1. Hao Wang and Diederick Vermetten and Furong Ye and Carola Doerr and Thomas Bäck: IOHanalyzer: Performance Analysis for Iterative Optimization Heuristic. arXiv, [arXiv:2007.03953](https://arxiv.org/abs/2007.03953)
2. Carola Doerr, Furong Ye, Naama Horesh, Hao Wang, Ofer M. Shir, Thomas Bäck: Benchmarking discrete optimization heuristics with IOHprofiler. Appl. Soft Comput. 88: 106027 (2020)

PPSN full papers:

1. Furong Ye, Hao Wang, Carola Doerr, Thomas Bäck: Benchmarking a $(\mu+\lambda)$ Genetic Algorithm with Configurable Crossover Probability. To appear at PPSN'20

CEC full papers:

1. Diederick Vermetten, Hao Wang, Carola Doerr, Thomas Bäck: Towards Dynamic Algorithm Selection for Numerical Black-Box Optimization: Investigating BBOB as a Use Case. To appear at GECCO'20

2. Diederick Vermetten, Hao Wang, Carola Doerr and Thomas Bäck. Integrated vs. Sequential Approaches for Selecting and Tuning CMA-ES Variants. To appear at GECCO'20

3. Naama Horesh, Thomas Bäck, Ofer M. Shir. Predict or Screen Your Expensive Assay? DoE vs. Surrogates in Experimental Combinatorial Optimization. GECCO'19

4. Nguyen Dang, Carola Doerr. Hyper-Parameter Tuning for the $(1+(\lambda))$ GA. GECCO'19

5. Carola Doerr, Furong Ye, Sander van Rijn, Hao Wang, Thomas Bäck. Towards a theory-guided benchmarking suite for discrete black-box optimization heuristics: profiling $(1 + \lambda)$ EA variants on OneMax and LeadingOnes. GECCO'18

43

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

Work in progress

✓ Extension of benchmark problems and reference algorithms

✓ Constant improvements of the User-Experience (UX)

✓ Efficiency

✓ Report generation [in progress]

✓ Additional visualizations and statistical analysis tools

✓ Support for mixed-integer and noisy problems

Suggestions and contributions are very welcome!

45

Benchmarking and Analyzing Iterative Optimization Heuristics with IOHprofiler - GECCO 2020

44

Want to get involved?

You can contribute by providing (or suggesting)

- Feedback
- benchmark problems
- Reference algorithms
- Performance statistics
- Ideas how to combine performance analysis with landscape analysis
- Other features that would improve IOHprofiler



... and by simply using IOHprofiler, exporting its output for your presentation/manuscript, and sharing your user-experience!

Acknowledgments

We thank the following colleagues for contributions and feedback on IOHprofiler and/or discussions around the topic of benchmarking IOHs:

- Furong Ye, Diederick Vermetten, Sander van Rijn from Leiden University, NL
- Arina Buzdalova, Maxim Buzdalov, and students from ITMO University, Russia
- Borja Calvo, Josu Ceberio, and Jose A. Lozano from San Sebastián, Spain
- Thomas Weise from Heifei University, China
- Naama Horesh and Assaf Israeli from Migal Institute, Israel
- Dirk Sudholt from Sheffield University, UK
- Anne Auger, Dimo Brockhoff, and Niko Hansen from INRIA, France

We acknowledge financial support from

- Chinese scholarship council (CSC No. 201706310143)
- ANR-11-LABX-0056-LMH,
- Paris Ile-de-France Region
- COST Action CA15140 on Improving Applicability of Nature-Inspired Optimisation by Joining Theory and Practice (ImAppNIO)